




# QPM553

## QuickSert CR™ POLYMER MULTI-PORT TEES 1" INLET X OUTLET W/ 1/2" OUTLET PORTS

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

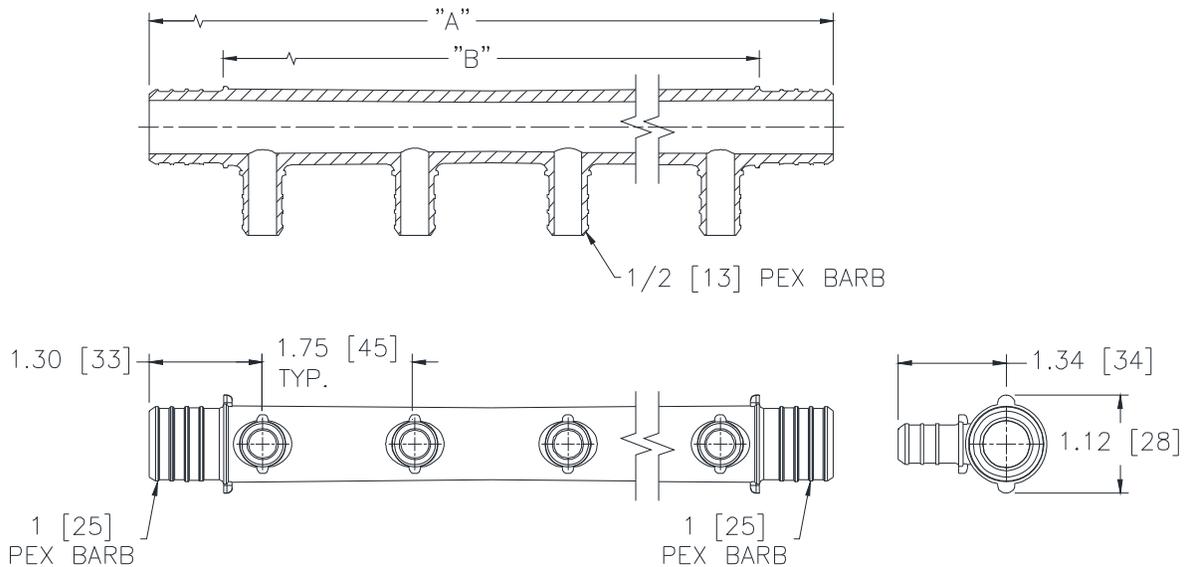

\*SHOWN AS QPM553-4

QuickSert CR™ Polymer Multi-Port Tees			
Part Number	Description	"A" In [mm]	"B" In [mm]
QPM553-3	(1) 1" PEX Crimp Inlet and Outlet w/ (3) 1/2" PEX Crimp Outlet Ports	6.1 [155]	4.4 [112]
QPM553-4	(1) 1" PEX Crimp Inlet and Outlet w/ (4) 1/2" PEX Crimp Outlet Ports	7.9 [201]	6.2 [158]
QPM553-5	(1) 1" PEX Crimp Inlet and Outlet w/ (5) 1/2" PEX Crimp Outlet Ports	9.6 [244]	7.9 [201]

### ENGINEERING SPECIFICATION: QPM553

Zurn QuickSert CR™ Multi-Port tees. The QPM553-\_\_ Tee is used to supply different fixtures from the main line. Molded from Acudel®. Multi-Port Tees, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. Multi-Port Tees are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, and CSA B137.5, and ASTM F2159.

### ACCESSORIES

- \_\_\_\_ QCLP3X            1/2 [13] QICKCLAMP™ CRIMP RING
- \_\_\_\_ QCLP5X            1 [25] QICKCLAMP™ CRIMP RING
- \_\_\_\_ QCR3X             1/2 [13] COPPER CRIMP RING
- \_\_\_\_ QCR5X             1 [25] COPPER CRIMP RING

\* Regularly furnished unless otherwise specified.