

OMSSL-LED-101

Motion Activated LED Security Light

20W Dual-Head Sensor Floodlight

Catalog Number:


Project Name:

Note:



Type:



DIMENSION:

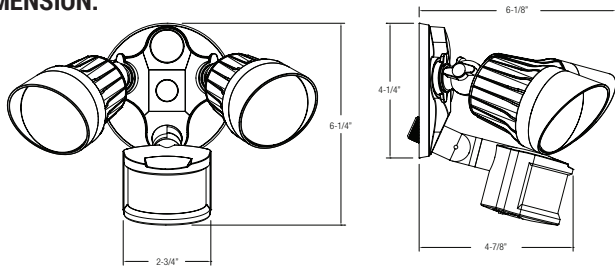

PHOTOMETRICS:

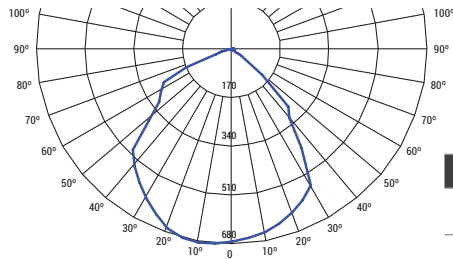

APPLICATIONS:

The Oracle LED motion Security lighting is now just a motion away. Providing increased safety, security, and peace of mind, it can be easily installed quickly and safely. It saves additional energy by utilizing the dusk-to-dawn feature, supplying full light protection when motion is detected.

FEATURES:

- Dual adjustable light heads, flexible and cover a wide area
- Precision die-cast aluminum housing
- 360° rotation lens hood
- Low power consumption, equivalent to 120W halogen light
- Motion activated and manual on-off override
- Adjustable detection range and time settings
- Up to 180° wide sensor angle and range up to 70 feet detection distance
- Easy and fast installation
- DLC premium qualified**

SPECIFICATIONS:

LUMENS	1800 lumens
WATTAGE	20W
CCT	30K, 40K, 50K
CRI	80
COLOR CONSISTENCY	7-step MacAdam Ellipse binning
LIGHT EFFICIENCY	90 lumens/watt
BEAM ANGLE	100°
VOLTAGE	120V
POWER FREQUENCY	50/60 Hz
DETECTION RANGE	150°, 180°
DETECTION DISTANCE	Max. 70 ft (adjustable)
TIME SETTING	From 10 sec to 5 min
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	14°F - 104°F



Ordering Guide > Example: OMSSL-LED-101-1800L-120-30K-150-WH

OMSSL-LED-101					
SERIES	PERFORMANCE	VOLTAGE	CCT	DETECTION RANGE	FINISH
OMSSL-LED-101	1800L - 900 lumens/head	120 - 120V	30K - 3000K 40K - 4000K 50K - 5000K	150 - 150° angle 180 - 180° angle	WH - White BZ - Bronze

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

Issued-B1118-Rev. 1