



ABRASION  
RESISTANT



"COLD-FLEX"  
MATERIALS



EASY SLIDE




OIL  
RESISTANT



STATIC  
DISSIPATIVE



TRANSPARENT  
CONSTRUCTION

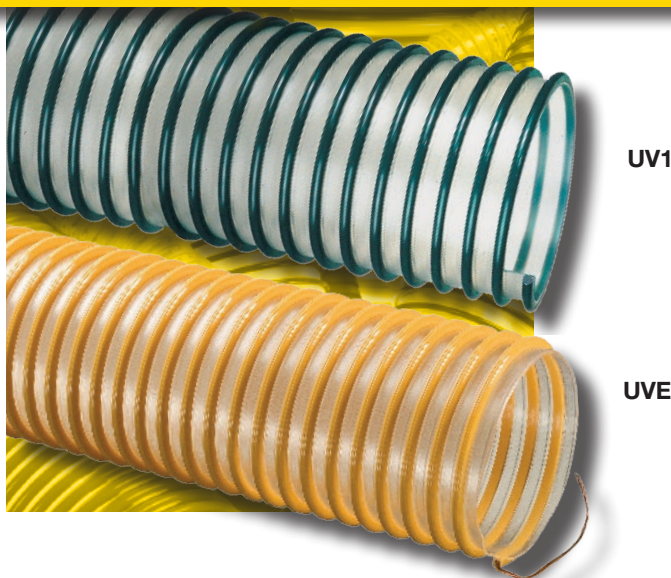

UV1

UVE



# Urevac™

## UV1™ Series

Polyurethane Ducting/  
Material Handling Hose

## UVE™ Series

Polyurethane Ducting/  
Material Handling Hose With  
Grounding Wire

### General Applications:

- Concrete resurfacing dust collection
- Ducting, ventilation and fume removal
- Dust collection
- Insulation blowing
- Material chutes
- Material handling – standard duty

**Construction:** Ester polyurethane (TPU) tube with rigid PVC helix.

### Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)\*

### Features and Advantages:

- **Durable Lightweight Polyurethane Tube** – Designed for dry applications where abrasion is a factor. Provides longer hose life and lower operating costs versus rubber or PVC hoses.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Oil Resistant Polyurethane Tube** – Resists most animal and petroleum based oils.
- **Grounding Wire (UVE only)** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It’s embedded within the rigid helix to prevent contamination of transferred materials. ⚡
- **Phthalate Free**

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)		Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F		UV1	UVE	
UV1-150	1 1/2	38.1	1.82	46.2	20	7	22	14	0.75	50		0.23
UV1/UVE-200	2	50.8	2.39	60.7	15	6	21	12	1.5		100/50	0.32
UV1-250	2 1/2	63.5	2.89	73.4	10	5	19	10	1.5	50		0.39
UV1/UVE-300	3	76.2	3.46	87.9	10	5	18	10	2.5		100/50	0.58
UV1/UVE-400	4	101.6	4.50	114.3	8	4	13	8	3		100/50	0.77
UV1-500	5	127.0	5.50	139.7	7	3	10	7	4	50		0.89
UV1/UVE-600	6	152.4	6.54	166.1	6	3	7	5	5		100/50	1.15
UV1/UVE-800	8	203.2	8.59	218.2	4	2	5	3	7	50	50	1.75

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

⚡ **CAUTION:** This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

