

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

CHROME PLATED COMMERCIAL SILLCOCKS

Model T-545/545VB

Working Pressure, Non Shock (PSI)


Cold working pressure (CWP): 125 CWP

Saturated steam (WSP): N/A

**Pictured
Model T-
545/545VB**



**Pictured
Model T-
545/545VB
Cut-away**

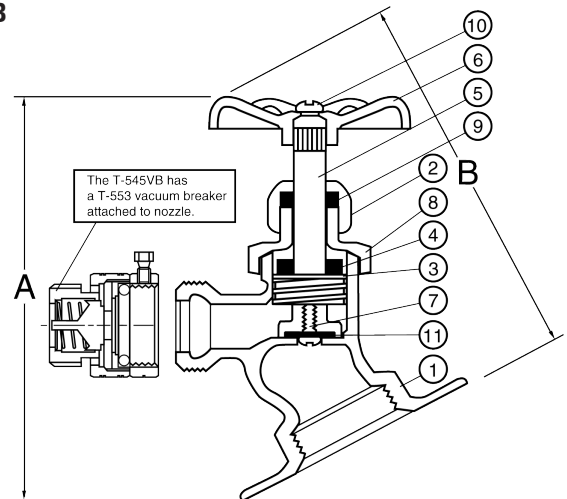

MATERIAL SPECIFICATION

PART	MATERIAL	SPECIFICATION
1 Body	Chrome plated cast brass	ASTM B584 C85710
2 Packing nut	Brass rod	ASTM B124 C3700
3 Disc	S.S	304/306
4 Washer	EPDM	SE-719F
5 Stem	Forged brass	ASTM B124 C37700
6 Handle	Zinc	Z 30A 99, 90-99, 95%
7 Seat screw	Brass	JIS H3260, C2600W
8 Bonnet	Chrome plated brass	B124 C37700
9 Stem packing	Asbestos free graphite	
10 Handle screw	Chrome plated zinc	JIS G3507
11 Seat disc	EPDM	SE-719F

DIMENSIONS

Size	A	B
1/2"	2.375	2.375
3/4"	2.375	2.375

SUBMITTAL SHEET

JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

LEAD-FREE CHROME PLATED COMMERCIAL SILLCOCK

T-545NL, T-545VBNL, T-546NL, & T-546VBNL

Lead-free design is suitable for all no-lead potable water installations, in full compliance of all lead-free plumbing laws.

Full-pattern body, stem and bonnet construction is more durable than competitor's reduced-material examples.

Ideal for frequent-use residential, commercial or industrial water applications.

Tamper-resistant vacuum breaker (-VB models) is not designed for continuous-pressure operation.

Models T-546NL & T-546VBNL feature a removable key and extended lock-shield bonnet for tamper-resistant applications.

Available in 1/2" or 3/4" FNPT Inlet x 3/4" GHT Outlet end connections.

- Third-party tested and certified in compliance with U.S. Federal Public Law 111-380 (National lead-free plumbing law).
- UPC / IAPMO certified to ANSI / NSF 61-G
- Vacuum breaker complies with:
ASSE 1011
UPC / IAPMO
CAN / CSA B64.2.
- End connections comply with:
ANSI / ASME B1.20.1 (FNPT)
ANSI / ASME B1.20.7 (male garden hose)
- Manufactured in an ISO accredited facility.



**Pictured
Model T-545NL**



**Pictured
Model T-546NL**

Working Pressure, Non Shock (PSI)

Cold working pressure (CWP): 125 p.s.i.

Saturated steam (WSP): Not suitable for steam applications

MATERIAL SPECIFICATION

PART	MATERIAL	SPECIFICATION
1 Handle (T-545NL & T-545VBNL)	Die-cast zinc	Commercial grade
Loosekey (T-546NL & T-546VBNL)	Chrome plated brass	ASTM B584 UNS C85700
2 Handle screw	Plated carbon steel	JIS G3507-1
3 Packing nut	Chrome plated forged brass	ASTM B124 UNS C37700
4 Stem packing	Graphite	Commercial grade
5 Bonnet / Lockshield	Chrome plated forged brass	ASTM B124 UNS C37700
6 Bonnet seal	EPDM rubber	Commercial grade
7 Seal support washer	304 Stainless steel	AISI Grade 304
8 Stem	Lead-free chrome plated brass	UNS Alloy C46400
9 Seat washer	EPDM	Commercial grade
10 Seat screw	Lead-free forged brass	JIS H3260-C2600W
11 Body	Lead-free chrome plated brass	UNS Alloy C46400
12 Vacuum breaker end adapter	Lead-free chrome plated brass	UNS Alloy C46400
13 Vacuum breaker set screw	Chrome plated forged brass	ASTM B124 UNS C37700
14 Vacuum breaker gasket	EPDM rubber	Commercial grade
15 Vacuum breaker seat	EPDM rubber	Commercial grade
16 Vacuum breaker piston	Polyacetal (Polyoxymethylene) resin	Commercial grade POM M90
17 Vacuum breaker spring	304 Stainless steel	AISI Grade 304
18 Vacuum breaker body	Lead-free chrome plated brass	UNS Alloy C46400



**Pictured
Model T-545VBNL**




**Pictured
Model T-546VBNL**

SUBMITTAL SHEET


JOB NAME	ITEM TAG
JOB LOCATION	PART NUMBER
CONTRACTOR	DATE
ENGINEER APPROVAL	DATE

LEAD-FREE CHROME PLATED COMMERCIAL SILLCOCK (CONT.)

T-545NL, T-545VBNL, T-546NL, & T-546VBNL

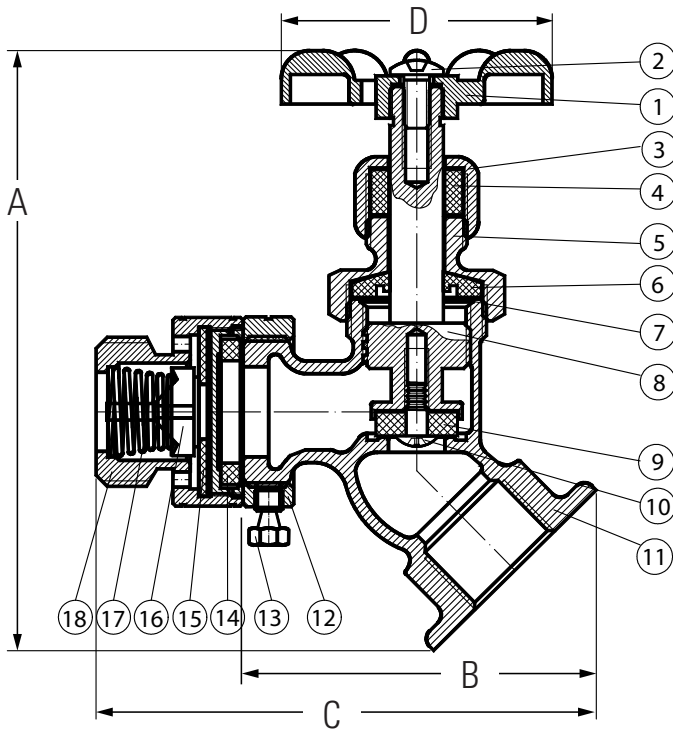

Pictured
T-545VBNL
Cut-away

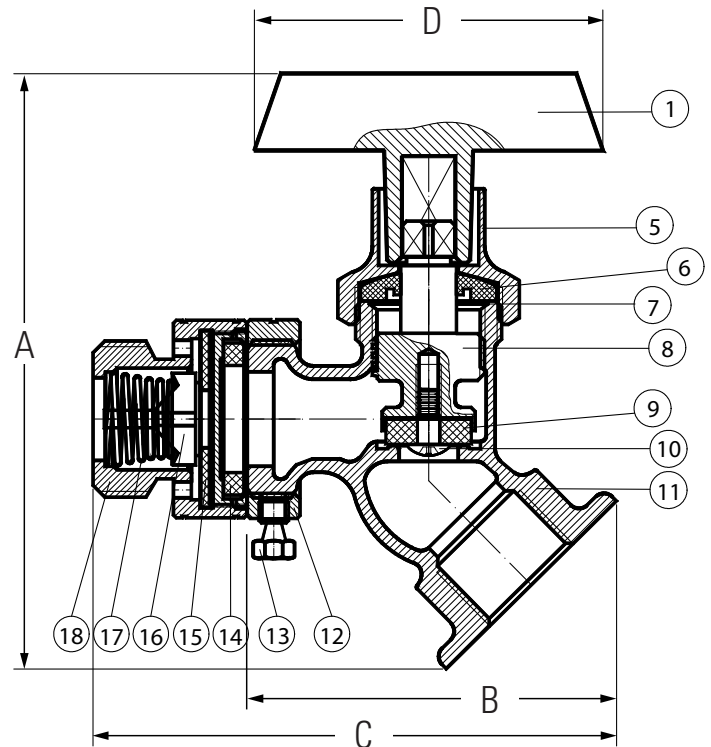

Pictured
T-546VBNL
Cut-away

DIMENSIONS

Model / Size	A	B	C	D
T-545NL				
1/2" FNPT x 3/4" MGHT	4.19	2.67	-	1.89
3/4" FNPT x 3/4" MGHT	4.37	2.86	-	1.89
T-546NL				
1/2" FNPT x 3/4" MGHT	3.97	2.67	-	2.32
3/4" FNPT x 3/4" MGHT	4.15	2.86	-	2.32
T-545VBNL				
1/2" FNPT x 3/4" MGHT	4.19	2.67	3.49	1.89
3/4" FNPT x 3/4" MGHT	4.37	2.86	3.68	1.89
T-546VBNL				
1/2" FNPT x 3/4" MGHT	3.97	2.67	3.49	2.32
3/4" FNPT x 3/4" MGHT	4.15	2.86	3.68	2.32