



REMOVABLE CAP
TO TIGHTEN SCREW
(REPLACE WHEN COMPLETE)


REMOVABLE CAP
FOR DUAL ENTRY
(INSERT IN OTHER SIDE)

IPLDH750-5 SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
IPLDH750-3	3	4.95
IPLDH750-4	4	6.38
IPLDH750-5	5	7.80
IPLDH750-6	6	9.23
IPLDH750-8	8	12.08
IPLDH750-10	10	14.93
IPLDH750-12	12	17.78
IPLDH750-14	14	20.63
IPLDH750-16	16	23.48




WIRE ENTRY POINT
WIRE RANGE: 750 KCMIL - 1/0 AWG
PRE-FILLED W/ OXIDE INHIBITOR

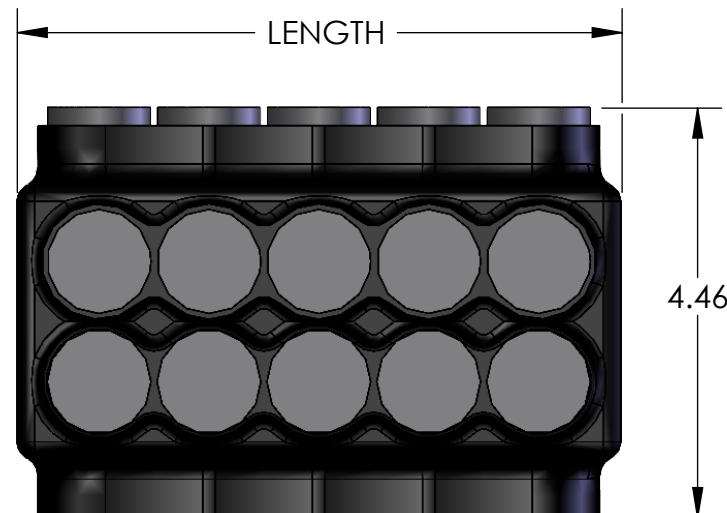

LENGTH

4.46

5/16 INTERNAL HEX PRESSURE SCREW

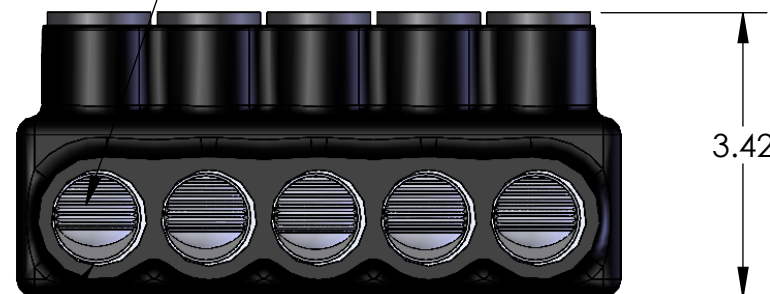

3.42

CONTACT NSI FOR SALES @ 800.321.5847



POLARIS
SALES . CO . INC

PROPRIETARY AND CONFIDENTIAL

11625 PROSPEROUS DRIVE ODESSA, FL 33556

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
POLARIS SALES CO. INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
POLARIS SALES CO. INC. IS PROHIBITED.

TITLE:

INSULATED DUAL ENTRY
750 HD CONNECTOR

NAME DATE
DRAWN BY L. HILL 10/24/2011

DWG. NO.

IPLDH750-

MATERIAL: N/A

SCALE: 1:2

SHEET: 1 OF 1

NOTES:

1. CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
2. UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
3. DUAL RATED FOR 90 °C COPPER AND/OR ALUMINUM CONDUCTOR.
4. COLD TEMPERATURE RATED TO -45 °C.
5. HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION, CHEMICAL AND UV RESISTANT.