

- FEATURES:**
- 1. CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
 - 2. UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
 - 3. DUAL RATED FOR 90 °C COPPER AND/OR ALUMINUM CONDUCTOR.
 - 4. COLD TEMPERATURE RATED TO -45 °C.
 - 5. HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION, CHEMICAL AND UV RESISTANT.

IT SERIES

PART #	FIG. #	WIRE RANGE	HEX SIZE	L	W	H
IT-4	1	4 - 14	5/32	1.12	1.37	1.38
ITO-4	2	4 - 14	5/32	1.12	1.37	1.38
IT-2	1	2 - 14	5/32	1.20	1.37	1.38
IT-1/0	1	1/0 - 14	3/16	1.62	1.83	1.69
ITO-1/0	2	1/0 - 14	3/16	1.62	1.83	1.69
IT-2/0	1	2/0 - 14	3/16	1.72	1.83	1.69
IT-3/0	1	3/0 - 6	1/4	1.84	1.90	1.79
ITO-3/0	2	3/0 - 6	1/4	1.84	1.90	1.79
IT-250	1	250 - 6	5/16	2.12	2.28	2.18
IT-350	1	350 - 6	5/16	2.47	2.41	2.61
IT-500	1	500 - 4	5/16	2.81	2.83	2.91
IT-600	1	600 - 6	5/16	3.24	2.96	3.03
IT-750*	1	750 - 1/0	3/8	3.48	3.41	3.42
ITH-750	3	750 - 1/0	5/16	3.48	4.46	3.42

*IT-750 - UL LISTED FOR 75 °C

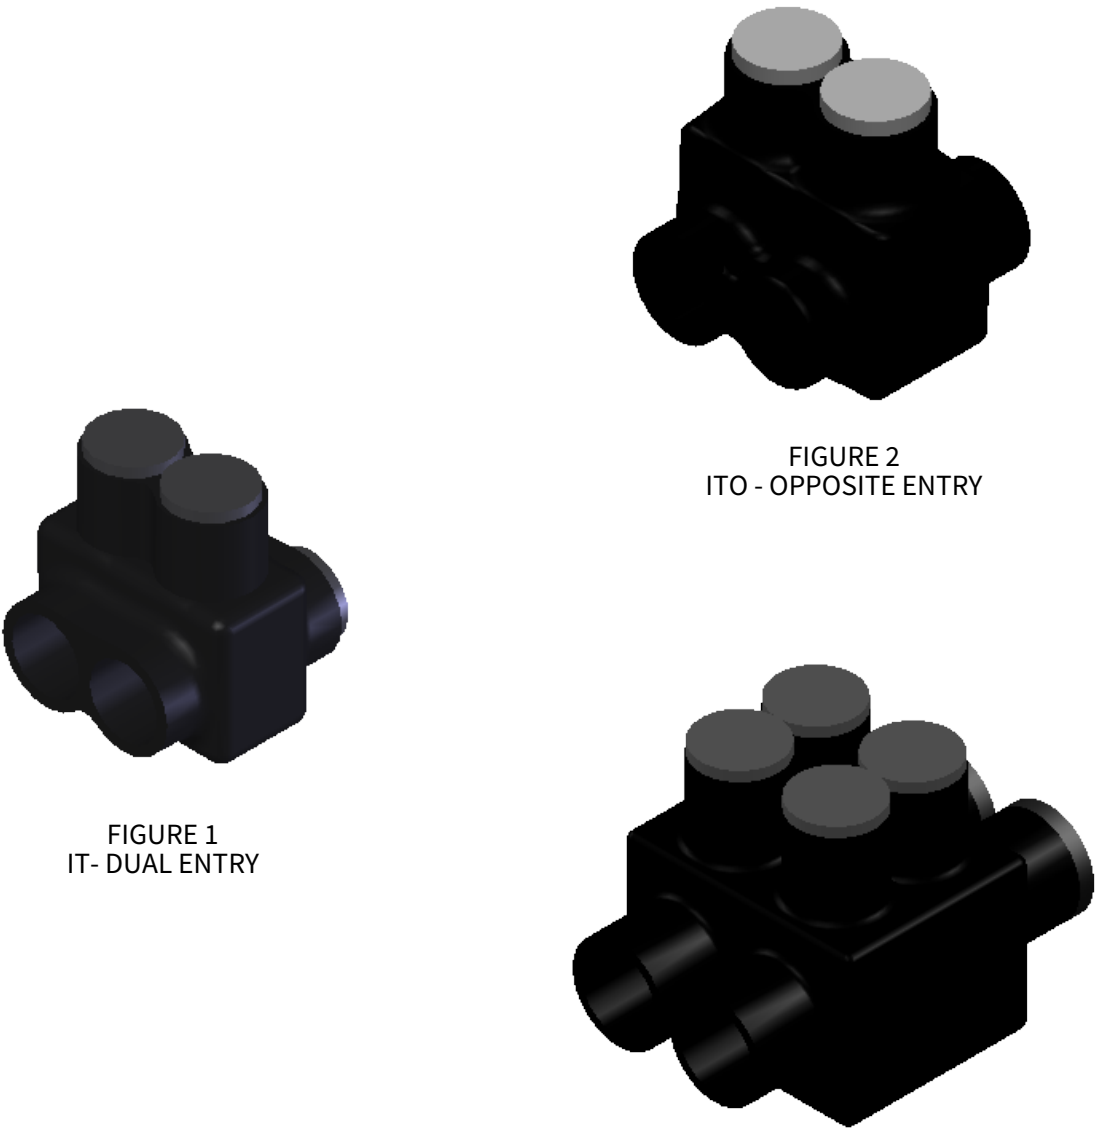


FIGURE 1
IT- DUAL ENTRY

FIGURE 2
ITO - OPPOSITE ENTRY

FIGURE 3
ITH - DOUBLE SET SCREW