DUAL HIGH CAPACITY HOSE REELS DP SERIES

COXREELS® DP Series "Dual Product Delivery" spring driven hose reels have two swivel inlets and two outlets for dual hose applications. Like the SP Series they are built to handle large hose diameters used in applications demanding large volume delivery in low and medium pressures. The sturdy box-style frame has heavy duty steel cross supports to all four corners for extra strength and rigidity.



DP SERIES

Do not exceed listed hose O.D. to obtain maximum length.

HOSE							LESS HOSE		
MODEL	I.D.	O.D.	FT.	PSI	INLET/ OUTLET N.P.T.	APRX. LBS.	MODEL	APRX. LBS.	SIZE INDEX
LOW PRESSURE	Two swivel joint inlets and two outlet risers to handle equal lengths of two hoses. Hoses can be different diameters, For applications 300 PSI and temperatures to 250° F.								
Please consult factory for reels with hose	3/8"	3/4"	50	300	1/2"	-	**DLPL-350**	94	**1**
	3/8"	3/4"	75	300	1/2"	-	**DLPL-375**	115	**1**
	3/8"	3/4"	100	300	1/2"	-	**DLPL-3100**	117	**2**
	1/2"	7/8"	50	300	1/2"	-	**DLPL-450**	97	**1**
	1/2"	7/8"	75	300	1/2"	-	**DLPL-475**	104	**2**
	1/2"	7/8"	100	300	1/2"	-	**DLPL-4100**	138	**3**
	3/4"	1 1/4"	25	300	3/4"	-	**DLPL-525**	93	**4**
	3/4"	1 1/4"	50	300	3/4"	-	**DLPL-550**	100	**5**
MEDIUM PRESSURE	Two swivel joint inlets and two outlet risers to handle equal lengths of two hoses. Hoses can be different diameters. For applications 3,000 PSI and temperatures to 250° F. For higher temperatures and pressures consult factory.								
Please consult factory for reels with hose	3/8"	13/16"	50	3,000	1/2"	-	**DMPL-350**	99	**1**
	3/8"	13/16"	75	3,000	1/2"	-	**DMPL-375**	128	**1**
	3/8"	13/16"	100	3,000	1/2"	-	**DMPL-3100**	120	**2**
	1/2"	15/16"	50	3,000	1/2"	-	**DMPL-450**	102	**1**
	1/2"	15/16"	75	3,000	1/2"	-	**DMPL-475**	115	**2**
	1/2"	15/16"	100	3,000	1/2"	-	**DMPL-4100**	138	**3**

REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	Ø	Dw
1	21 1/2"	20 1/2"	22 7/8"	15 3/8"	21 1/2"	10 1/2"	7 1/2"
2	21 1/2"	24 1/2"	26 3/8"	15 3/8"	25"	10 1/2"	7 1/2"
3	21 1/2"	28 1/2"	30 3/8"	15 3/8"	29"	10 1/2"	7 1/2"
4	23 7/8"	20 1/2"	22 7/8"	15 3/8"	21 1/2"	10 1/2"	7 1/2"
5	23 7/8"	24 1/2"	26 3/8"	15 3/8"	25"	10 1/2"	7 1/2"
	Overall Dimensions			Base		Drum	

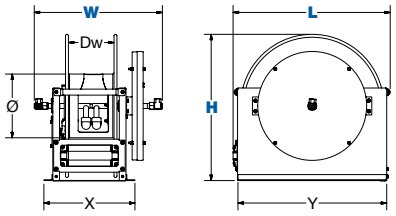

COXREELS® ACCESSORY



Top Rewind 4-Way Roller Bracket for SP & DP Series

FOR CEILING, WALL OR FLOOR MOUNT APPLICATIONS

4-way enclosed pinch-proof stainless steel rollers are 1" in diameter supported by powder coated steel brackets. Specify ceiling mount & specify drum width. Weight: 10 lbs.

For 3/8" - 3/4" - **20458 & 8100** For 1" - 1 1/2" - **20458 & 8101**

DP SERIES :: REEL SPECIFICATIONS

SWIVEL

- Two external fluid paths with machined from solid brass 90° full-flow NPT swivel inlets
- Swivel Seals: NITRILE

DESIGN & STRUCTURE

- Sturdy box-style frame design with two inlets & two outlets to handle dual hose applications
- Low profile outlet riser & open drum slot design for even hose wrap
- Reel adjusts to wall, floor, vehicle & overhead positions with optional roller bracket
- Heavy gauge 1/4" steel base for maximum strength
- Reinforced steel frame provides maximum strength & stability
- Long lasting self-lubricated flange bearings for smooth rotation
- Heavy duty 1" stainless steel pinch-proof rollers

RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel pawl spring
- Cast iron lock ring with non-sparking bronze pawl
- Multi-position lock ratchet mechanism secures hose at desired length

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Hydraulics
- Hydrant Dispenser
- Twin Agent Applications
- Chemical Fluid Transfer

ACCESSORIZE YOUR REEL :: PG 52

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories

SPRING DRIVEN