- Proportional oil delivery over a wide range of air flows
- Precision needle valve assures repeatable oil delivery and provides simple adjustment of delivery rate
- Ideal for low and high flow applications with changing air flow
- Transparent sight dome for 360° visibility



Material specifications

Body		Zinc
Bowls	Transparent	Polycarbonate
	Metal	Zinc
Drains		Plastic
Seals		Nitrile
Sight Dome		Polycarbonate

Operating information

Pressure ratings –	
Polycarbonate bowl	0 to 150 PSIG (0 to 10.3 bar)
Metal bowl	0 to 250 PSIG (0 to 17.2 bar)
Temperature rating –	
Polycarbonate bowl	32°F to 125°F (0°C to 52°C)
Metal bowl	32°F to 175°F (0°C to 80°C)
Minimum flow for lubrication:	0.5 SCFM at 100 PSIG


For technical information see CD

04L Miniature Lubricators



Port size	Bowl type	Drain type	Flow SCFM	Part number (NPT)
1/8"	Poly	None	20	**04L00GB**
1/8"	Metal without sight gauge	Twist	20	**04L03GB**
1/4"	Poly	None	20	**04L10GB**
1/4"	Metal without sight gauge	Twist	20	**04L13GB**

* Engineering level will be added at factory.

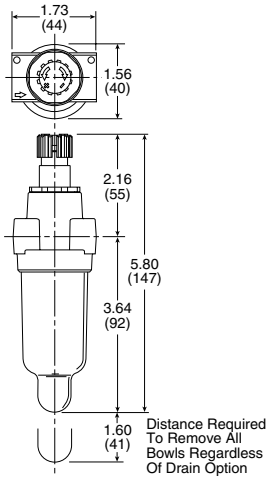

Service kits

			04L (Mini)
Bowl kits	Poly bowl	No drain	**PS421P**
		Twist drain	**PS420P**
	Metal bowl	Twist drain	**PS447BP**
Mounting bracket kit			**PS4197**
Oil		1 Quart	**F442001**
		12 Quart case	**F442003**
		4 Gallon case	**F442005**

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics