

Pro

ProConnect-PS 6000/mw



FEATURES

- Unique pin and sleeve design prevents accidental mating of non-marine rated devices.
- Available mating plug with integral threaded ring maintains a watertight seal.
- Neoprene gaskets resist petroleum.
- Reverse service feed available.
- Extended box and cover provides additional wiring capacity.
- Cast marine brass construction.
- Captive threaded receptacle cap.
- Heavy duty mounting pads.
- Silicone lubricant provided for cover screws and flange.
- Available in 125v AC up to 600v AC.
- 2P3W or 3P4W units available.

APPLICATIONS

- Marine and watertight requirements

APPROVALS

- Conforms to IP66
- ABS

TECHNICAL SPECIFICATIONS

BOX/COVER/CAP

Cast marine brass.

PLUG BODY/RING

Cast marine brass.

HARDWARE

Stainless steel.

GASKETS

One piece neoprene.

RECEPTACLE/PLUG INTERIOR

Acrylonitrile Butadiene Styrene/Polycarbonate blend (ABS+PC).

PIN AND SLEEVES

Free machining brass.

ENTRIES

Standard units undrilled. Up to four 1" NPT outlets available. See ENTRY OPTIONS for selections.

MOUNTING

Surface, via two 1/4" mounting bolts (not included).

VOLTAGE AND CURRENT

RECEPTACLE

125v AC, 30 Amp max
250v AC, 30 Amp max
277v AC, 30 Amp max
380v AC, 30 Amp max
480v AC, 30 Amp max
600v AC, 30 Amp max

ORDERING REFERENCES

PART NUMBER		DESCRIPTION	WEIGHT LBS
TYPE 2P3W	TYPE 3P4W		
6009B-125	6006B-125	Angle Type	7.8
6009BP-125	6006BP-125	Plug	2.8

SPECIAL OPTIONS

-250*	- 250v units
-277*	- 277v units
-380*	- 380v units
-480*	- 480v units
-600*	- 600v units
RS	- Reverse Service

*Replace -125 in part number.

ENTRY OPTIONS


NPT Trade Size	Dead End*	Thru Feed*	X-Positions
1/2"	E1	C1	X1
3/4"	E2	C2	X2
1"	E3	C3	X3

*Entries on short side of casting.

SPARE PARTS

Part No.	Description		
INX8014B	RECEPTACLE CAP W/GASKET	INX3057	INTERIOR, 3P4W Receptacle
GKT4005	BOX COVER GASKET	INX3073	INTERIOR, 2P3W Plug
INX3043	INTERIOR, 2P3W Receptacle	INX3074	INTERIOR, 3P4W Plug

DIMENSIONS

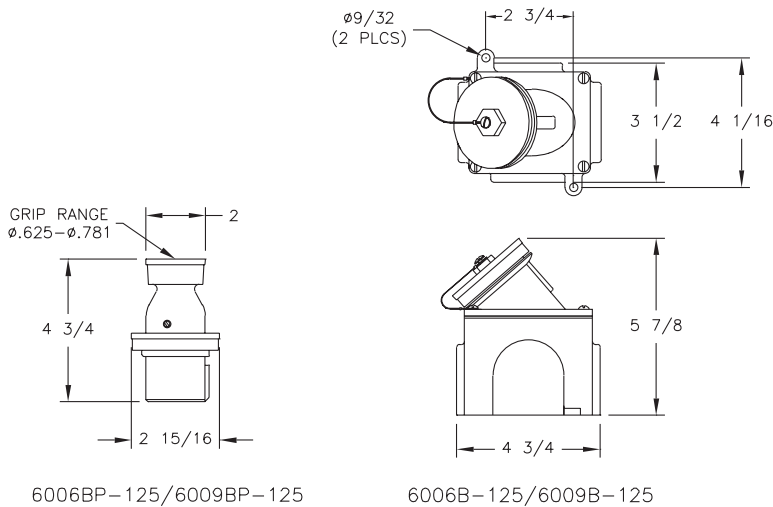

Dimensions in inches