Pushbutton Replacement Kit CF Series

Installation & Maintenance Information

IF 977

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

Shaft/Pushbutton Assembly (CF705-KI and CF859-KI)

Place pushbutton on flat, hard surface, then insert shaft into pushbutton cavity.

Align shaft with pushbutton then firmly strike the end of the shaft with a hammer to seat shaft into pushbutton.

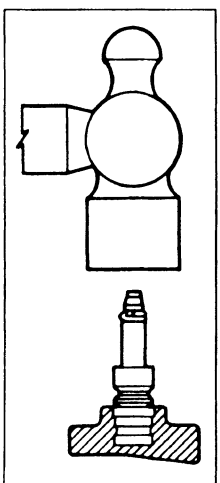

(CF859-Ki illustrated)

The shaft is properly seated when the shoulder of the pushbutton aligns with the flange of the shaft insert stub.



All statements, technical information and recommendations contained herein are based on information and tests we believe to be reliable. The accuracy or completeness thereof are not guaranteed. In accordance with Crouse-Hinds "Terms and Conditions of Sale", and since conditions of use are outside our control, the purchaser should determine the suitability of the product for his intended use and assumes all risk and liability whatsoever in connection therewith.

COOPER
Crouse-Hinds
Quality from Cooper Industries

Cooper Industries Inc., Crouse-Hinds Division
PO Box 4999
Syracuse, New York 13221 • U.S.A.
Copyright© 1997, Cooper Industries, Inc.

IF 977
New 8/83