
The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number SUCAP204-IP69K/F, Corrosion-Resistant Pillow Block Mounted Bearings - Set Screw Locking



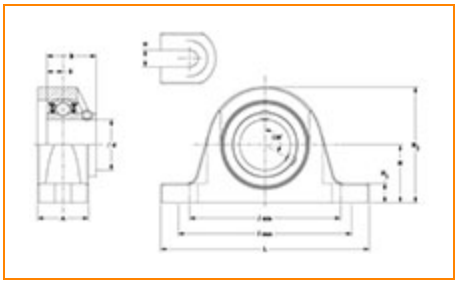

Specifications | Dimensions | Basic Load Ratings

Specifications

Bore Size	20 mm
Seal Type	IP69K Seal
Housing Material	Machined Stainless Steel
Bearing Number	SUC204-IP69K/F
Lubrication Type	Standard Food Safe Grease
Locking Style	Set Screw Locking
Housing Construction	Two-Bolt Pillow Block


Dimensions

Housing Width A	1.130 in 28.7 mm
Total Length L	5.252 in 133.4 mm
Total Height H2	2.560 in 65.0 mm
Bolt Hole Spacing J min	3.252 in 82.6 mm
Bolt Hole Spacing J max	4.375 in 111.3 mm
Base to Center Height H	1.313 in 33.3 mm
Foot Height H1	0.500 in 12.7 mm
Bolt Hole Size N	0.406 in 10.3 mm
Center of Bearing from End S	0.500 in 12.7 mm
Inner Ring Width B	1.220 in 31.0 mm

Basic Load Ratings

Dynamic Load Rating[1]	2451 lbf 10900 N
Static Load Rating	1203 lbf 5350 N

[1] Based on 90 x 10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

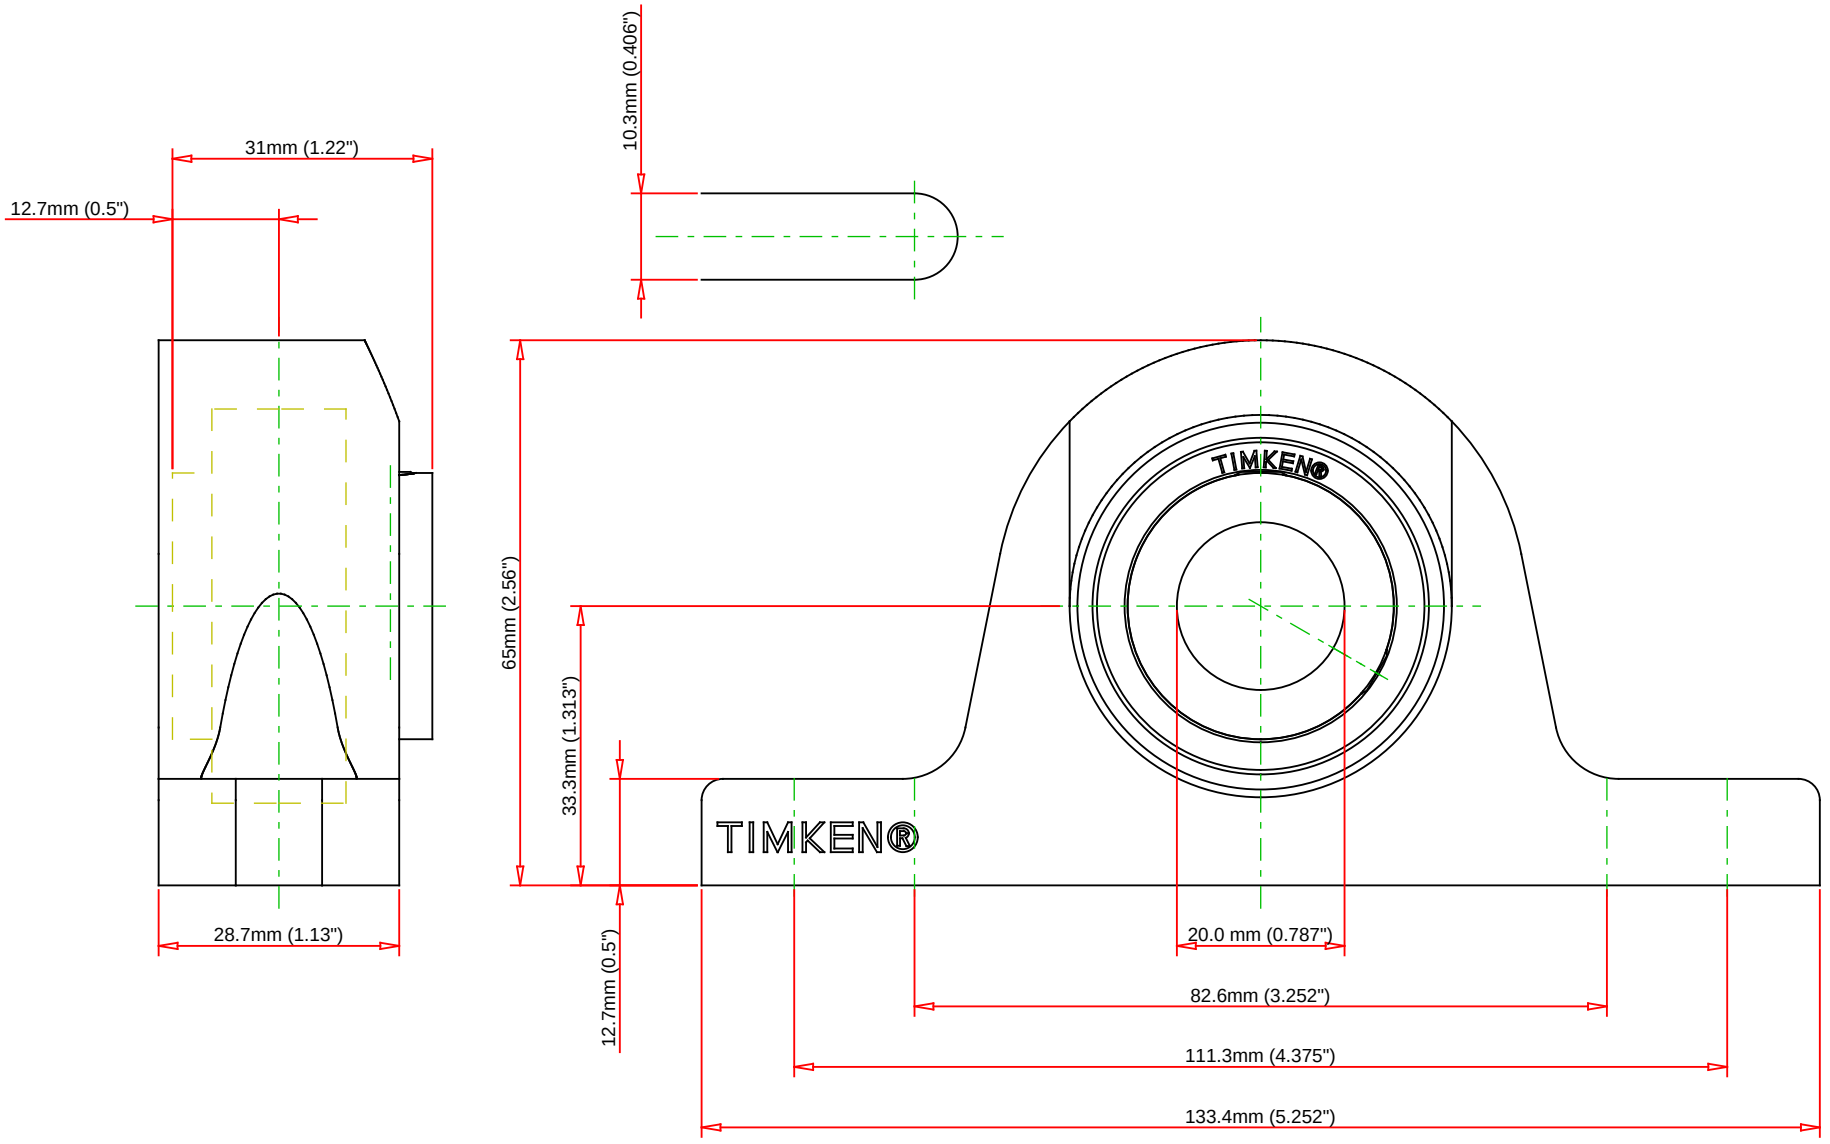

Bearing Number	SUC204-IP69K/F				
Load Ratings - C_r	2451	lbf	10900	N	
Load Ratings - C_{0r}	1203	lbf	5350	N	
Lubrication Type	Standard Food Safe Grease				
Housing Material	Machined Stainless Steel				

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

SUCAP204-IP69K/F

Corrosion-Resistant Pillow Block Mounted Bearings - Set Screw Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY