
The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number SUCSFQK209-27-IP69K/F, Corrosion-Resistant QuiKlean® Four-Bolt Flanged Mounted Bearings - Set Screw Locking



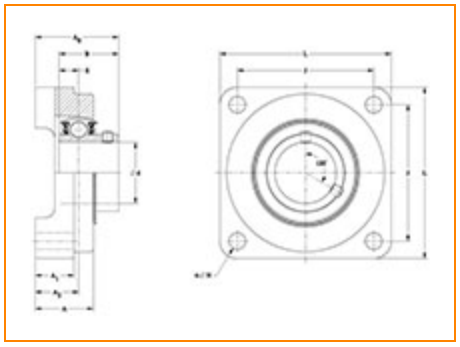

Specifications | Dimensions | Basic Load Ratings

Specifications

Bore Size	1 11/16 in
Seal Type	IP69K Seal
Housing Material	Cast Stainless Steel
Lubrication Type	Standard Food Safe Grease
Bearing Number	SUC209-27-IP69K/F
Locking Style	Set Screw Locking
Housing Construction	Four-Bolt Square Flange


Dimensions


Total Length L	5.250 in 133.4 mm
Total Height L	5.250 in 133.4 mm
Total Width A0	2.548 in 64.7 mm
Bolt Hole Spacing J	4.125 in 104.9 mm
Housing Width A	2.000 in 50.8 mm
Bolt Hole Size N	0.531 in 13.5 mm
Center of Bearing from Housing End A2	1.359 in 34.5 mm
Center of Bearing from Bearing End S	0.748 in 19.0 mm
Inner Ring Width B	1.937 in 49.2 mm

Basic Load Ratings

Dynamic Load Rating[1]	6250 lbf 27800 N
Static Load Rating	3642 lbf 16200 N

[1] Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

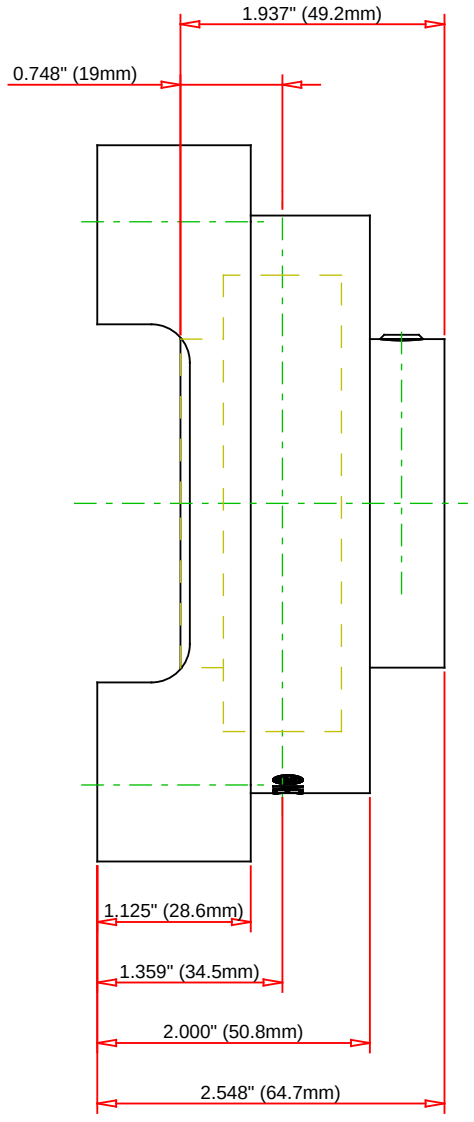

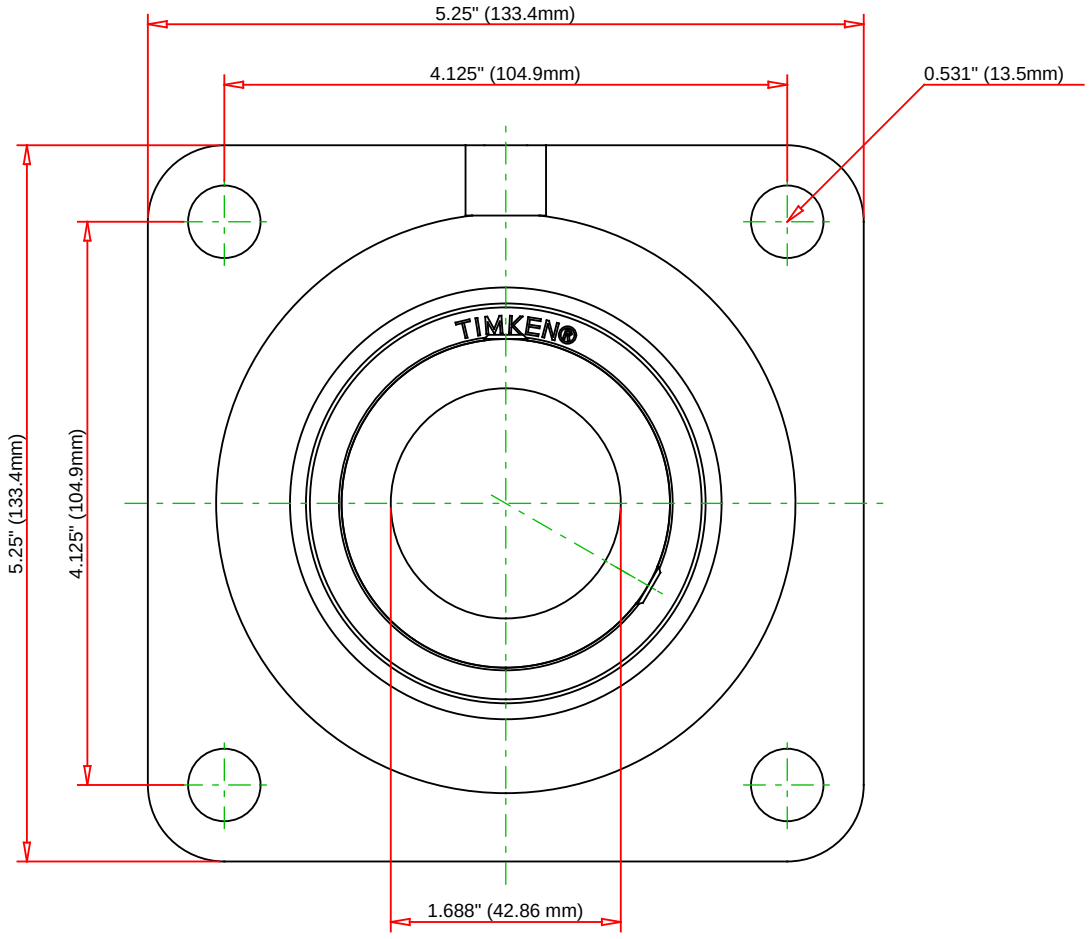

Bearing Number	SUC209-27-IP69K/F				
Load Ratings - C_r	6250	lbf	27800	N	
Load Ratings - C_{0r}	3642	lbf	16200	N	
Lubrication Type	Standard Food Safe Grease				
Housing Material	Cast Stainless Steel				

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

SUCSFQK209-27-IP69K/F

Corrosion-Resistant QuiKlean® Four-Bolt Flanged Mounted Bearings - Set Screw Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY