


Gangable Box Kits with Metallic Covers for New Concrete

Economical and convenient way to add receptacles in a new concrete pour in commercial installations. Cover/Frame kits fit FLBC8500 and FLBC8502 (page P-13).

FEATURES AND BENEFITS

- Build the box you need; use the single gang box 'as shipped' or lock them together to build a two- or three-gang box, then pick the cover kit that fits.
- The gasketed brass or nickel-plated brass frame mounts to the box with supplied screws; metal covers with gaskets then attach to the frame.
- No water intrusion; devices are protected when not in use.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D
FLBC8500	22950	NM gangable single-gang box kit/mud cover, (2) 3/4" conduit bushings, (2) blank plugs—can be used as 1-1/4" hubs	1	5	7.522	4.802	6.000	-
COVER ONLY KITS, SINGLE-GANG, FLIP LID								
FLBC8501MB	22951	Brass	1	10	4.260	3.260	.312	-
FLBC8501NL	22952	Nickel-plated	1	10	4.260	3.260	.312	-
COVER AND FRAME KITS								
SINGLE-GANG								
FLBC8510MB	22953	Brass	1	1	6.094	5.006	.750	.185
FLBC8510NL	22954	Nickel-plated	1	1	6.094	5.006	.750	.185
TWO-GANG								
FLBC8520MB	22955	Brass	1	1	6.094	9.288	.750	.185
FLBC8520NL	22956	Nickel-plated	1	1	6.094	9.288	.750	.185
THREE-GANG								
FLBC8530MB	22957	Brass	1	1	6.094	13.546	.750	.185
FLBC8530NL	22958	Nickel-plated	1	1	6.094	13.546	.750	.185

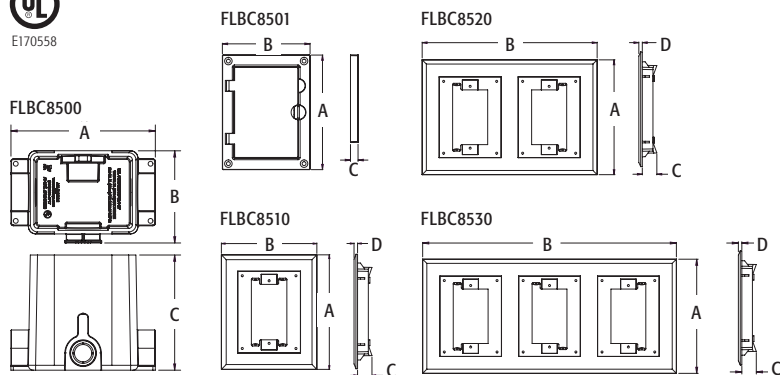

FLBC8500




FLBC8501MB
(cover only kit, no frame included)




FLBC8510NL

PATENTED.

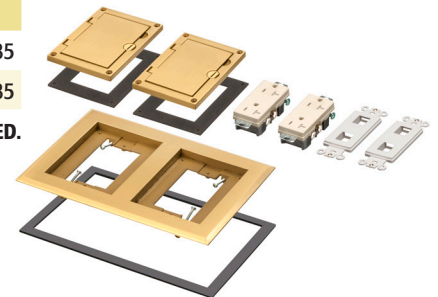

FLBC8520MB

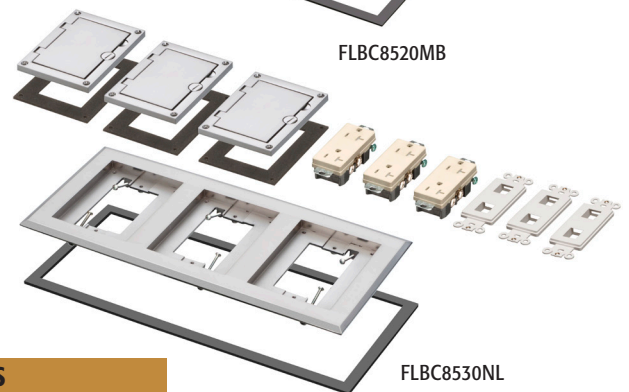

FLBC8530NL


COVER KITS INCLUDE...

single-gang gasketed flip lid cover, (1) 20A decorator-style receptacle, (1) low voltage insert

FRAME KITS INCLUDE...

1,2, or 3-gang frame, flip lid covers with gaskets, 20A decorator-style receptacles, gaskets, low voltage inserts, installation screws


INSTALLATION INSTRUCTIONS



After building desired box, attach cover frame to boxes with the screws provided.




Install desired devices (screws provided).



Install cover insert gaskets in both gangs, then add the covers.

HOW IT WORKS



Connections on opposing sides allow boxes to lock securely together.