



Metric Sprockets



ISO 16B-2 and 16B-3 Hub Type B



Models Available

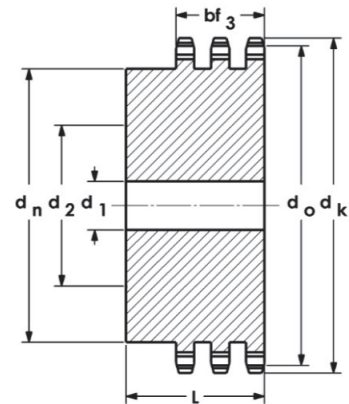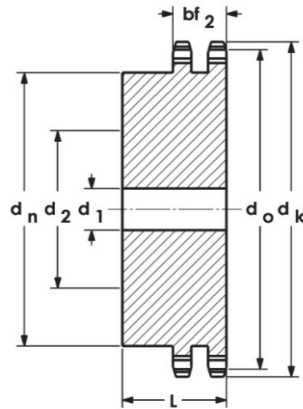

Chain Size: 16B-2 (1" x 17.02mm)
Spkt Width: 47.7mm (bf₂)

Part No.	Teeth	d _o mm	d _k mm	d _n mm	d ₁ mm	d ₂ * mm	L mm	Wt. kg
16B-2-8B	8	66.37	77.0	42	16	26	65	0.90
16B-2-9B	9	74.27	85.0	50	16	31	65	1.20
16B-2-10B	10	82.19	93.0	56	16	35	65	1.63
16B-2-11B	11	90.14	99.5	64	20	40	70	2.10
16B-2-12B	12	98.14	109.0	72	20	45	70	2.68
16B-2-13B	13	106.12	117.0	80	20	50	70	3.20
16B-2-14B	14	114.15	125.0	88	20	53	70	3.89
16B-2-15B	15	122.17	133.0	96	20	61	70	4.50
16B-2-16B	16	130.20	141.0	104	20	65	70	5.30
16B-2-17B	17	138.22	149.0	112	20	72	70	5.80
16B-2-18B	18	146.28	157.0	120	20	76	70	6.75
16B-2-19B	19	154.33	165.2	128	20	78	70	8.00
16B-2-20B	20	162.38	173.2	130	20	80	70	8.50
16B-2-21B	21	170.43	181.2	130	25	80	70	9.50
16B-2-22B	22	178.48	189.3	130	25	80	70	9.80
16B-2-23B	23	186.53	197.5	130	25	80	70	10.05
16B-2-24B	24	194.59	205.5	130	25	80	70	11.50
16B-2-25B	25	202.66	213.5	130	25	80	70	11.70
16B-2-26B	26	210.72	221.6	130	25	80	70	11.90
16B-2-27B	27	218.79	229.6	130	25	80	70	12.15
16B-2-28B	28	226.85	237.7	130	25	80	70	12.30
16B-2-29B	29	234.92	245.8	130	25	80	70	16.50
16B-2-30B	30	243.00	254.0	130	25	80	70	17.50
16B-2-31B	31	251.08	262.0	140	25	85	70	19.00
16B-2-32B	32	259.13	270.0	140	25	85	70	20.00
16B-2-33B	33	267.21	278.5	140	25	85	70	21.00
16B-2-34B	34	275.28	287.0	140	25	85	70	23.00
16B-2-35B	35	283.36	296.2	140	25	85	70	24.50
16B-2-36B	36	291.44	304.6	140	25	85	70	25.00
16B-2-37B	37	299.51	312.6	140	25	85	70	26.60
16B-2-38B	38	307.59	320.7	140	25	85	70	27.50
16B-2-39B	39	315.67	328.8	140	25	85	70	30.00
16B-2-40B	40	323.73	366.9	140	25	85	70	30.70

Chain Size: 16B-3 (1" x 17.02mm)
Spkt Width: 79.6mm (bf₃)

Part No.	Teeth	d _o mm	d _k mm	d _n mm	d ₁ mm	d ₂ * mm	L mm	Wt. kg
16B-3-8B	8	66.37	77.0	42	20	26	95	1.50
16B-3-9B	9	74.27	85.0	50	20	31	95	1.85
16B-3-10B	10	82.19	93.0	56	20	35	95	2.20
16B-3-11B	11	90.14	99.5	64	25	40	100	2.80
16B-3-12B	12	98.14	109.0	72	25	46	100	3.15
16B-3-13B	13	106.12	117.0	80	25	50	100	4.50
16B-3-14B	14	114.15	125.0	88	25	53	100	5.40
16B-3-15B	15	122.17	133.0	96	25	60	100	6.45
16B-3-16B	16	130.20	141.0	104	30	65	100	7.40
16B-3-17B	17	138.22	149.0	112	30	70	100	8.50
16B-3-18B	18	146.28	157.0	120	30	76	100	9.65
16B-3-19B	19	154.33	165.2	128	30	78	100	11.00
16B-3-20B	20	162.38	173.2	130	30	80	100	11.55
16B-3-21B	21	170.43	181.2	130	30	80	100	12.15
16B-3-22B	22	178.48	189.3	130	30	80	100	12.70
16B-3-23B	23	186.53	197.5	130	30	80	100	13.20
16B-3-24B	24	194.59	205.5	130	30	80	100	13.70
16B-3-25B	25	202.66	213.5	130	30	80	100	17.40
16B-3-26B	26	210.72	221.6	130	30	80	100	20.00
16B-3-27B	27	218.79	229.6	130	30	80	100	21.60
16B-3-28B	28	226.85	237.7	130	30	80	100	23.80
16B-3-29B	29	234.92	245.8	130	30	80	100	25.00
16B-3-30B	30	243.00	254.0	130	30	80	100	28.00
16B-3-31B	31	251.08	262.0	140	30	85	100	30.00
16B-3-32B	32	259.13	270.0	140	30	85	100	31.00
16B-3-33B	33	267.21	278.5	140	30	85	100	32.00
16B-3-34B	34	275.28	287.0	140	30	85	100	35.00
16B-3-35B	35	283.36	296.2	140	30	85	100	38.00
16B-3-36B	36	291.44	304.6	140	30	85	100	39.00
16B-3-37B	37	299.51	312.6	140	30	85	100	21.95
16B-3-38B	38	307.59	320.7	140	30	85	100	43.80
16B-3-39B	39	315.67	328.8	140	30	85	100	47.00
16B-3-40B	40	323.73	366.9	140	30	85	100	48.82