

METAL P-TRAPS W/ CLEANOUT

/// 240-04 SERIES

SPECIFICATION

Tomahawk Metal P-Traps w/ Shallow Escutcheons are intended to provide, when installed in a properly vented system, a liquid seal that prevents the back passage of gas without affecting the flow of sewage or wastewater through the system. Tomahawk Metal P-Traps w/ Shallow Escutcheons shall meet or exceed ASME standard A112.18.2.

MATERIALS

Brass

Finish: chrome or rough brass

FEATURES

- furnished with diecast or brass nuts and shallow flanges
- individually boxed


DIMENSIONS

*Tomahawk specifications in US customary units are approximate and are provided for reference only.

	-0452C	-0453C	-0454C	-04571C	-0462C
A: length	10-3/8"	10-3/8"	10-3/8"	10-3/8"	11-1/4"
B: height	5"	5"	5"	5"	5-3/8"
C: diameter	1-1/4"	1-1/4"	1-1/4"	1-1/4"	1-1/2"
D: gauge	20ga	17ga	17ga	17ga	20ga
E: J-Bend length	3"	3"	3"	3"	3-3/8"
F: waste arm length	7-1/2"	7-1/2"	7-1/2"	7-1/2"	7-1/2"
G: trap seal	2-1/2"	2-1/2"	2-1/2"	2-1/2"	3"

	-04632C	-0463C	-0464C	-0467C	-0487C
A: length	11-1/4"	11-1/4"	10-3/4"	10-3/4"	10-3/4"
B: height	5-3/8"	5-3/8"	5"	5"	5"
C: diameter	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"
D: gauge	17ga	17ga	17ga	17ga	17ga
E: J-Bend length	3-3/8"	3-3/8"	2-7/8"	2-7/8"	2-7/8"
F: waste arm length	7-1/2"	7-1/2"	7-1/2"	7-1/2"	7-1/2"
G: trap seal	3"	3"	2-1/2"	2-1/2"	2-1/2"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG

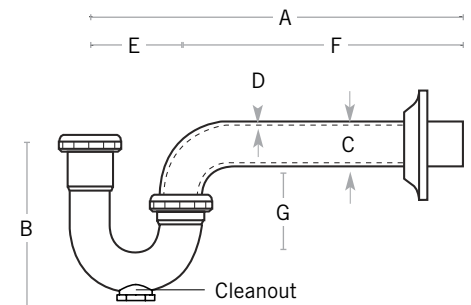

Create Item Number

240-04ABCD04

e.g. **240-04531C04:** P-trap w/ shallow escutcheon, 1-1/4", 17ga, brass nuts, chrome, 1/bx

SIZE **A**

5 = 1-1/4"

6 = 1-1/2"

8 = 1-1/2" x 1-1/4"

GUAGE **B**

2 = 20ga

3 = 17ga

NUTS **C**

_ = N/A (blank)

1 = brass nuts

2 = brass nut and ground joint

FINISH **D**

C = chrome

R1 = rough brass



*Not all combinations available. Contact your local rep to confirm availability.

