
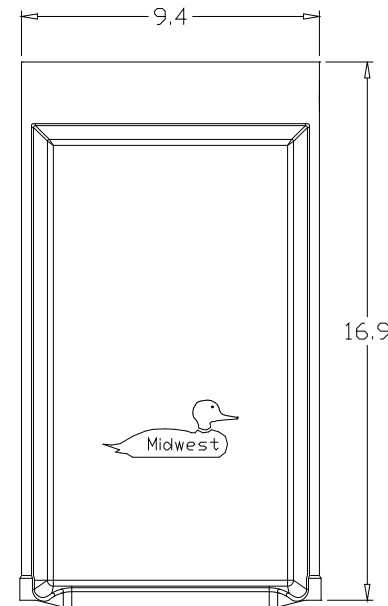
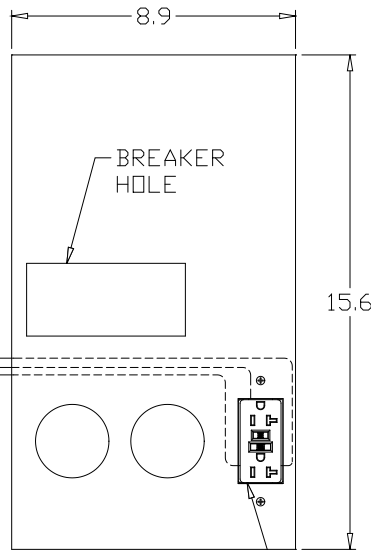
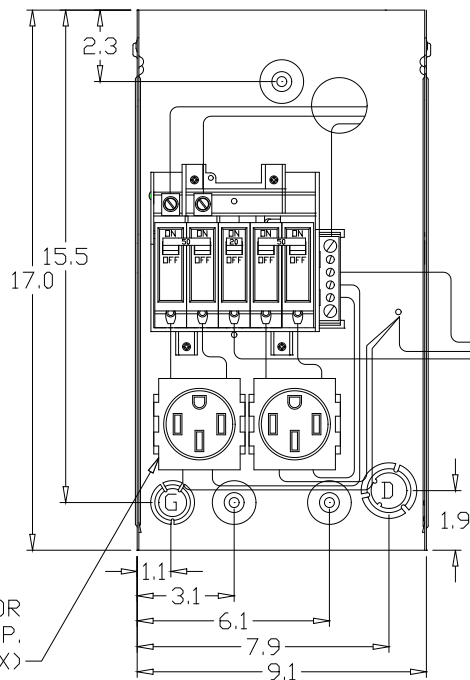
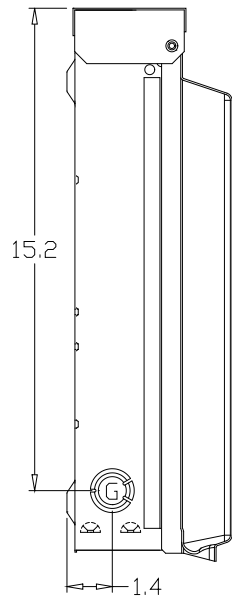
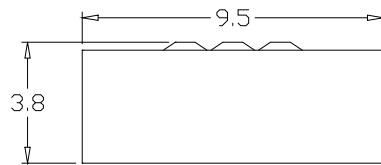


14-50R
50AMP.
RECEPTACLE (2X)

5-20R2GFI
20AMP.
GFI DUPLEX

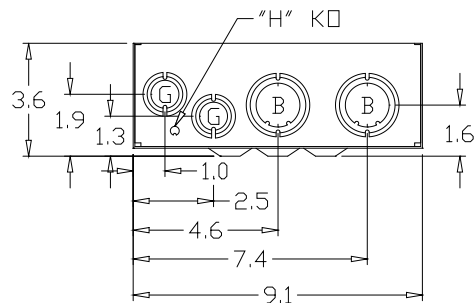

KNOCKOUT TABLE:

G= 1/2", 3/4", 1" KO
D= 3/4", 1", 1-1/4" KO
B= 1", 1-1/4", 1-1/2" KO
H= 9/32" KO

WIRE RANGE TABLE:

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-1/0	12-8	12-1/0
LOAD	14-10	14-10	---	---
NEUTRAL LARGE HOLE	12-8	12-1/0	10-8	10-1/0
NEUTRAL SMALL HOLE	14-8	14-4	12-8	12-4
EQUIP. GRND.	12-8	12-2	12-8	12-2
POST LINE CONNECTORS SUITABLE FOR LOOP FEED	#6-350 KCMIL		#6-350 KCMIL	
EQUIP. GRND.	12-2	12-2	12-2	12-2

SH37

AutoCad Generated

MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN



Unless Otherwise Specified

Tolerances On:
3 Pl. Decimals ± .010
2 Pl. Decimals ± .030
Fractions ± 1/32
Angles ± 1/2°
Holes ± .003

Dimensions Are In Inches

* = Critical To Quality

SCALE
1 : 1

SIZE
B

SHEET 1 OF 1

TITLE:

U004CB6010
HEAD OUTLINE

DWG NO:

198B8604