


The Timken Company

4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number 2MMC211WI, Fafnir® Spindle Angular Contact Ball Bearings (9300WI, 9100WI, 200WI, 300WI)

Timken® angular contact ball bearings are designed for combination radial and axial loading. Single-row bearings have high thrust capacity in one direction. Some single-row bearings are specifically designed for duplex mounting in sets for maximum performance.



[Dimensions](#) | [Basic Load Ratings](#) | [Factors](#) | [Specifications](#) | [Abutment and Fillet Dimensions](#)

Dimensions

d - Bore	55.000 mm 2.1654 in
D - Outer Diameter	100.000 mm 3.9370 in
Bearing Width	21.000 mm 0.8268 in
Contact Angle	15 °
do - Ball Diameter	14.287500 mm 0.562500 in

Basic Load Ratings

C0 - Static Radial Rating	35500 N 7980 lbf
Ce - Dynamic Radial Rating¹	58700 N 13200 lbf

Factors

Limiting Speed (Grease)	17400 rpm
Limiting Speed (Oil)	34800 rpm


Specifications

Ball Type	Ceramic
Cage Type	CR - Phenolic Outer Land Riding Cage
Bearing Weight	0.608 Kg 1.340 lb
Design Units	METRIC
Precision Class	ISO P4S (ABEC 7/9)

Abutment and Fillet Dimensions

R - Inner Ring "To Clear" Radius²	1.500 mm 0.059 in
r - Outer Ring "To Clear" Radius³	1.500 mm 0.059 in
da - Inner Ring Backing Diameter	63.300 mm 2.490 in
Da - Outer Ring Backing Diameter	92.200 mm 3.630 in

- ¹ Based on 10^6 revolutions of calculated fatigue life.
- ² Maximum housing fillet radius that bearing corners will clear.
- ³ Maximum shaft fillet radius that bearing corners will clear.

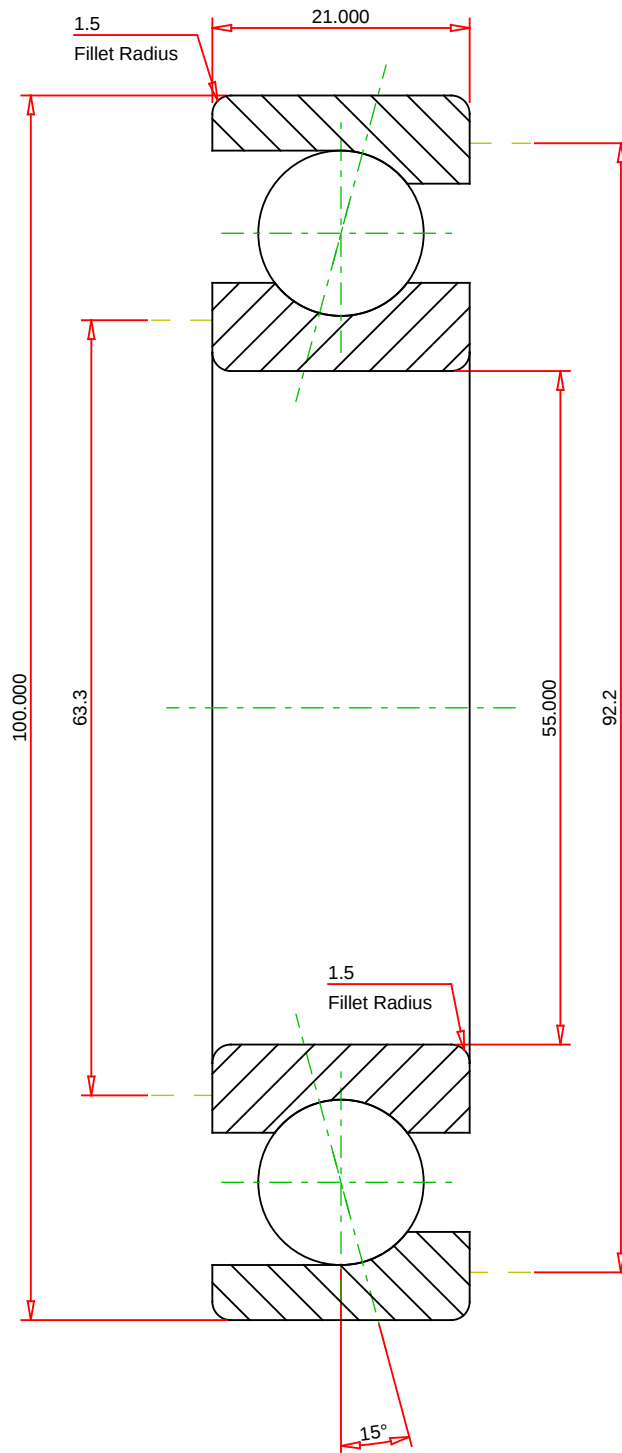

METRIC UNITS

Number of Balls Per Row Bearing Weight	14 0.608 kg	TIMKEN®		2MMC211WI Fafnir® Spindle Angular Contact Ball Bearings (9300WI, 9100WI, 200WI, 300WI)	
		THE TIMKEN COMPANY NORTH CANTON, OHIO USA		Dynamic Radial Rating58700 N Static Radial Rating35500 N	

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY