

GROOVED PINS

HUYETT.COM • 785-392-3017

BOX 232 • MINNEAPOLIS, KS • 67467

SALES@HUYETT.COM • FAX 785-392-2845

TYPE H

ASME B18.8.2

DESCRIPTION

A short pilot and three parallel half-length grooves at one end. Pilot eases installation. Smooth end is ideal for use as a stop, hinge, pivot, or key.

HOW TO IDENTIFY

1. Verify three half-length parallel grooves at one end.
2. Measure diameter (A).
3. Measure length (L).
4. Find the part in the chart below.


PREFIX MATERIAL/FINISH

Type H identified by "-H" at end of item number.

GP = LOW CARBON STEEL, ZINC CLEAR
GPA = ALLOY STEEL, PLAIN*
GPS = 300 SERIES STAINLESS STEEL, PLAIN

Material/finish combinations may not be available in all sizes.

**SEE STAINLESS STEEL AND OTHER
SPECIAL MATERIAL TOLERANCES ON
PAGE 195*

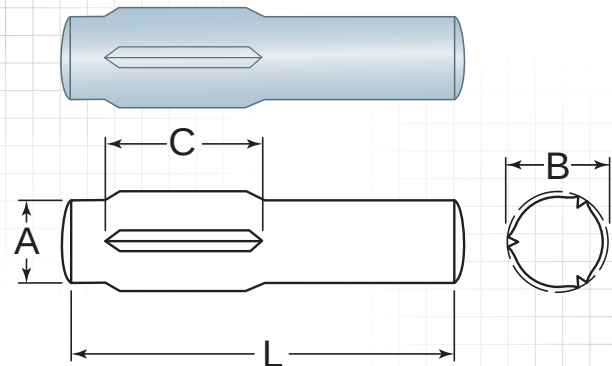

ITEM NUMBER	(A) OUTSIDE DIAMETER	(L) OVERALL LENGTH	(B)* EXPANDED DIAMETER	(C) GROOVE LENGTH
	+0.000/-0.015"	+0.010/-0.010"	+0.0015/-0.0015"	
PREFIX-0062-0250-H	.0625" (1/16)	.2500" (1/4)	.0680"	.1250" (1/8)
PREFIX-0062-0375-H	.0625" (1/16)	.3750" (3/8)	.0680"	.1875" (3/16)
PREFIX-0062-0500-H	.0625" (1/16)	.5000" (1/2)	.0680"	.2500" (1/4)
PREFIX-0062-0625-H	.0625" (1/16)	.6250" (5/8)	.0680"	.3125" (5/16)
PREFIX-0062-0750-H	.0625" (1/16)	.7500" (3/4)	.0670"	.3750" (3/8)
PREFIX-0062-0875-H	.0625" (1/16)	.8750" (7/8)	.0670"	.4375" (7/16)
PREFIX-0062-1000-H	.0625" (1/16)	1.0000" (1)	.0670"	.5000" (1/2)
	+0.000/-0.0015"	+0.010/-0.010"	+0.0015/-0.0015"	
PREFIX-0093-0250-H	.0938" (3/32)	.2500" (1/4)	.1010"	.1250" (1/8)
PREFIX-0093-0375-H	.0938" (3/32)	.3750" (3/8)	.1010"	.1875" (3/16)
PREFIX-0093-0437-H	.0938" (3/32)	.4375" (7/16)	.1010"	.2188" (7/32)
PREFIX-0093-0500-H	.0938" (3/32)	.5000" (1/2)	.1010"	.2500" (1/4)
PREFIX-0093-0625-H	.0938" (3/32)	.6250" (5/8)	.1010"	.3125" (5/16)
PREFIX-0093-0687-H	.0938" (3/32)	.6875" (11/16)	.1000"	.3437" (11/32)
PREFIX-0093-0750-H	.0938" (3/32)	.7500" (3/4)	.1000"	.3750" (3/8)
PREFIX-0093-0875-H	.0938" (3/32)	.8750" (7/8)	.1000"	.4375" (7/16)
PREFIX-0093-1000-H	.0938" (3/32)	1.0000" (1)	.1000"	.5000" (1/2)
PREFIX-0093-1250-H	.0938" (3/32)	1.2500" (1-1/4)	.1000"	.6250" (5/8)
	+0.000/-0.0020"	+0.010/-0.010"	+0.0020/-0.0020"	
PREFIX-0125-0250-H	.1250" (1/8)	.2500" (1/4)	.1340"	.1250" (1/8)
PREFIX-0125-0312-H	.1250" (1/8)	.3125" (5/16)	.1340"	.1563" (5/32)
PREFIX-0125-0375-H	.1250" (1/8)	.3750" (3/8)	.1340"	.1875" (3/16)
PREFIX-0125-0500-H	.1250" (1/8)	.5000" (1/2)	.1340"	.2500" (1/4)
PREFIX-0125-0562-H	.1250" (1/8)	.5625" (9/16)	.1340"	.2812" (9/32)
PREFIX-0125-0625-H	.1250" (1/8)	.6250" (5/8)	.1340"	.3125" (5/16)
PREFIX-0125-0750-H	.1250" (1/8)	.7500" (3/4)	.1340"	.3750" (3/8)
PREFIX-0125-0875-H	.1250" (1/8)	.8750" (7/8)	.1330"	.4375" (7/16)
PREFIX-0125-1000-H	.1250" (1/8)	1.0000" (1)	.1330"	.5000" (1/2)
PREFIX-0125-1250-H	.1250" (1/8)	1.2500" (1-1/4)	.1320"	.6250" (5/8)
PREFIX-0125-1500-H	.1250" (1/8)	1.5000" (1-1/2)	.1320"	.7500" (3/4)

FOR DETAILED SPECIFICATIONS AND TOLERANCES, VISIT HUYETT.COM.

Prices, materials, dimensions, tolerances, designs, and grades subject to change without notice. © 2015 G.L. Huyett

*Limited warranty for surface finish: 30 days from date of shipment. See page 8 for details.



GROOVED PINS

HUYETT.COM • 785-392-3017

ASME B18.8.2

TYPE H

ITEM NUMBER	(A) OUTSIDE DIAMETER	(L) OVERALL LENGTH	(B)* EXPANDED DIAMETER	(C) GROOVE LENGTH
	+ .0000/- .0020"	+ .010/- .010"	+ .0020/- .0020"	
PREFIX-0156-0375-H	.1563" (5/32)	.3750" (3/8)	.1660"	.1875" (3/16)
PREFIX-0156-0500-H	.1563" (5/32)	.5000" (1/2)	.1660"	.2500" (1/4)
PREFIX-0156-0625-H	.1563" (5/32)	.6250" (5/8)	.1660"	.3125" (5/16)
PREFIX-0156-0750-H	.1563" (5/32)	.7500" (3/4)	.1660"	.3750" (3/8)
PREFIX-0156-0875-H	.1563" (5/32)	.8750" (7/8)	.1650"	.4375" (7/16)
PREFIX-0156-1000-H	.1563" (5/32)	1.0000" (1)	.1650"	.5000" (1/2)
PREFIX-0156-1250-H	.1563" (5/32)	1.2500" (1-1/4)	.1640"	.6250" (5/8)
PREFIX-0156-1500-H	.1563" (5/32)	1.5000" (1-1/2)	.1640"	.7500" (3/4)
PREFIX-0156-1750-H	.1563" (5/32)	1.7500" (1-3/4)	.1630"	.8750" (7/8)
PREFIX-0156-2000-H	.1563" (5/32)	2.0000" (2)	.1630"	1.0000" (1)
	+ .0000/- .0020"	+ .010/- .010"	+ .0025/- .0025"	
PREFIX-0187-0375-H	.1875" (3/16)	.3750" (3/8)	.1980"	.1875" (3/16)
PREFIX-0187-0500-H	.1875" (3/16)	.5000" (1/2)	.1980"	.2500" (1/4)
PREFIX-0187-0625-H	.1875" (3/16)	.6250" (5/8)	.1980"	.3125" (5/16)
PREFIX-0187-0750-H	.1875" (3/16)	.7500" (3/4)	.1980"	.3750" (3/8)
PREFIX-0187-0875-H	.1875" (3/16)	.8750" (7/8)	.1980"	.4375" (7/16)
PREFIX-0187-1000-H	.1875" (3/16)	1.0000" (1)	.1980"	.5000" (1/2)
PREFIX-0187-1250-H	.1875" (3/16)	1.2500" (1-1/4)	.1970"	.6250" (5/8)
PREFIX-0187-1500-H	.1875" (3/16)	1.5000" (1-1/2)	.1970"	.7500" (3/4)
PREFIX-0187-1750-H	.1875" (3/16)	1.7500" (1-3/4)	.1970"	.8750" (7/8)
PREFIX-0187-2000-H	.1875" (3/16)	2.0000" (2)	.1960"	1.0000" (1)
	+ .0000/- .0020"	+ .010/- .010"	+ .0025/- .0025"	
PREFIX-0218-0500-H	.2188" (7/32)	.5000" (1/2)	.2300"	.2500" (1/4)
PREFIX-0218-0625-H	.2188" (7/32)	.6250" (5/8)	.2300"	.3125" (5/16)
PREFIX-0218-0750-H	.2188" (7/32)	.7500" (3/4)	.2300"	.3750" (3/8)
PREFIX-0218-0875-H	.2188" (7/32)	.8750" (7/8)	.2300"	.4375" (7/16)
PREFIX-0218-1000-H	.2188" (7/32)	1.0000" (1)	.2300"	.5000" (1/2)
PREFIX-0218-1250-H	.2188" (7/32)	1.2500" (1-1/4)	.2300"	.6250" (5/8)
PREFIX-0218-1500-H	.2188" (7/32)	1.5000" (1-1/2)	.2290"	.7500" (3/4)
PREFIX-0218-1750-H	.2188" (7/32)	1.7500" (1-3/4)	.2290"	.8750" (7/8)
PREFIX-0218-2000-H	.2188" (7/32)	2.0000" (2)	.2290"	1.0000" (1)
PREFIX-0218-2250-H	.2188" (7/32)	2.2500" (2-1/4)	.2290"	1.1250" (1-1/8)
	+ .0000/- .0020"	+ .010/- .010"	+ .0025/- .0025"	
PREFIX-0250-0500-H	.2500" (1/4)	.5000" (1/2)	.2630"	.2500" (1/4)
PREFIX-0250-0625-H	.2500" (1/4)	.6250" (5/8)	.2630"	.3125" (5/16)
PREFIX-0250-0750-H	.2500" (1/4)	.7500" (3/4)	.2630"	.3750" (3/8)
PREFIX-0250-0875-H	.2500" (1/4)	.8750" (7/8)	.2630"	.4375" (7/16)
PREFIX-0250-1000-H	.2500" (1/4)	1.0000" (1)	.2630"	.5000" (1/2)
PREFIX-0250-1250-H	.2500" (1/4)	1.2500" (1-1/4)	.2630"	.6250" (5/8)
PREFIX-0250-1500-H	.2500" (1/4)	1.5000" (1-1/2)	.2620"	.7500" (3/4)
PREFIX-0250-1750-H	.2500" (1/4)	1.7500" (1-3/4)	.2620"	.8750" (7/8)
PREFIX-0250-2000-H	.2500" (1/4)	2.0000" (2)	.2620"	1.0000" (1)
PREFIX-0250-2250-H	.2500" (1/4)	2.2500" (2-1/4)	.2620"	1.1250" (1-1/8)
PREFIX-0250-2500-H	.2500" (1/4)	2.5000" (2-1/2)	.2610"	1.2500" (1-1/4)
PREFIX-0250-2750-H	.2500" (1/4)	2.7500" (2-3/4)	.2610"	1.3750" (1-3/8)
	+ .0000/- .0020"	+ .010/- .010"	+ .0025/- .0025"	
PREFIX-0312-0625-H	.3125" (5/16)	.6250" (5/8)	.3290"	.3125" (5/16)
PREFIX-0312-0750-H	.3125" (5/16)	.7500" (3/4)	.3290"	.3750" (3/8)
PREFIX-0312-0875-H	.3125" (5/16)	.8750" (7/8)	.3290"	.4375" (7/16)
PREFIX-0312-1000-H	.3125" (5/16)	1.0000" (1)	.3290"	.5000" (1/2)
PREFIX-0312-1250-H	.3125" (5/16)	1.2500" (1-1/4)	.3290"	.6250" (5/8)
PREFIX-0312-1500-H	.3125" (5/16)	1.5000" (1-1/2)	.3290"	.7500" (3/4)

FOR DETAILED SPECIFICATIONS AND TOLERANCES, VISIT HUYETT.COM.

Prices, materials, dimensions, tolerances, designs, and grades subject to change without notice. © 2015 G.L. Huyett

*Limited warranty for surface finish: 30 days from date of shipment. See page 8 for details.

GROOVED PINS

HUYETT.COM • 785-392-3017

BOX 232 • MINNEAPOLIS, KS • 67467

SALES@HUYETT.COM • FAX 785-392-2845

TYPE H


ASME B18.8.2

PREFIX MATERIAL/FINISH

Type H identified by "-H" at end of item number.

GP = LOW CARBON STEEL, ZINC CLEAR
GPA = ALLOY STEEL, PLAIN*
GPS = 300 SERIES STAINLESS STEEL, PLAIN

Material/finish combinations may not be available in all sizes.

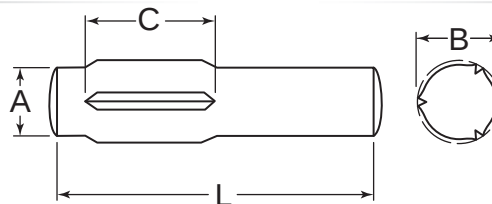

ITEM NUMBER	(A) OUTSIDE DIAMETER	(L) OVERALL LENGTH	(B)* EXPANDED DIAMETER	(C) GROOVE LENGTH
PREFIX-0312-1750-H	.3125" (5/16)	1.7500" (1-3/4)	.3280"	.8750" (7/8)
PREFIX-0312-2000-H	.3125" (5/16)	2.0000" (2)	.3280"	1.0000" (1)
PREFIX-0312-2250-H	.3125" (5/16)	2.2500" (2-1/4)	.3280"	1.1250" (1-1/8)
PREFIX-0312-2500-H	.3125" (5/16)	2.5000" (2-1/2)	.3270"	1.2500" (1-1/4)
PREFIX-0312-2750-H	.3125" (5/16)	2.7500" (2-3/4)	.3270"	1.3750" (1-3/8)
	+.0000/-0.0020"	+.010/-0.010"	+.0030/-0.0030"	
PREFIX-0375-0750-H	.3750" (3/8)	.7500" (3/4)	.3940"	.3750" (3/8)
PREFIX-0375-0875-H	.3750" (3/8)	.8750" (7/8)	.3940"	.4375" (7/16)
PREFIX-0375-1000-H	.3750" (3/8)	1.0000" (1)	.3940"	.5000" (1/2)
PREFIX-0375-1250-H	.3750" (3/8)	1.2500" (1-1/4)	.3940"	.6250" (5/8)
PREFIX-0375-1375-H	.3750" (3/8)	1.3750" (1-3/8)	.3940"	.6875" (11/16)
PREFIX-0375-1500-H	.3750" (3/8)	1.5000" (1-1/2)	.3940"	.7500" (3/4)
PREFIX-0375-1750-H	.3750" (3/8)	1.7500" (1-3/4)	.3930"	.8750" (7/8)
PREFIX-0375-2000-H	.3750" (3/8)	2.0000" (2)	.3930"	1.0000" (1)
PREFIX-0375-2250-H	.3750" (3/8)	2.2500" (2-1/4)	.3930"	1.1250" (1-1/8)
PREFIX-0375-2500-H	.3750" (3/8)	2.5000" (2-1/2)	.3930"	1.2500" (1-1/4)
PREFIX-0375-2750-H	.3750" (3/8)	2.7500" (2-3/4)	.3930"	1.3750" (1-3/8)
PREFIX-0375-3000-H	.3750" (3/8)	3.0000" (3)	.3920"	1.5000" (1-1/2)
PREFIX-0375-3250-H	.3750" (3/8)	3.2500" (3-1/4)	.3920"	1.6250" (1-5/8)
PREFIX-0375-3500-H	.3750" (3/8)	3.5000" (3-1/2)	.3910"	1.7500" (1-3/4)
	+.0000/-0.0020"	+.010/-0.010"	+.0030/-0.0030"	
PREFIX-0437-0875-H	.4375" (7/16)	.8750" (7/8)	.4590"	.4375" (7/16)
PREFIX-0437-1000-H	.4375" (7/16)	1.0000" (1)	.4590"	.5000" (1/2)
PREFIX-0437-1250-H	.4375" (7/16)	1.2500" (1-1/4)	.4590"	.6250" (5/8)
PREFIX-0437-1500-H	.4375" (7/16)	1.5000" (1-1/2)	.4590"	.7500" (3/4)
PREFIX-0437-1750-H	.4375" (7/16)	1.7500" (1-3/4)	.4590"	.8750" (7/8)
PREFIX-0437-2000-H	.4375" (7/16)	2.0000" (2)	.4580"	1.0000" (1)
PREFIX-0437-2250-H	.4375" (7/16)	2.2500" (2-1/4)	.4580"	1.1250" (1-1/8)
PREFIX-0437-2500-H	.4375" (7/16)	2.5000" (2-1/2)	.4580"	1.2500" (1-1/4)
PREFIX-0437-2750-H	.4375" (7/16)	2.7500" (2-3/4)	.4580"	1.3750" (1-3/8)
PREFIX-0437-3000-H	.4375" (7/16)	3.0000" (3)	.4570"	1.5000" (1-1/2)
PREFIX-0437-3250-H	.4375" (7/16)	3.2500" (3-1/4)	.4570"	1.6250" (1-5/8)
PREFIX-0437-3500-H	.4375" (7/16)	3.5000" (3-1/2)	.4560"	1.7500" (1-3/4)
	+.0000/-0.0020"	+.010/-0.010"	+.0030/-0.0030"	
PREFIX-0500-1000-H	.5000" (1/2)	1.0000" (1)	.5250"	.5000" (1/2)
PREFIX-0500-1250-H	.5000" (1/2)	1.2500" (1-1/4)	.5250"	.6250" (5/8)
PREFIX-0500-1500-H	.5000" (1/2)	1.5000" (1-1/2)	.5250"	.7500" (3/4)
PREFIX-0500-1750-H	.5000" (1/2)	1.7500" (1-3/4)	.5250"	.8750" (7/8)
PREFIX-0500-2000-H	.5000" (1/2)	2.0000" (2)	.5250"	1.0000" (1)
PREFIX-0500-2250-H	.5000" (1/2)	2.2500" (2-1/4)	.5240"	1.1250" (1-1/8)
PREFIX-0500-2500-H	.5000" (1/2)	2.5000" (2-1/2)	.5240"	1.2500" (1-1/4)
PREFIX-0500-2750-H	.5000" (1/2)	2.7500" (2-3/4)	.5240"	1.3750" (1-3/8)
PREFIX-0500-3000-H	.5000" (1/2)	3.0000" (3)	.5230"	1.5000" (1-1/2)
PREFIX-0500-3250-H	.5000" (1/2)	3.2500" (3-1/4)	.5230"	1.6250" (1-5/8)
PREFIX-0500-3500-H	.5000" (1/2)	3.5000" (3-1/2)	.5220"	1.7500" (1-3/4)

FOR DETAILED SPECIFICATIONS AND TOLERANCES, VISIT HUYETT.COM.

Pricing, materials, dimensions, tolerances, designs, and grades subject to change without notice. © 2015 G.L. Huyett

*Limited warranty for surface finish: 30 days from date of shipment. See page 8 for details.