




Zurn PEX® XL-Low Lead Brass Quarter Turn Angle Stop Valve – QQTV__GX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

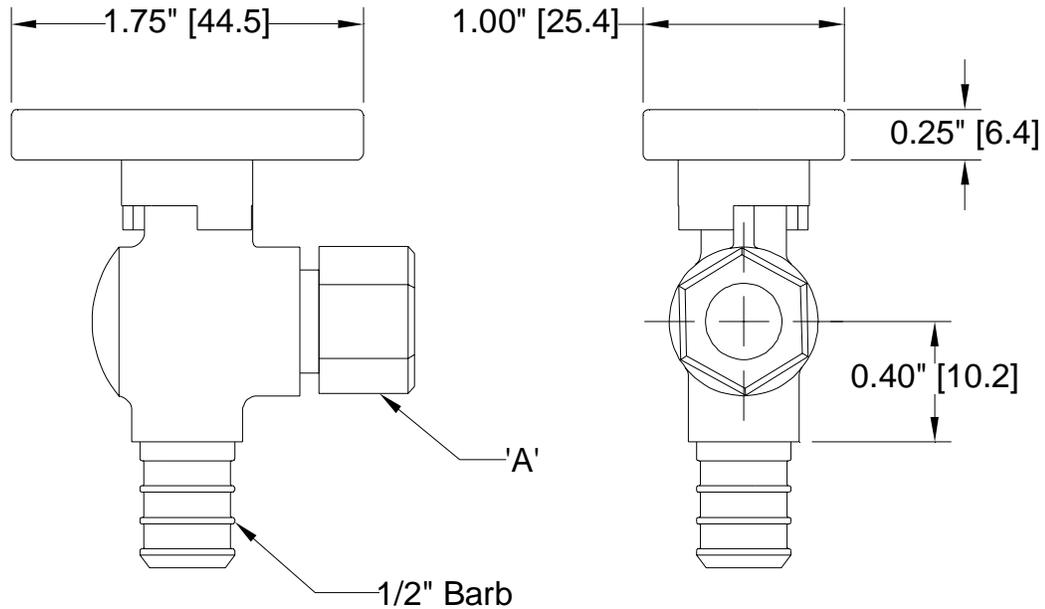

Part Number	Description	'A'
QQTV40GX	1/4 Turn Stop Valve - 1/2" Barb x 1/4" OD Comp.	1/4" OD Comp.
QQTV60GX	1/4 Turn Stop Valve - 1/2" Barb x 3/8" OD Comp.	3/8" OD Comp.

Engineering Specification: Zurn PEX® XL-Low Lead Brass Quarter-Turn Angle Stop Valve. The QQTV__GX has a 1/2" PEX barb inlet x compression outlet. Manufactured from EcoBrass®, C69300. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed as complying with the following standards: NSF/ANSI Standard 61 including Annex G, CSA B137.5, and ASTM F1807.

Accessories

- ___ **QCLP3X** 1/2" QuickClamp® Crimp Ring
- ___ **QCR3X** 1/2" Copper Crimp Ring
- ___ **QSOET3X** 1/2" Stainless Steel Crimp Ring

Rev. A	Date: 10/22/10	C.N. No. 110735
Dwg. No. 84406	Prod. No. QQTV__GX	