




QEP_P

CR POLYMER F1960 EXPANSION PEX TEST PLUG

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

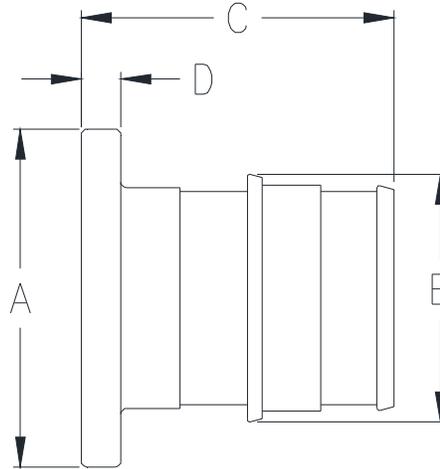

Part Number	CR F1960 Expansion PEX Test Plug size	Dimensions in In [mm]			
		A	B	C	D
QEP3P	1/2" EX PEX	0.87 [22]	0.61 [16]	0.86 [22]	0.14 [4]
QEP4P	3/4" EX PEX	1.18 [30]	0.87 [22]	1.09 [28]	0.14 [4]
QEP5P	1" EX PEX	1.50 [38]	1.11 [28]	1.39 [35]	0.20 [5]
QEP6P	1-1/4" EX PEX	1.70 [43]	1.36 [34]	1.65 [42]	0.20 [5]
QEP7P	1-1/2" EX PEX	1.81 [46]	1.49 [38]	1.91 [49]	0.20 [5]
QEP8P	2" EX PEX	2.52 [64]	2.08 [48]	2.39 [61]	0.24 [6]

Engineering Specification: Zurn PEX® CR Polymer F1960 Expansion PEX Test Plug

The QEP__P is used with Zurn Non-Barrier PEX tubing in potable water applications. Molded from PPSU, these fittings, as a system with Zurn PEX® tube and Zurn PEX reinforcing rings are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are 3rd party certified as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, NSF/ANSI Standard 372 (Low Lead), ASTM F1960, CSA B137.5.

Accessories

- ___ QER3X 1/2" PEX Expansion Reinforcing Ring w/ stop
- ___ QER4X 3/4" PEX Expansion Reinforcing Ring w/ stop
- ___ QER5X 1" PEX Expansion Reinforcing Ring w/ stop
- ___ QER6X 1-1/4" PEX Expansion Reinforcing Ring w/ stop
- ___ QER7X 1-1/2" PEX Expansion Reinforcing Ring w/ stop
- ___ QER8X 2" PEX Expansion Reinforcing Ring w/ stop
- ___ QEMT345 F1960 Manual Expansion Tool Kit - 1/2" to 1"