




# COLEMANCABLE

## PRODUCT SPECIFICATION

**CATALOG NUMBER:** See table below  
**DESCRIPTION:** Tri-Source® SJTW three receptacle extension cord  
**APPROVALS:** UL Listed and CSA Certified Outdoor Use Cord Set

### CONSTRUCTION PARAMETERS:

Conductor: See table below  
Jacket material: PVC, orange  
Overall cable O.D. (nom): See table below  
Cord rating: Hard Usage per the National Electric Code  
Attachment plug configuration: NEMA 5-15P  
Cord connector configuration: NEMA 5-15R x 3  
Plug and connector material: PVC, orange

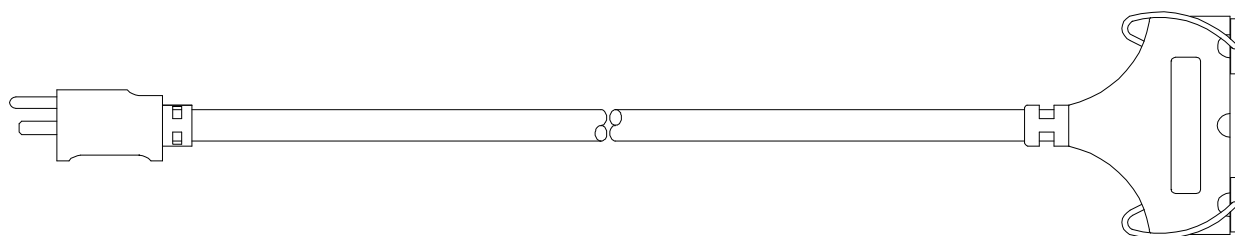

### ELECTRICAL PROPERTIES:

Cable temperature rating: -20 to +60 °C  
Maximum operating voltage: 125 VAC  
Maximum operating current: See table below

### MARKINGS:

Cable legend type: Indent print  
Logo/legend on fittings: "E53440", Coleman Cable logo

Catalog number	Length	Conductor	Cable O.D. (nom)	Current rating
04004	6 ft	14AWG, 41/30 BC	0.352 in	15A
04217	25 ft			
04218	50 ft			13A
04219	100 ft			
04117	25 ft	12AWG, 65/30 BC	0.420 in	15A
04118	50 ft			
04119	100 ft			

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable Systems. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable Systems.

**CUSTOMER APPROVAL:** Approved by: \_\_\_\_\_ Date: \_\_\_\_\_  
Title: \_\_\_\_\_