




25-400: SQUARE PATTERN BRONZE WATER GAUGES

OVERVIEW

Available with 1/2" (ASTM B-16 brass bar stock) or 3/4" (B-584 cast bronze) NPT male pipe connections. Four guard rods and EPDM gauge glass gaskets standard. Other glass gaskets available. Automatic ball checks help prevent the loss of fluids should the glass be broken.

FEATURES

- Standard 1/4" needle drain valve in lower arm
- Pet cock or Apollo® ball valve drain on request
- Polished finish
- Rated=125 psig@350°F, 300 psig@100°F (See note!)
- CRN Registered

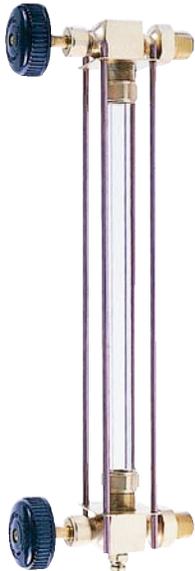

| Part Number | Pipe Size (in.) | Glass O.D. & Length | Wt./100 (lbs.) | Wheel Type |
|-------------|-----------------|---------------------|----------------|-------------|
| 25-404 | 1/2 | 5/8 x 12 | 285 | ALUMINUM |
| 25-405 | 1/2 | 5/8 x 12 | 285 | COMPOSITION |
| 25-407 | 3/4 | 3/4 x 16 | 350 | ALUMINUM |
| 25-408 | 3/4 | 3/4 x 16 | 350 | COMPOSITION |

Note: Service ratings are subject to pressure/temperature ratings of gauge glass and glass gaskets.

OPTIONS

| Suffix Number | Specification |
|---------------|--|
| -00 | Standard gauge w/ standard glass & rod |
| -01 | Top only |
| -02 | Bottom only |
| -03 | Standard gauge less glass & rod |
| -10 | For special gauges w/ non-standard glass and rod lengths |