



SUBMITTAL DATA SHEET

PVC Valves PVC Union Ball Valve - 2064ST

Solvent or FNPT



A.Y. McDonald Mfg. Co. PVC/CPVC Ball Valves & Fittings feature convenience of operation with excellent flow characteristics. Use these sturdy valves for water supply in residential, commercial, and industrial applications.

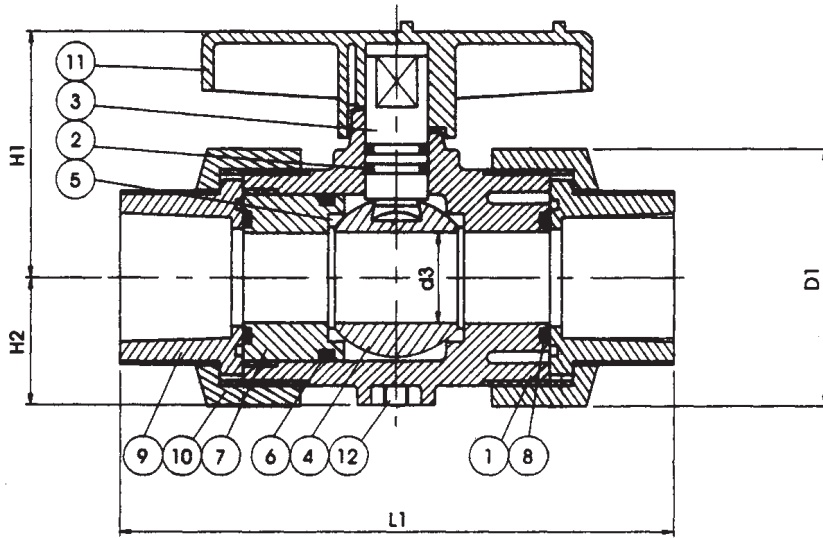

Dimensions

Size	L1	D1	d3	H1	H2
1/2"	4.09	2.08	.59	2.08	1.00
3/4"	4.61	2.40	.79	2.40	1.14
1"	5.20	2.80	1.00	2.79	1.44
1 1/4"	5.79	3.27	1.25	3.24	1.61
1 1/2"	6.57	3.78	1.52	3.58	1.89
2"	7.05	4.57	1.97	4.33	2.15
2 1/2"	9.48	5.91	2.48	5.67	2.87
3"	10.67	6.54	2.95	5.94	3.33
4"	12.72	8.27	3.81	7.08	4.09

Materials

No.	Part	Material
1	Body	PVC
2	Stem O-Ring	EPDM
3	Stem	PVC
4	Ball	PVC
5	Seat Seal	PTFE
6	Carrier O-Ring	EPDM
7	Seal Carrier	PVC
8	Union O-Ring	EPDM
9	End Connector	PVC
10	Union Nut	PVC
11	Handle	ABS
12	Inserted Nut	C3604

SUBMITTAL INFORMATION

- Schedule 80 Specification
- Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2", 3", 4"
- Fits schedule 40 & 80 PVC pipe
- Valve shipped with both FNPT & Solvent connections

Temperature Ratings:

- 150 PSI at 73°F
- 50 PSI at 140°F

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
P.O. Box 508
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
Fax: 1-800-832-9296
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: