





Materials/Finishes:	Pre-Galvanized (310G)	Plastic Coated (310PC)
Variants:	Pre-Galvanized, 3/16" Felt-lined: 1/2" - 2" (310GFL)	
Service:	Designed for the suspension of insulated and non-insulated pipe lines. The plastic coated band hanger protects the pipe from the steel surface of the hanger and is designed to reduce noise, vibration and prevents electrolysis between pipe and the hanger.	
Approvals:	Complies with Federal Specification WW-H-171-E (Type# 10), A-A-1192 A (Type# 10) and Manufacturers' Standardization Society MSS SP-58 and SP-69 (Type# 10). UL approved on sizes 3/4" - 2". FM approved on sizes 3/4" - 2".	
Ordering:	Specify figure number, finish and pipe size.	
Notes:	N/A	

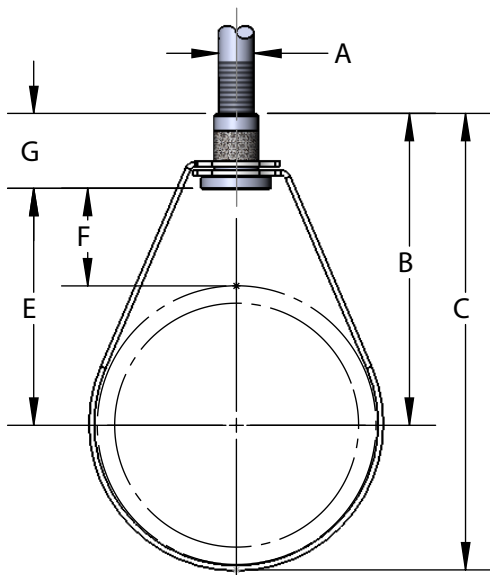

**Domestically
Manufactured**



APPROVED



PIPE SIZE	PIPE OD	MATERIAL SIZE	A	B	C	E	F	G	WGT EACH (lbs)	MAX REC LOAD (lbs)
1/2	0.840	18ga x 5/8	3/8	2-1/2	2-7/8	1-5/8	1-3/16	7/8	0.08	400
3/4	1.050	18ga x 5/8	3/8	2-7/16	2-15/16	1-9/16	1-1/16	7/8	0.08	400
1	1.315	18ga x 5/8	3/8	2-5/8	3-1/4	1-3/4	1-1/16	7/8	0.08	600
1-1/4	1.660	18ga x 5/8	3/8	2-9/16	3-3/8	1-11/16	7/8	7/8	0.10	600
1-1/2	1.900	18ga x 5/8	3/8	2-11/16	3-5/8	1-13/16	7/8	7/8	0.10	600
2	2.375	18ga x 5/8	3/8	3-3/8	4-1/2	2-1/2	1-5/16	7/8	0.12	600
2-1/2	2.875	14ga x 3/4	1/2	3-11/16	5-1/8	2-3/4	1-1/4	1-1/16	0.32	600
3	3.500	14ga x 3/4	1/2	4	5-7/8	3-1/8	1-1/8	1-1/16	0.35	600
3-1/2	4.000	14ga x 3	1/2	4-5/16	6-5/8	3-5/8	1-1/2	1-1/16	0.39	600
4	4.500	13ga x 3/4	5/8	4-15/16	7-1/8	3-7/8	1-1/4	1-1/8	0.43	1000
5	5.563	12ga x 1	5/8	5-5/8	8-1/2	4-3/8	1-3/8	1-1/8	0.65	1000
6	6.625	12ga x 1	3/4	6-11/16	10-1/8	5-5/16	2	1-3/8	1.09	1250
8	8.625	11ga x 1	3/4	8-5/16	12-7/8	6-15/16	2-5/8	1-3/8	1.24	1250

PROJECT INFORMATION			APPROVAL STAMP	
Project:			Notes:	
Address:				
Contractor:				
Engineer:				
Date:				
Approved	Approved as Noted	Not Approved		