



**UPC Code:** 07847706760

**Country Of Origin:** Mexico

**NEMA:**  
L21-20R



## 67W81

20 Amp, 120/208 Volt 3-Phase Y, NEMA L21-20R, 4P, 5W, Flush Mtg Locking Receptacle, Industrial Grade, Grounding, Wetguard w/Cover - YELLOW

Leviton's Wetguard line of industrial watertight wiring devices are the most versatile, well-engineered watertight devices on the market. They meet IP67 and NEMA ratings for water ingress protection, and offer many significant advantages over competitive brands.

### Technical Information

#### AC Horsepower Ratings

**At Rated Voltage:** 2 HP

#### Electrical Specifications

**Current Limiting:** Full Rated Current

**Dielectric Voltage:** Withstands 2000V per UL498

**Temperature Rise:** Max 30C after 250 cycles OL at 200 percent rated current

#### Environmental Specifications

**Flammability:** Rated V-2 per UL 94

**Operating Temperature:** -40°C to 60°C

#### Material Specifications

**Base Material:** Nylon

**Face Material:** Nylon

**Grounding Screw:** Brass 8-32

**Line Contacts:** Brass .040 Thick

**Terminal Screws:** Brass 10-32

**Yoke:** Nickel-Plated Brass .050 Thick

#### Mechanical Specifications

**Product ID:** Ratings and NEMA I.D. permanently marked on device

**Terminal Accom.:** 14-8 AWG

**Terminal ID:** Brass-Hot, Green-Ground, White-Neutral

#### Product Features

**Amperage:** 20 A

**Base Material:** Nylon

**Color:** Yellow

**Face Material:** Nylon

**Grounding:** Grounding

**NEMA:** L21-20R

**Pole:** 4

**Standards and Certifications:** UL/CSA

**Strap Material:** Nickel-Plated Brass

**Termination:** Back

**Voltage:** 120/208 VAC

**Warranty:** Lifetime Warranty

**Wire:** 5

**Device Type:** Locking Outlet

#### Standards and Certifications

**ANSI:** C-73

**CSA C22.2 No. 42:** File LR-406


**NEMA:** WD-6

**NOM:** 057


**UL498:** File E13399

**UL Fed Spec WC-596:** File E13399

## Dimensional Diagram

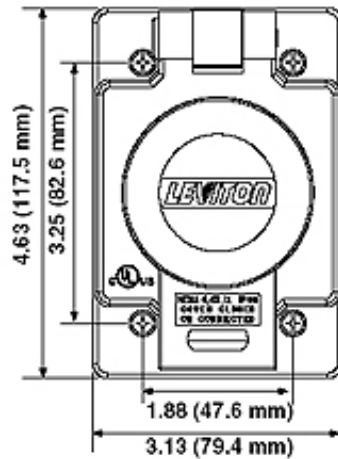

## Wiring Diagram

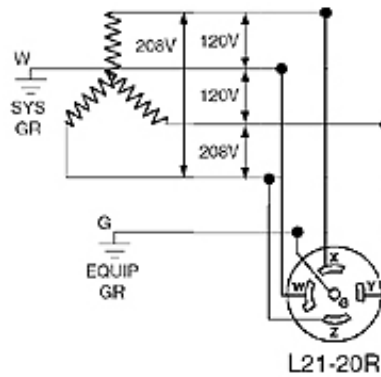

## SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

