

## 68W77

### Item Description

30 Amp, 600 Volt, 3-Phase, NEMA L17-30 , 3P, 4W, Single Locking Inlet with IP66 Rated Cover, Industrial Grade, Grounding, Corrosion Resistant, Wetguard - YELLOW

### Technical Information

#### Electrical Specifications

**Amperage:** 30 A

**Voltage:** 600 VAC

**Pole:** 3

**Wire:** 4

**Grounding:** Grounding

**Dielectric Voltage:** Withstands 2000V per UL498

**Current Limiting:** Full Rated Current

**Temperature Rise:** Max 30C after 250 cycles OL at 200 percent rated current

**Phase:** 3-Phase

#### Environmental Specifications

**Flammability:** Rated V-2 per UL 94 (wiring module)

**Operating Temperature:** -40°C to 60°C

**Enclosure Rating:** NEMA 4, 4X, 12 IEC IP66

**Environment:** Wet

#### Material Specifications

**Cover/Lid:** Valox PBT

**Wiring Module Mounting Cup:** Valox PBT

**Wiring Module:** Nylon

**Cover Gasket:** Santoprene TPV

**Torsion Spring Mechanism:** Stainless Steel

**Blades/Contacts, Terminal Clamps:** Electroless Nickel-coated Brass

**Terminal Screws:** Electroless Nickel-coated Brass

**Mounting & Assembly Screws:** Stainless steel, non-magnetic

#### Mechanical Specifications

**Terminal Accom.:** #12 AWG to #8 AWG

**Terminal ID:** Brass-Hot, Green-Ground, Silver-Neutral

**Product ID:** Ratings and NEMA I.D. permanently marked on device

#### Product Features

**NEMA:** L17-30P

**Color:** Yellow

**Brand:** Wetguard

**Device Type:** Locking Inlet

#### Standards and Certifications

**NEMA:** WD-6

**ANSI:** C-73

**UL:** 498

**CSA:** C22.2 No. 42

**NOM:** 057




**Color:** Yellow

**UPC Code:** 07847751941

**Country Of Origin:** United States

**NEMA:**  
L17-30P



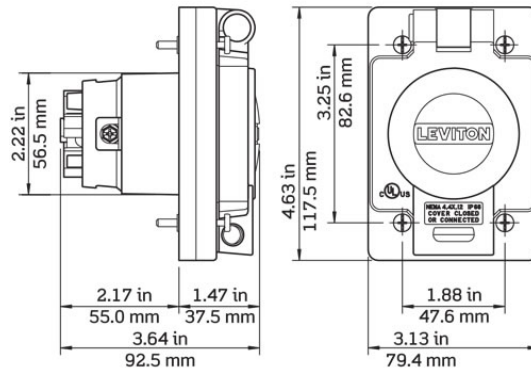

## SPECIFICATION SUBMITTAL

|                      |                      |                      |
|----------------------|----------------------|----------------------|
| JOB NAME:            | CATALOG NUMBERS:     |                      |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| JOB NUMBER:          | <input type="text"/> | <input type="text"/> |

### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

