

# 69W09



Color:  Yellow

UPC Code: 07847707409

Country Of Origin: Mexico

NEMA:  
Non-NEMA



## Item Description

30 Amp, 120/208 Volt 3-Phase Y, Non-NEMA, 4P, 4W, Flush Mtg Locking Receptacle, Industrial Grade, Non-Grounding, Wetguard w/Cover - YELLOW

## Technical Information

### Electrical Specifications

**Current Limiting:** Full Rated Current

**Dielectric Voltage:** Withstands 2000V per UL498

**Temperature Rise:** Max 30C after 250 cycles OL at 200 percent rated current

### Environmental Specifications

**Environment:** Wet

**Flammability:** Rated V-2 per UL 94

**Operating Temperature:** -40°C to 60°C

### Material Specifications

**Base Material:** Nylon

**Face Material:** Nylon

**Grounding Screw:** Brass 8-32

**Line Contacts:** Brass .040 Thick

**Terminal Screws:** Brass 10-32

**Yoke:** Nickel-Plated Brass .050 Thick

### Mechanical Specifications

**Product ID:** Ratings permanently marked on device

**Terminal Accom.:** 18-8 AWG

**Terminal ID:** Brass-Hot, Green-Ground, White-Neutral

### Product Features

**Amperage:** 30 A

**Base Material:** Nylon

**Brand:** Wetguard

**Color:** Yellow

**Face Material:** Nylon

**Grounding:** Non-Grounding

**NEMA:** Non-NEMA

**Pole:** 4

**Standards and Certifications:** Non-UL

**Strap Material:** Nickel-Plated Brass

**Termination:** Back

**Voltage:** 120/208 VAC

**Warranty:** Lifetime Warranty


**Wire:** 4

**Device Type:** Locking Outlet

## Features and Benefits

- Receptacles with cover closed or used with wetguard plug connected meet IP66 standards
- Accept #14 through #8 AWG solid or stranded wire
- Fit all standard FD boxes
- Maintains IP66 water tight rating when box mounted using Leviton back boxes 452CR, 453CR, or 454CR
- Can be panel mounted (not IP66 rated)
- #6-32 mounting screws (4) included

### Dimensional Diagram

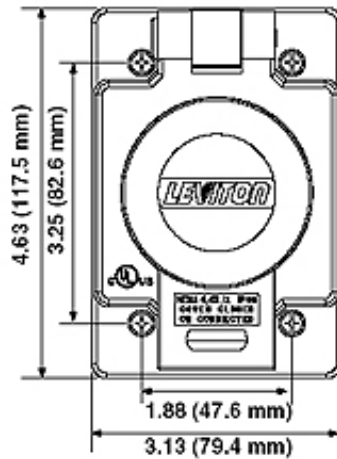

### SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	<input type="text"/>
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

#### Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

#### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

#### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

#### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

