

# LEW ELECTRIC FITTINGS COMPANY



Catalog #0217

Log on to

[www.lewelectric.com](http://www.lewelectric.com)

for complete line catalog and specifications

# Table of Contents

## Residential

PUR Series . . . . .	3-5
Plastic Series . . . . .	6-9
PUFP Series . . . . .	10-14
612 Series . . . . .	15
RCFB Series . . . . .	15
RRP Series . . . . .	16-17
SWB Series . . . . .	18-19
812 Series . . . . .	20-21

## Outdoor . . . . . 22-23

## Desktop Boxes . . . . . 24-25


## PVC

PVC Box and Accessories . . . . .	26
Non-Metallic Covers . . . . .	26
Metal Covers . . . . .	27

## Commercial

Access Series . . . . .	28-29
Rectangular Boxes . . . . .	30-33
Round Boxes . . . . .	34-35
Poke Throughs . . . . .	36
Nozzles . . . . .	37

Replacement Plugs . . . . .	38
Low Voltage Connectivity . . . . .	39

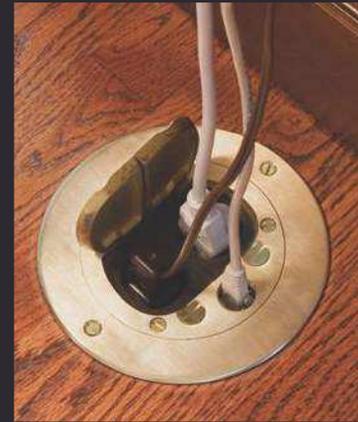

## LEW ELECTRIC FITTINGS COMPANY

»» 4 GENERATIONS FAMILY OWNED AND OPERATED ««

**Lew Electric** is a fourth generation family owned and operated company. Our founder, Jake Lewin, was an electrical engineer and inventor. He designed and produced numerous patented products, the first being a slide connector for couplers, designed in 1930. He was an industry

leader in creating the first floor boxes on the market and some of his designs are still used today. "LEW" was passed on to Jake's wife Lilly upon his death and today is owned and managed by Lilly's grandchildren and great grandchildren.




# PUR Counter Top Boxes



Hidden power keeps surfaces clean and uncluttered

PUR15-S » see page 4

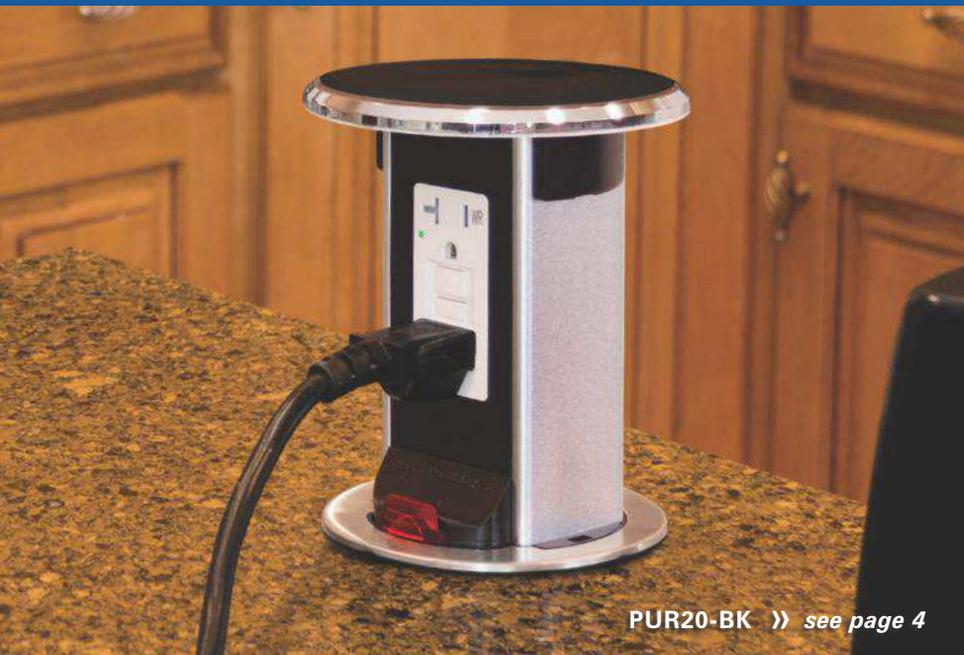

PUR20-BK » see page 4



PUR15-BK-2P » see page 5

## FEATURES AND BENEFITS (pages 3-5)

- Includes 9-foot plugged cord and is not designed to be hardwired.
- For installation on **counters, desktops or under cabinets**
- For use in **kitchens, offices, labs, etc.**
- ETL listed to UL standard 1363: relocatable power tap that passes Spill Test.
- Not to be used in outdoor "wet" locations. Indoor use only.

## PUR Counter Top Boxes

CATALOG #	DESCRIPTION	COVER DIAMETER	IN-USE HEIGHT	UNDER COUNTER DEPTH WHEN CLOSED
PUR15-B	Brass, pop up counter top plate with one 15 AMP (TR) duplex power/ 2USB receptacle	4 13/16"	6 1/4"	9 1/4"
PUR15-BK	Black pop up counter top plate with one 15 AMP (TR) duplex power/ 2USB receptacle	4 13/16"	6 1/4"	9 1/4"
PUR15-OW	Off White pop up counter top plate with one 15 AMP (TR) duplex power/ 2USB receptacle	4 13/16"	6 1/4"	9 1/4"
PUR15-S	Stainless pop up counter top plate with one 15 AMP (TR) duplex power/ 2USB receptacle	4 13/16"	6 1/4"	9 1/4"
PUR20-B	Brass, pop up counter top plate with one 20 AMP GFI (TR) duplex receptacle	4 13/16"	5 5/8"	8 1/2"
PUR20-BK	Black pop up counter top plate with one 20 AMP GFI (TR) duplex receptacle	4 13/16"	5 5/8"	8 1/2"
PUR20-OW	Off White pop up counter top plate with one 20 AMP GFI (TR) duplex receptacle	4 13/16"	5 5/8"	8 1/2"
PUR20-S	Stainless pop up counter top plate with one 20 AMP GFI (TR) duplex receptacle	4 13/16"	5 5/8"	8 1/2"

PUR15-B



PUR15-BK



INCLUDES 15 AMP POWER CORD

PUR15-OW



INCLUDES 15 AMP POWER CORD

PUR15-S



INCLUDES 15 AMP POWER CORD

PUR20-B



INCLUDES 20 AMP POWER CORD

PUR20-BK



INCLUDES 20 AMP POWER CORD

PUR20-OW



PUR20-S



INCLUDES 20 AMP POWER CORD

# PUR Counter Top Boxes

CATALOG #	DESCRIPTION	COVER DIAMETER	IN-USE HEIGHT	UNDER COUNTER DEPTH WHEN CLOSED
PUR15-BK-2P	Black pop up counter top plate with two 15 AMP (TR) duplex power/ 2USB receptacles	4 13/16"	10 3/4"	13 3/4"
PUR15-S-2P	Stainless pop up counter top plate with two 15 AMP (TR) duplex receptacles	4 13/16"	10 3/4"	13 3/4"
<b>THE FOLLOWING 6 ITEMS ARE SPECIAL ORDER ONLY, NON RETURNABLE AND REQUIRE 8-12 WEEKS FOR DELIVERY</b>				
PUR-BK-PQ-6 ①	Black pop up counter top plate with 6 port Comm./Data device (max 3 CAT6 jacks)	4 13/16"	5 7/8"	8 1/2"
PUR-S-PQ-6 ①	Stainless pop up counter top plate with 6 port Comm./Data device (max 3 CAT6 jacks)	4 13/16"	5 7/8"	8 1/2"
PUR-BK-1P1Q ①	Black pop up counter top plate with one 15 AMP (TR) duplex power/ 2USB receptacle & one 6 port Comm./Data device (max 3 CAT6 jacks)	4 13/16"	10 7/8"	13 1/2"
PUR-S-1P1Q ①	Stainless pop up counter top plate with one 15 AMP (TR) duplex power/ 2USB receptacle & one 6 port Comm./Data device (max 3 CAT6 jacks)	4 13/16"	10 7/8"	13 1/2"
PUR-15-BK-PQ ①	Black pop up counter top plate with one 15 AMP (TR) duplex power/ 2USB receptacle & two Comm./Data openings	4 13/16"	9 1/2"	12"
PUR-15-S-PQ ①	Stainless pop up counter top plate with one 15 AMP (TR) duplex power/ 2USB receptacle & two Comm./Data openings	4 13/16"	9 1/2"	12"

① Low volt connectors are included and prewired. Connector types must be specified at time of order.


<p><b>PUR15-BK-2P</b></p>  <p>INCLUDES 15 AMP POWER CORD</p>	<p><b>PUR15-S-2P</b></p> 	<p><b>PUR-BK-PQ-6 (SPECIAL ORDER)</b></p> 	<p><b>PUR-S-PQ-6 (SPECIAL ORDER)</b></p> 
<p><b>PUR-BK-1P1Q (SPECIAL ORDER)</b></p> 	<p><b>PUR-S-1P1Q (SPECIAL ORDER)</b></p>  <p>INCLUDES 15 AMP POWER CORD</p>	<p><b>PUR-15-BK-PQ (SPECIAL ORDER)</b></p>  <p>INCLUDES 15 AMP POWER CORD</p>	<p><b>PUR-15-S-PQ (SPECIAL ORDER)</b></p> 

# Plastic Boxes and Covers NEW

CATALOG #	DESCRIPTION	DIMENSIONS		INTERIOR CAPACITY
		A	B	
PBR-1	Round plastic box with 15 AMP (TR) duplex receptacle included	4 3/8"	3 1/8"	20 Cu. In.
PBR-FPA	Aluminum flip cover for PBR-1	Diameter: 5 1/16"		
PBR-FPB	Brass flip cover for PBR-1	Diameter: 5 1/16"		
PBR-SPA	Aluminum screw cover for PBR-1	Diameter: 5 1/16"		
PBR-SPB	Brass screw cover for PBR-1	Diameter: 5 1/16"		
PBR1-FPA	Round plastic box kit with PBR-FPA cover & 15 AMP (TR) receptacle	5 1/16"	3 1/4"	20 Cu. In.
PBR1-FPB	Round plastic box kit with PBR-FPB cover & 15 AMP (TR) receptacle	5 1/16"	3 1/4"	20 Cu. In.
PBR1-SPA	Round plastic box kit with PBR-SPA cover & 15 AMP (TR) receptacle	5 1/16"	3 1/4"	20 Cu. In.
PBR1-SPB	Round plastic box kit with PBR-SPB cover & 15 AMP (TR) receptacle	5 1/16"	3 1/4"	20 Cu. In.

>>>> For Replacement Plugs, see page 38

PBR-1

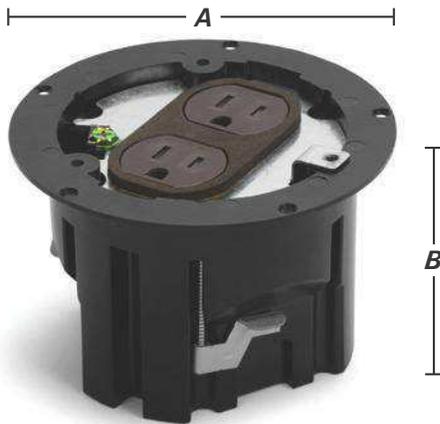

### FEATURES & BENEFITS

- Lightweight** polymer construction
- Options include **choice of covers** (aluminum or brass) and (flip lid or screw plug style)
- Economical savings** over cast iron & stamped metal floor box assemblies
- Ease of installation**
- Adjustable wing clamps** for added installation support

**Install in finished floors only**




Intertek  
4004534

- Conforms to UL514C
- ETL listing #4004534

PBR-FPA



PBR-FPB

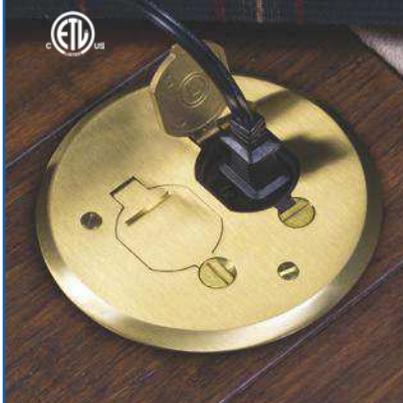

PBR-SPA



PBR-SPB



PBR1-FPA



PBR1-FPB



PBR1-SPA



PBR1-SPB



# Plastic Boxes and Covers NEW

CATALOG #	DESCRIPTION	DIMENSIONS			INTERIOR CAPACITY
		L	W	H	
1101-PB	Single gang plastic box with 15 AMP (TR) duplex receptacle included	4 3/4"	3 1/8"	3 3/8"	22.5 Cu. In.
RRP-2-FPA	Aluminum flip cover for 1101-PB	5 1/8"	3 1/2"		
RRP-2-FPB	Brass flip cover for 1101-PB	5 1/8"	3 1/2"		
RRP-2-SPA	Aluminum screw cover for 1101-PB	5 1/8"	3 1/2"		
RRP-2-SPB	Brass screw cover for 1101-PB	5 1/8"	3 1/2"		
PB1-FPA	Single gang plastic box kit with RRP-2-FPA cover & 15 AMP (TR) receptacle	5 1/8"	3 1/2"	3 5/8"	22.5 Cu. In.
PB1-FPB	Single gang plastic box kit with RRP-2-FPB cover & 15 AMP (TR) receptacle	5 1/8"	3 1/2"	3 5/8"	22.5 Cu. In.
PB1-SPA	Single gang plastic box kit with RRP-2-SPA cover & 15 AMP (TR) receptacle	5 1/8"	3 1/2"	3 5/8"	22.5 Cu. In.
PB1-SPB	Single gang plastic box kit with RRP-2-SPB cover & 15 AMP (TR) receptacle	5 1/8"	3 1/2"	3 5/8"	22.5 Cu. In.

»»»» For Replacement Plugs, see page 38

### 1101-PB



### FEATURES & BENEFITS

- Lightweight** polymer construction
- Options include **choice of covers** (aluminum or brass) and (flip lid or screw plug style)
- Economical savings** over cast iron & stamped metal floor box assemblies
- Ease of installation**
- Adjustable wing clamps** for added installation support




- Conforms to UL514C**
- ETL listing #4004534**

**Install in finished floors only**


### RRP-2-FPA




### RRP-2-FPB

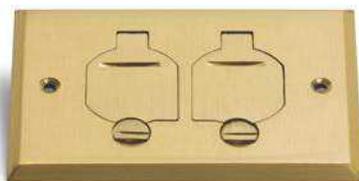

### RRP-2-SPA

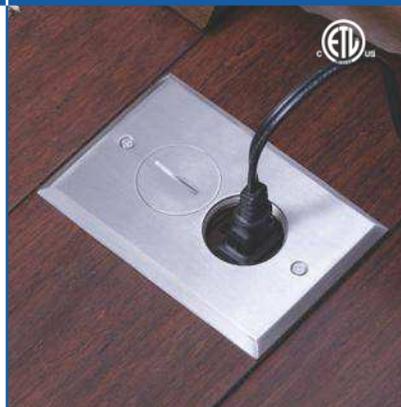

### RRP-2-SPB

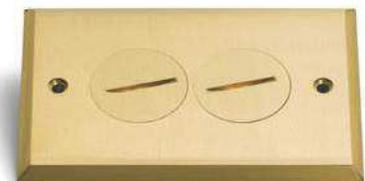

### PB1-FPA



### PB1-FPB



### PB1-SPA



### PB1-SPB



## Plastic Boxes and Covers NEW

CATALOG #	DESCRIPTION	DIMENSIONS			INTERIOR CAPACITY
		L	W	H	
1102-PB	Two gang plastic box with (2) 15 AMP (TR) duplex receptacles included	4 3/4"	4 3/4"	3 3/8"	45 Cu. In.
RRP-4-FPA	Aluminum flip cover for 1102-PB	5"	5"		
RRP-4-FPB	Brass flip cover for 1102-PB	5"	5"		
RRP-4-SPA	Aluminum screw cover for 1102-PB	5"	5"		
RRP-4-SPB	Brass screw cover for 1102-PB	5"	5"		
PB2-FPA ①	Two gang plastic box kit with RRP-4-FPA cover & 2 15 AMP (TR) receptacles	5"	5"	3 5/8"	45 Cu. In.
PB2-FPB ①	Two gang plastic box kit with RRP-4-FPB cover & 2 15 AMP (TR) receptacles	5"	5"	3 5/8"	45 Cu. In.
PB2-SPA ①	Two gang plastic box kit with RRP-4-SPA cover & 2 15 AMP (TR) receptacles	5"	5"	3 5/8"	45 Cu. In.
PB2-SPB ①	Two gang plastic box kit with RRP-4-SPB cover & 2 15 AMP (TR) receptacles	5"	5"	3 5/8"	45 Cu. In.

① also includes one RRP-2-PQ quad port, see page 39

>>>> For Replacement Plugs, see page 38

### 1102-PB



### FEATURES & BENEFITS

- Lightweight** polymer construction
- Options include **choice of covers** (aluminum or brass) and (flip lid or screw plug style)
- Economical savings** over cast iron & stamped metal floor box assemblies
- Ease of installation**
- Adjustable wing clamps** for added installation support


**Install in finished floors only**




**Intertek**  
4004534

- Conforms to UL514C
- ETL listing #4004534

### RRP-4-FPA

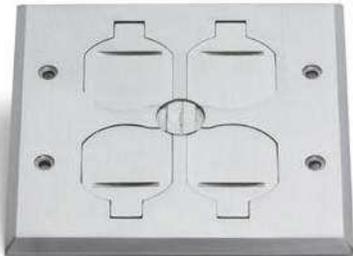

### RRP-4-FPB

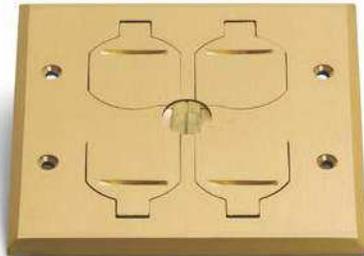

### RRP-4-SPA



### RRP-4-SPB



### PB2-FPA



### PB2-FPB



### PB2-SPA



### PB2-SPB



# Plastic Boxes and Covers NEW

CATALOG #	DESCRIPTION	DIMENSIONS			INTERIOR CAPACITY
		L	W	H	
1103-PB	Three gang plastic box with (3) 15 AMP (TR) duplex receptacles included	4 3/4"	6 5/8"	3 3/8"	64 Cu. In.
RRP-6-FPA	Aluminum flip cover for 1103-PB	5 1/8"	6 15/16"		
RRP-6-FPB	Brass flip cover for 1103-PB	5 1/8"	6 15/16"		
RRP-6-SPA	Aluminum screw cover for 1103-PB	5 1/8"	6 15/16"		
RRP-6-SPB	Brass screw cover for 1103-PB	5 1/8"	6 15/16"		
PB3-FPA ①	Three gang plastic box kit with RRP-6-FPA cover & 3 15 AMP (TR) receptacles	5 1/8"	6 15/16"	3 5/8"	64 Cu. In.
PB3-FPB ①	Three gang plastic box kit with RRP-6-FPB cover & 3 15 AMP (TR) receptacles	5 1/8"	6 15/16"	3 5/8"	64 Cu. In.
PB3-SPA ①	Three gang plastic box kit with RRP-6-SPA cover & 3 15 AMP (TR) receptacles	5 1/8"	6 15/16"	3 5/8"	64 Cu. In.
PB3-SPB ①	Three gang plastic box kit with RRP-6-SPB cover & 3 15 AMP (TR) receptacles	5 1/8"	6 15/16"	3 5/8"	64 Cu. In.

① also includes one RRP-2-PQ quad port, see page 39

»»»» For Replacement Plugs, see page 38

1103-PB

FEATURES & BENEFITS



- Lightweight** polymer construction
- Options include **choice of covers** (aluminum or brass) and (flip lid or screw plug style)
- Economical savings** over cast iron & stamped metal floor box assemblies
- Ease of installation**
- Adjustable wing clamps** for added installation support

**Install in finished floors only**



- Conforms to UL514C**
- ETL listing #4004534**

RRP-6-FPA

RRP-6-FPB

RRP-6-SPA

RRP-6-SPB



PB3-FPA

PB3-FPB

PB3-SPA

PB3-SPB



# Residential

10 >>>>>>

PUR Series

Plastic Box Series

**PUFP Series**

612 Series

RFCB Series

RRP Series

SWB Series

812 Series

LEW ELECTRIC FITTINGS COMPANY

For more information, call 630-665-2075

[www.lewelectric.com](http://www.lewelectric.com)




# PUFPP Counter Top Boxes

CATALOG #	DESCRIPTION
PUFPP-CT-SS	Stainless Steel, pop out counter top plate assembly, with 20 AMP (TR) GFI receptacle
PUFPP-CT-SS-2USB	Stainless Steel, pop out counter top plate assembly, with 15 AMP (TR) duplex power/ 2USB receptacle
PUFPP-CT-SS-6PORT	Stainless Steel, pop out counter top plate assembly, with 6 port Comm./Data device (max 3 CAT6 jacks)
PUFPP-CT-HOSPITAL-SS	Stainless Steel, pop out counter top plate assembly, with hospital grade 20 AMP (TR) duplex power/ 2USB receptacle

>>>> All counter top plates 4 7/8 W x 4 3/4 L x 3 1/2 H and include PUFPP-WB box

PUFPP-CT-SS

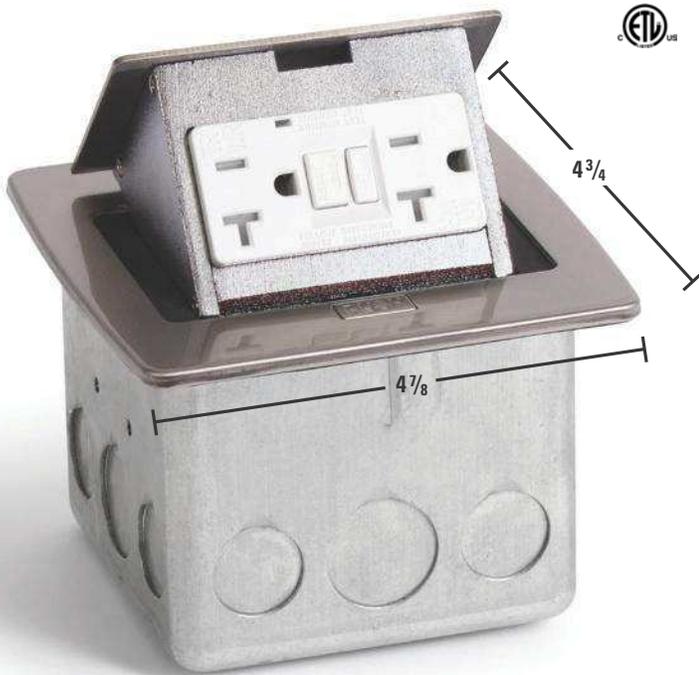

PUFPP-CT-SS-2USB



## FEATURES & BENEFITS

- UL recognized** 498, 514A, 943, 1059, and NEC 210.52(C).  
**CUL recognized** 22.2 #'s 42, 158, and 18.1-04.
- UL Listed Receptacle: E60120
- Pops up** when in use
- Hides in the box** when not in use
- Complies with **NEC code 406.5(E)** for use in counter tops
- For **residential or commercial** applications
- Installs in **wood floors**
- Scrub water tight** construction
  - All PUFPP style supplied with **tamper resistant** receptacles

PUFPP-CT-SS-6PORT



PUFPP-CT-HOSPITAL-SS




Conforms to UL STD.514A and 498;  
 Certified to CSA STD.C22.2.; No.18.1-04 and  
 42-M1984; LEW ELECTRIC FITTINGS CO

## PUFP Counter Top Boxes

CATALOG #	DESCRIPTION
PUFP-CT-B	Brass, pop out counter top plate assembly, with 20 AMP (TR) GFI receptacle
PUFP-CT-B-2USB	Brass, pop out counter top plate assembly, with 15 AMP (TR) duplex power/ 2USB receptacle
PUFP-CT-BK	Black, pop out counter top plate assembly, with 20 AMP (TR) GFI receptacle
PUFP-CT-BK-2USB	Black, pop out counter top plate assembly, with 15 AMP (TR) duplex power/ 2USB receptacle
PUFP-CT-BK-6PORT	Black, pop out counter top plate assembly, with 6 port Comm./Data device (max 3 CAT6 jacks)
PUFP-CT-OW	Off-White, pop out counter top plate assembly, with 20 AMP (TR) GFI receptacle
PUFP-CT-OW-2USB	Off-White, pop out counter top plate assembly, with 15 AMP (TR) duplex power/ 2USB receptacle

>>>> All counter top plates 4 7/8" W x 4 3/4" L x 3 1/2" H and include PUFP-WB box

PUFP-CT-B

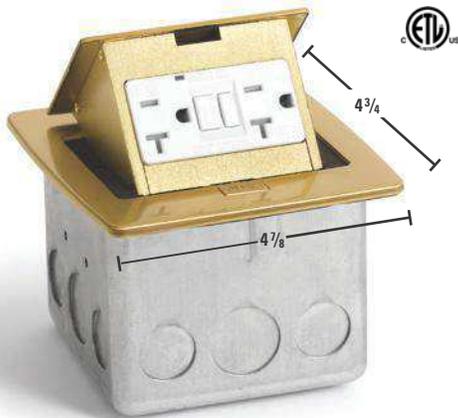

PUFP-CT-B-2USB



PUFP-CT-BK



PUFP-CT-BK-2USB



PUFP-CT-BK-6PORT




FEATURES & BENEFITS

- **UL recognized** 498, 514A, 943, 1059, and NEC 210.52(C).  
**CUL recognized** 22.2 #'s 42, 158, and 18.1-04.
- UL Listed Receptacle: E60120
- **Pops up** when in use
- **Hides in the box** when not in use
- Complies with **NEC code 406.5(E)** for use in counter tops
- For **residential or commercial** applications
- Installs in **wood floors**
- **Scrub water tight** construction
- All PUFP style supplied with **tamper resistant** receptacles

PUFP-CT-OW



PUFP-CT-OW-2USB

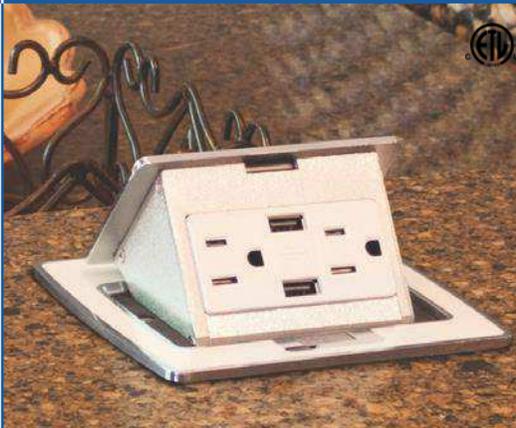

Conforms to UL STD.514A and 498;  
Certified to CSA STD.C22.2.; No.18.1-04 and  
42-M1984; LEW ELECTRIC FITTINGS CO

Intertek  
4004534

# PUFP Square Floor Boxes

CATALOG #	DESCRIPTION
PUFP-SQ-BR	Brass, pop out floor plate assembly, with 15 AMP (TR) duplex power receptacle
PUFP-SQ-BR-GFI	Brass, pop out floor plate assembly, with 20 AMP (TR) GFI receptacle
PUFP-SQ-BR-USB	Brass, pop out floor plate assembly, with 15 AMP (TR) duplex power/ 2USB receptacle
PUFP-SQ-SS	Stainless Steel, pop out floor plate assembly, with 15 AMP (TR) duplex power receptacle
PUFP-SQ-SS-GFI	Stainless Steel, pop out floor plate assembly, with 20 AMP (TR) GFI receptacle
PUFP-SQ-SS-USB	Stainless Steel, pop out floor plate assembly, with 15 AMP (TR) duplex power/ 2USB receptacle

>>>> For PUFPP-SQ Features and Benefits, see page 12

>>>> All floor plates 4 3/4 W x 4 3/4 L x 3 5/8 H and include PUFPP-WB box

PUFP-SQ-BR



PUFP-SQ-BR-GFI



PUFP-SQ-BR-USB



PUFP-SQ-SS



PUFP-SQ-SS-GFI



PUFP-SQ-SS-USB



FOR ALL PUFPP-SQ



Conforms to UL STD.514A and 498;  
Certified to CSA STD.C22.2.; No.18.1-04 and  
42-M1984; LEW ELECTRIC FITTINGS CO

Intertek  
4004534

## PUFP Covers and Boxes

CATALOG #	DESCRIPTION
PUFP-B	6" Brass pop out floor plate with 15 AMP (TR) GFI receptacle
PUFP-BC	6" Brass pop out floor plate with 6 port Comm./Data device (max 3 CAT6 jacks)
PUFP-BD	6" Brass pop out floor plate with 15 AMP (TR) decora receptacle
PUFP-S	6" Stainless steel pop out floor plate with 15 AMP (TR) GFI receptacle
PUFP-SC	6" Stainless steel pop out floor plate with 6 port Comm./Data device (max 3 CAT6 jacks)
PUFP-SD	6" Stainless steel pop out floor plate with 15 AMP (TR) decora receptacle
PUFP-LRA	Leveling ring for PUFP plates

CATALOG #	DESCRIPTION	DIMENSIONS	
		A (WIDTH)	B (HEIGHT)
PUFP-HB	Concrete box for PUFP plates	4 5/16"	3 1/4"
PUFP-WB	Wood floor box for PUFP plates	3 7/8"	3 1/8"
FB	PVC floor box (must use in conjunction with PUFP-LRA to mount cover); box UL listed #514C	5"	6"

PUFP-B



PUFP-BC



PUFP-BD



### FEATURES & BENEFITS

- UL recognized** 498, 514A, 943, 1059, and NEC 210.52(C).  
**CUL recognized** 22.2 #'s 42, 158, and 18.1-04.
- Pops up** when in use
- Hides in the box** when not in use
- Complies with **NEC code 406.5(E)** for use in counter tops
- For **residential or commercial** applications
- Installs in **concrete or wood** floors
- Scrub water tight** construction
- All PUFP style supplied with **tamper resistant** receptacles

PUFP-S



PUFP-SC



PUFP-SD



Conforms to UL STD.514A and 498;  
Certified to CSA STD.C22.2.; No.18.1-04 and 42-M1984; LEW ELECTRIC FITTINGS CO

PUFP-LRA



PUFP-HB



PUFP-WB



FB



# 612 Boxes and Covers

CATALOG #	DESCRIPTION	DIMENSIONS		CONDUIT OPENINGS	INTERIOR CAPACITY
		A	B		
612-RSS-1 ①	Recessed stamped steel box assembly with DFB-1-1/2 BRASS COVER and 15 AMP (TR) receptacle	5 3/4"	4 3/8"	Sides (8) 1/2" Bottom (1) 1/2"	18 Cu. In.
612-RSS-1-GFI ①	Recessed stamped steel box assembly with DFB-1-1/2 BRASS COVER and decora mounting plate	5 3/4"	4 3/8"	Sides (8) 1/2" Bottom (1) 1/2"	18 Cu. In.
612-RSS-1-TEL ①	Recessed stamped steel box assembly with DFB-1-1/2 COVER and communication mounting plate	5 3/4"	4 3/8"	Sides (8) 1/2" Bottom (1) 1/2"	18 Cu. In.
612-RSS-2 ①	Recessed stamped steel box assembly with DFB-LR-1/2 BRASS COVER and 15 AMP (TR) receptacle	5 3/4"	4 3/8"	Sides (8) 1/2" Bottom (1) 1/2"	18 Cu. In.
CATALOG #	DESCRIPTION				
DFB-1-1/2 ①	Brass hinged 4" cover (1/4" thick) for duplex with 1/2" plug for Comm./Data				
DFB-LR-1/2 ①	Brass dual hinged cover (1/4" thick) for duplex with 1/2" plug for Comm./Data				

① Add -A for Aluminum finish

>>>> UL listing: box #E345966; tamper resistant receptacle #E333616 (duplex); cover UL recognized components

>>>> For Replacement Plugs, see page 38



# RCFB Boxes and Covers

CATALOG #	DESCRIPTION
RCFB-1	Recessed hybrid floor box
RCFB-1-BP	Replacement cover for RCFB-1
RCFB-1-A	Aluminum recessed hybrid floor box
RCFB-1-AP	Aluminum replacement cover for RCFB-1-A
RCFB-2	Recessed hybrid two gang floor box
RCFB-2-BP	Replacement cover for RCFB-2

>>>> For Replacement Plugs, see page 38

RCFB-1	RCFB-1-A	RCFB-2
<p>RCFB-1-BP » Replacement cover</p> <p>□ 5" W x 5" L x 4" H □ 36 Cu. In.</p>	<p>RCFB-1-AP » Replacement cover</p>	<p>RCFB-2-BP » Replacement cover</p> <p>□ 5 1/16" W x 8 5/8" L x 4" H □ 72 Cu. In.</p>
<p><b>UL &amp; NEMA</b></p> <p>□ Box UL #E345966                  □ Tamper resistant receptacle UL #E333616 (duplex)</p>		<p><b>BENEFITS</b></p> <p>□ Water tight close up plugs                  □ Rubber grommets provided for wire protection</p>

# Residential

16 >>>>>

PUR Series

Plastic Box Series

PUPF Series

612 Series

RCFB Series

**RRP Series**

SWB Series

812 Series

LEW ELECTRIC FITTINGS COMPANY

For more information, call 630-665-2075

[www.lewelectric.com](http://www.lewelectric.com)



# RRP Boxes and Covers

CATALOG #	DESCRIPTION
RRP-1-BP	Brass Plated recessed floor plate assembly (single receptacle); includes 15 AMP (TR) receptacle
RRP-1-BPR	Replacement cover for RRP-1-BP
RRP-1-NP	Nickel Plated recessed floor plate assembly (single receptacle); includes 15 AMP (TR) receptacle
RRP-1-NPR	Replacement cover for RRP-1-NP
RRP-2 ① ②	Recessed floor plate assembly (duplex receptacle); includes 15 AMP (TR) receptacle
RRP-2 ① ② -T	Recessed floor plate assembly (duplex Comm./Data); RRP-2-PQ quad port included, see page 39
RRP-2-AR	Aluminum replacement cover for RRP-2-A
RRP-2-BR	Brass replacement cover for RRP-2
RRP-2-NSR	Nickel Silver replacement cover for RRP-2-NS
RRP-2-LR ①	Recessed floor plate flip lid assembly (duplex receptacle); includes 15 AMP (TR) receptacle
RRP-2-LR ① -T	Recessed floor plate flip lid assembly (duplex Comm./Data); RRP-2-PQ quad port included, see page 39
RRP-2-LRR	Brass replacement cover for RRP-2-LR
RRP-2-LR-AR	Aluminum replacement cover for RRP-2-LR-A

① add -A for Aluminum finish; ② add -NS for Nickel Silver finish

>>>> For Replacement Plugs, see page 38


<p style="text-align: center;"><b>RRP-1-BP</b></p> <p style="text-align: center;"><b>RRP-1-BPR</b> » Replacement cover</p>  <p style="text-align: center;">□ 2 13/16" W x 4 5/8" L</p>	<p style="text-align: center;"><b>RRP-1-NP</b></p> <p style="text-align: center;"><b>RRP-1-NPR</b> » Replacement cover</p> 	<p style="text-align: center;"><b>RRP-2</b></p> <p style="text-align: center;"><b>RRP-2-BR</b> » Replacement cover</p>  <p style="text-align: center;">□ 2 7/8" W x 5" L</p>
<p style="text-align: center;"><b>RRP-2-A</b></p> <p style="text-align: center;"><b>RRP-2-AR</b> » Replacement cover</p> 	<p style="text-align: center;"><b>RRP-2-NS</b></p> <p style="text-align: center;"><b>RRP-2-NSR</b> » Replacement cover</p> 	<p style="text-align: center;"><b>RRP-2-LR</b></p> <p style="text-align: center;"><b>RRP-2-LRR</b> » Replacement cover</p> 
<p style="text-align: center;"><b>RRP-2-LR-A</b></p> <p style="text-align: center;"><b>RRP-2-LR-AR</b> » Replacement cover</p> 	<p style="text-align: center;"><b>UL &amp; NEMA RECOGNITION</b></p> <ul style="list-style-type: none"> <li>☐ Meets NEMA WD1-1983 heavy duty requirement for display receptacle</li> <li>☐ All receptacles tamper resistant; UL listing #E333616 (duplex); E237396 (single)</li> </ul>	<p style="text-align: center;"><b>FEATURES &amp; BENEFITS</b></p> <ul style="list-style-type: none"> <li>☐ Fits any manufacturer's 3 1/2" deep switch box</li> <li>☐ Receptacle with neoprene gasket included</li> <li>☐ Water tight assembly</li> <li>☐ Adjustable up to 3/4" to accommodate any floor</li> </ul>

## SWB Boxes and Covers

CATALOG #	DESCRIPTION
SWB-1-BP	Brass Plated recessed floor plate assembly (single receptacle with box); includes 15 AMP (TR) receptacle
RRP-1-BPR	Replacement cover for SWB-1-BP
SWB-1-NP	Nickel Plated recessed floor plate assembly (single receptacle with box); includes 15 AMP (TR) receptacle
RRP-1-NPR	Replacement cover for SWB-1-NP
SWB-2 ① ②	Recessed floor plate assembly (duplex receptacle with box); includes 15 AMP (TR) receptacle
SWB-2 ① ② -T	Recessed floor plate assembly (Comm./Data with box); <i>RRP-2-PQ quad port included, see page 39</i>
RRP-2-AR	Aluminum replacement cover for SWB-2-A
RRP-2-BR	Brass replacement cover for SWB-2
RRP-2-NSR	Nickel Silver replacement cover for SWB-2-NS
SWB-2-LR ①	Recessed floor plate flip lid assembly (duplex receptacle with box); includes 15 AMP (TR) receptacle
SWB-2-LR ① -T	Recessed floor plate flip lid assembly (Comm./Data with box); <i>RRP-2-PQ quad port included, see page 39</i>
RRP-2-LRR	Brass replacement cover for SWB-2-LR
RRP-2-LR-AR	Aluminum replacement cover for SWB-2-LR-A

① add -A for Aluminum finish; ② add -NS for Nickel Silver finish

>>>> For Replacement Plugs, see page 38
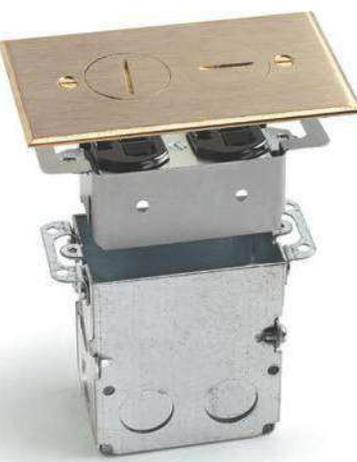
<p><b>SWB-1-BP</b></p> <p>RRP-1-BPR » Replacement cover</p>  <p>□ 2<sup>13</sup>/<sub>16</sub>" W x 4<sup>5</sup>/<sub>8</sub>" L x 4" H □ 18 Cu. In.</p>	<p><b>SWB-1-NP</b></p> <p>RRP-1-NPR » Replacement cover</p> 	<p><b>SWB-2</b></p> <p>RRP-2-BR » Replacement cover</p>  <p>□ 2<sup>7</sup>/<sub>8</sub>" W x 5" L x 4" H □ 18 Cu. In.</p>	<p><b>SWB-2-A</b></p> <p>RRP-2-AR » Replacement cover</p> 
<p><b>SWB-2-NS</b></p> <p>RRP-2-NSR » Replacement cover</p> 	<p><b>SWB-2-LR</b></p> <p>RRP-2-LRR » Replacement cover</p>  <p>□ 2<sup>7</sup>/<sub>8</sub>" W x 5" L x 4" H □ 18 Cu. In.</p>	<p><b>UL &amp; NEMA RECOGNITION</b></p> <ul style="list-style-type: none"> <li>□ Box UL #E345966</li> <li>□ Meets NEMA WD1-1983 heavy duty requirement for display receptacle</li> <li>□ All receptacles tamper resistant; UL listing #E333616 (duplex); E237396 (single)</li> </ul> <p><b>FEATURES &amp; BENEFITS</b></p> <ul style="list-style-type: none"> <li>□ Versatile <i>power</i> or <i>communications</i> applications</li> <li>□ Water tight assembly</li> <li>□ 1/2" Conduit knockouts</li> <li>□ <b>Adjustable</b> up to 3/4" to accommodate any floor</li> </ul>	<p><b>SWB-2-LR-A</b></p> <p>RRP-2-LR-AR » Replacement cover</p> 

# SWB Boxes and Covers

CATALOG #	DESCRIPTION
SWB-4 ①	Two gang, divided, recessed floor plate assembly with brass screw plug cover. Includes 2 15 AMP (TR) receptacles
SWB-4-A ①	Two gang, divided, recessed floor plate assembly with aluminum screw plug cover. Includes 2 15 AMP (TR) receptacles
SWB-4-LR ①	Two gang, divided, recessed floor plate assembly with brass flip lid cover. Includes 2 15 AMP (TR) receptacles
SWB-4-LR-A ①	Two gang, divided, recessed floor plate assembly with aluminum flip lid cover. Includes 2 15 AMP (TR) receptacles
RRP-4-AP	Aluminum replacement cover for SWB-4 series ( <b>screw plug lid</b> )
RRP-4-AP-LR	Aluminum replacement cover for SWB-4 series ( <b>flip lid</b> )
RRP-4-BP	Brass replacement cover for SWB-4 series ( <b>screw plug lid</b> )
RRP-4-BP-LR	Brass replacement cover for SWB-4 series ( <b>flip lid</b> )
SWB-6 ① ( <i>Screw Plug</i> )	Three gang, divided, recessed floor plate assembly with brass screw plug cover. Includes 3 15 AMP (TR) receptacles
SWB-6-A ① ( <i>Screw Plug</i> )	Three gang, divided, recessed floor plate assembly with aluminum screw plug cover. Includes 3 15 AMP (TR) receptacles
RRP-6-BP	Brass replacement cover for SWB-6 series ( <b>screw plug lid</b> )
RRP-6-AP	Aluminum replacement cover for SWB-6 series ( <b>screw plug lid</b> )
SWB-6-LR ① ( <i>Flip Lid</i> )	Three gang, divided, recessed floor plate assembly with brass flip lid cover. Includes 3 15 AMP (TR) receptacles
SWB-6-LR-A ① ( <i>Flip Lid</i> )	Three gang, divided, recessed floor plate assembly with aluminum flip lid cover. Includes 3 15 AMP (TR) receptacles
RRP-6-BP-LR	Brass replacement cover for SWB-6 series ( <b>flip lid</b> )
RRP-6-AP-LR	Aluminum replacement cover for SWB-6 series ( <b>flip lid</b> )

① also includes one RRP-2-PQ quad port, see page 39

>>>> For Replacement Plugs, see page 38



### UL & NEMA RECOGNITION

- Box UL #E345966
- Meets NEMA WD1-1983 heavy duty requirement for display receptacle
- All receptacles tamper resistant; UL listing #E333616 (duplex); E237396 (single)

### FEATURES & BENEFITS

- Versatile **power** or **communications** applications
- Water tight assembly
- 1/2" Conduit knockouts
- Adjustable** up to 3/4" to accommodate any floor

## 812 Boxes

CATALOG #	DESCRIPTION	DIMENSIONS		CONDUIT OPENINGS	INTERIOR CAPACITY
		A	B		
812	Cast iron round floor box with duplex receptacle Does not include cover	4"	3"	Sides (2)- $\frac{3}{4}$ " & (2)- $\frac{1}{2}$ " Bottom (2)- $\frac{1}{2}$ "	14.5 Cu. In.
812-DFB	Floor box furnished with 523-DP BRASS COVER & 15 AMP (TR) duplex receptacle	4"	3 $\frac{1}{8}$ "	Sides (2)- $\frac{3}{4}$ " & (2)- $\frac{1}{2}$ " Bottom (2)- $\frac{1}{2}$ "	14.5 Cu. In.
812-DFB-A	Floor box furnished with 523-DP-A ALUMINUM COVER & 15 AMP (TR) duplex receptacle	4"	3 $\frac{1}{8}$ "	Sides (2)- $\frac{3}{4}$ " & (2)- $\frac{1}{2}$ " Bottom (2)- $\frac{1}{2}$ "	14.5 Cu. In.
812-DFB-NS	Floor box furnished with 523-DP-NS NICKEL SILVER COVER & 15 AMP (TR) duplex receptacle	4"	3 $\frac{1}{8}$ "	Sides (2)- $\frac{3}{4}$ " & (2)- $\frac{1}{2}$ " Bottom (2)- $\frac{1}{2}$ "	14.5 Cu. In.
812-DFB-W/524	Floor box furnished with 524 BRASS COVER and tel. jack	4"	3 $\frac{1}{8}$ "	Sides (2)- $\frac{3}{4}$ " & (2)- $\frac{1}{2}$ " Bottom (2)- $\frac{1}{2}$ "	14.5 Cu. In.
812-DFB-LR	Floor box furnished with DFB-LR BRASS COVER & 15 AMP (TR) duplex receptacle	4"	3 $\frac{3}{8}$ "	Sides (2)- $\frac{3}{4}$ " & (2)- $\frac{1}{2}$ " Bottom (2)- $\frac{1}{2}$ "	14.5 Cu. In.
812-DFB-LR-A	Floor box furnished with DFB-LR-A ALUMINUM COVER & 15 AMP (TR) duplex receptacle	4"	3 $\frac{3}{8}$ "	Sides (2)- $\frac{3}{4}$ " & (2)- $\frac{1}{2}$ " Bottom (2)- $\frac{1}{2}$ "	14.5 Cu. In.
812-DFB-LR-W/2XLR	Floor box furnished with DFB-LR BRASS COVER & dual XLR microphone jacks	4"	3 $\frac{3}{8}$ "	Sides (2)- $\frac{3}{4}$ " & (2)- $\frac{1}{2}$ " Bottom (2)- $\frac{1}{2}$ "	14.5 Cu. In.
812-DFB-LR-W/2XLR-A	Floor box furnished with DFB-LR-A ALUMINUM COVER & dual XLR microphone jacks	4"	3 $\frac{3}{8}$ "	Sides (2)- $\frac{3}{4}$ " & (2)- $\frac{1}{2}$ " Bottom (2)- $\frac{1}{2}$ "	14.5 Cu. In.
812-DFB-W/DFB-1	Floor box furnished with DFB-1 BRASS COVER & 15 AMP (TR) duplex receptacle	4"	3 $\frac{3}{8}$ "	Sides (2)- $\frac{3}{4}$ " & (2)- $\frac{1}{2}$ " Bottom (2)- $\frac{1}{2}$ "	14.5 Cu. In.
812-DFB-W/DFB-1-A	Floor box furnished with DFB-1-A ALUMINUM COVER & 15 AMP (TR) duplex receptacle	4"	3 $\frac{3}{8}$ "	Sides (2)- $\frac{3}{4}$ " & (2)- $\frac{1}{2}$ " Bottom (2)- $\frac{1}{2}$ "	14.5 Cu. In.
40201-001	Ivory telephone jack for 812 series				

>>>> 812 Series UL listing #514A, #489H and CUL recognized 22.2 #18.1-04

>>>> UL listed receptacle #E333616

>>>> For Replacement Plugs, see page 38




# 812 Covers and Flanges

CATALOG #	DESCRIPTION
DFB-LR ①	Brass, dual hinged cover (1/4" thick) for duplex
DFB-LR-A ①	Aluminum, dual hinged cover (1/4" thick) for duplex
DFB-1 ①	Brass, hinged cover (1/4" thick) for duplex
DFB-1-A ①	Aluminum, hinged cover (1/4" thick) for duplex
TCP-1 ③	5 3/4" Brass flanged cover, with 2" - 1/2" combo plug for Comm./Data. Or single receptacle
TCP-1-NS ③	5 3/4" Nickel Silver flanged cover, with 2" - 1/2" combo plug for Comm./Data. Or single receptacle
TCP-2 ③	5 3/4" Brass flanged cover, with (2) 1 1/2", screw plugs for duplex power or Comm./Data
TCP-2-A ③	5 3/4" Aluminum flanged cover, with (2) 1 1/2", screw plugs for duplex power or Comm./Data
TCP-2-NS ③	5 3/4" Nickel Silver flanged cover, with (2) 1 1/2", screw plugs for duplex power or Comm./Data
TCP-2-LR ③	5 3/4" Seamless Brass flanged cover, with dual flip lid and duplex mounting plate
TCP-2-LR-A ③	5 3/4" Seamless Aluminum flanged cover, with dual flip lid and duplex mounting plate
523-DP ①	Brass, cover (1/8" thick) with (2) 1 1/2" screw plugs for duplex
523-DP-A ①	Aluminum, cover (1/8" thick) with (2) 1 1/2" screw plugs for duplex
523-DP-NS ①	Nickel Silver, cover (1/8" thick) with (2) 1 1/2" screw plugs for duplex (C/US UL Listed)
524 ①	Brass, cover (1/8" thick) with 2" - 1/2" combo plug for Comm./Data
SCF-1 ②	Brass, flange 5 1/4" diameter
SCF-1-CP ②	Clear plastic, flange 5 3/4" diameter
SCF-1-A ②	Aluminum, flange 5 1/4" diameter
TCP-GR1	Brass goof ring for 812 series; O.D. 7 1/2", I.D. 4"
TCP-GR2	Brass goof ring for 812 series; O.D. 7 1/2", I.D. 4 1/2"

① 4" cover; ② SCF-1 Series fits 4" plates only; ③ 5 3/4" cover

>>>> UL recognized components

>>>> For Replacement Plugs, see page 38

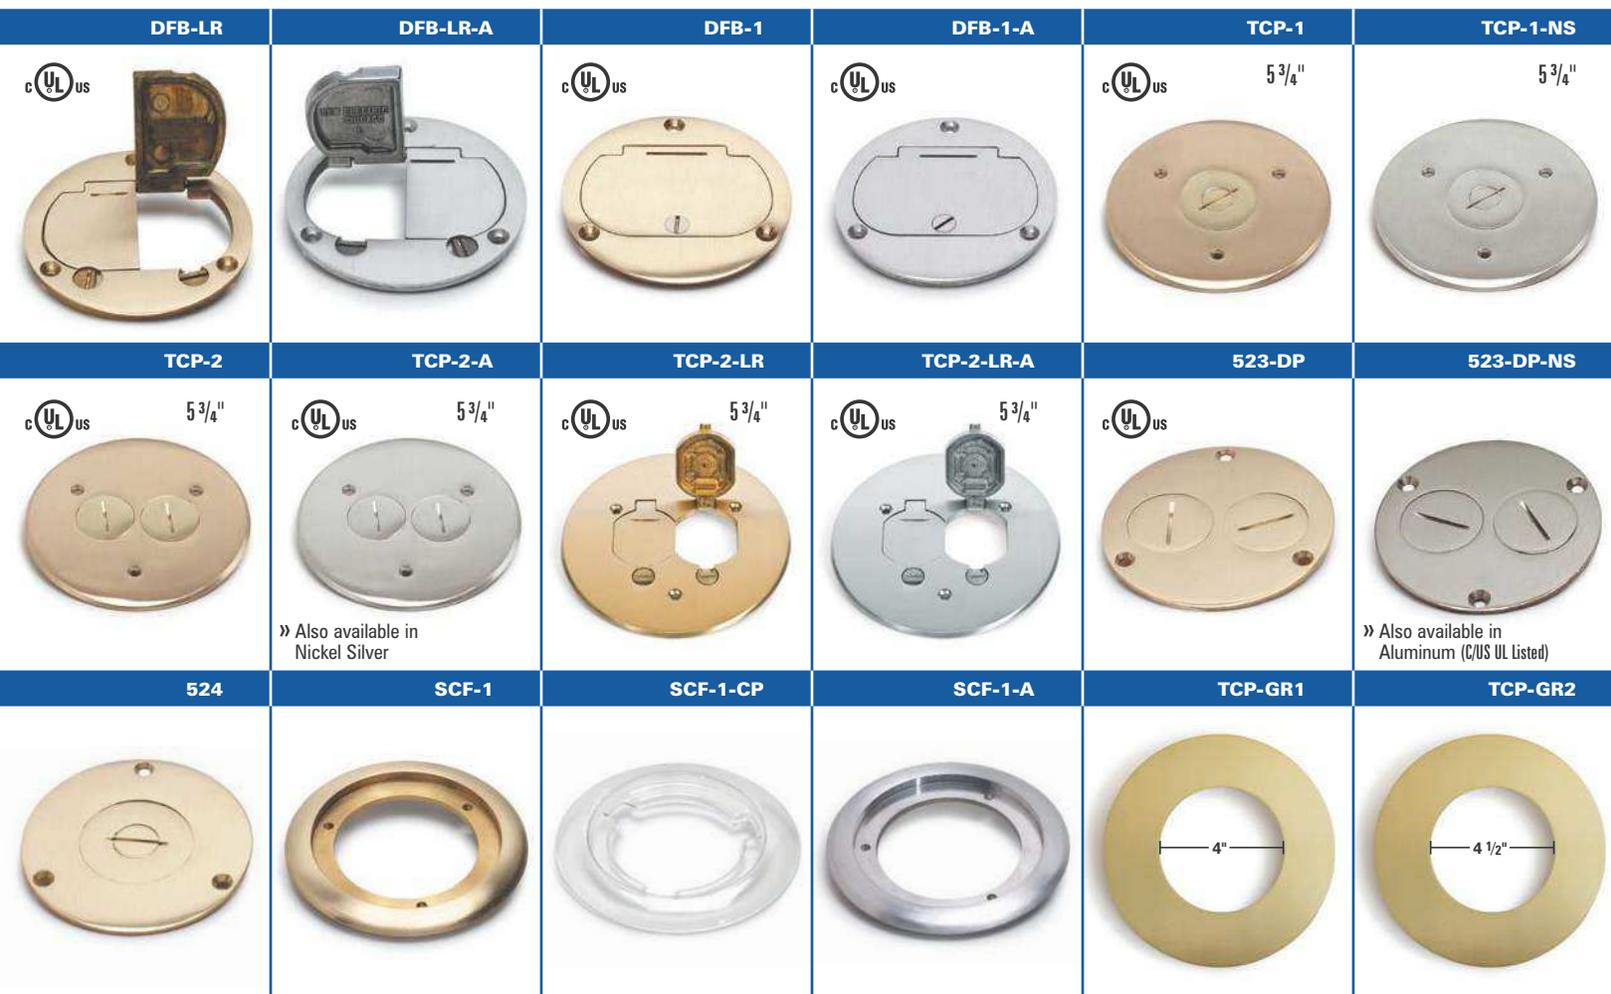



OB-1-SH >> see page 23



# OUTDOOR

CATALOG #	DESCRIPTION
OB-1-SP	Outdoor floor box with stainless cover; <b>Push Button Open</b> ; Fully IP66 rated water proof ( <i>when in closed position</i> ). Includes wrench for inside wire connections.
OB-1-SH	Outdoor floor box with stainless cover; <b>Hex Key Open</b> ; Fully IP66 rated water proof ( <i>when in closed position</i> ). Includes wrench for inside wire connections.
OB-1-SP-6PORT <sup>1</sup>	Outdoor floor box for Comm./Data with stainless cover: <b>Push Button Open</b> ; Fully IP66 rated water proof ( <i>when in closed position</i> ). Includes wrench for inside wire connections.
OB-1-SH-6PORT <sup>1</sup>	Outdoor floor box for Comm./Data with stainless cover: <b>Hex Key Open</b> ; Fully IP66 rated water proof ( <i>when in closed position</i> ). Includes wrench for inside wire connections.

<sup>1</sup> Max 3 CAT6 jacks per six port

OB-1-SP



OB-1-SH



OB-1-SP-6PORT



OB-1-SH-6PORT



## BOX SPECIFICATIONS

- Cover is 6 7/8" L x 5 11/16" W
- Overall height with box is 3 5/8" minimum depth can be adjusted upwards of 1 3/4"
- Box dimensions are 5 1/4" L x 4 3/4" W (the cover hangs over more on one side of the box than the other)


## FEATURES & BENEFITS

- Intertek **IP66 RATED** BOX (when in closed position)
- UL Listed Receptacle: E60120
- Tamper Proof opening** (with hex key option)
- Gangable**
- Includes **weather resistant** U.L. listed receptacle
- Patent protected**
- Stainless Steel #316: increases general corrosion resistance, improves resistance to pitting from chloride ion solutions, and provides increased strength at elevated temperatures.


# Desktop Boxes

24 >>>>>>

LEW ELECTRIC FITTINGS COMPANY  
For more information, call 630-665-2075  
www.lewelectric.com

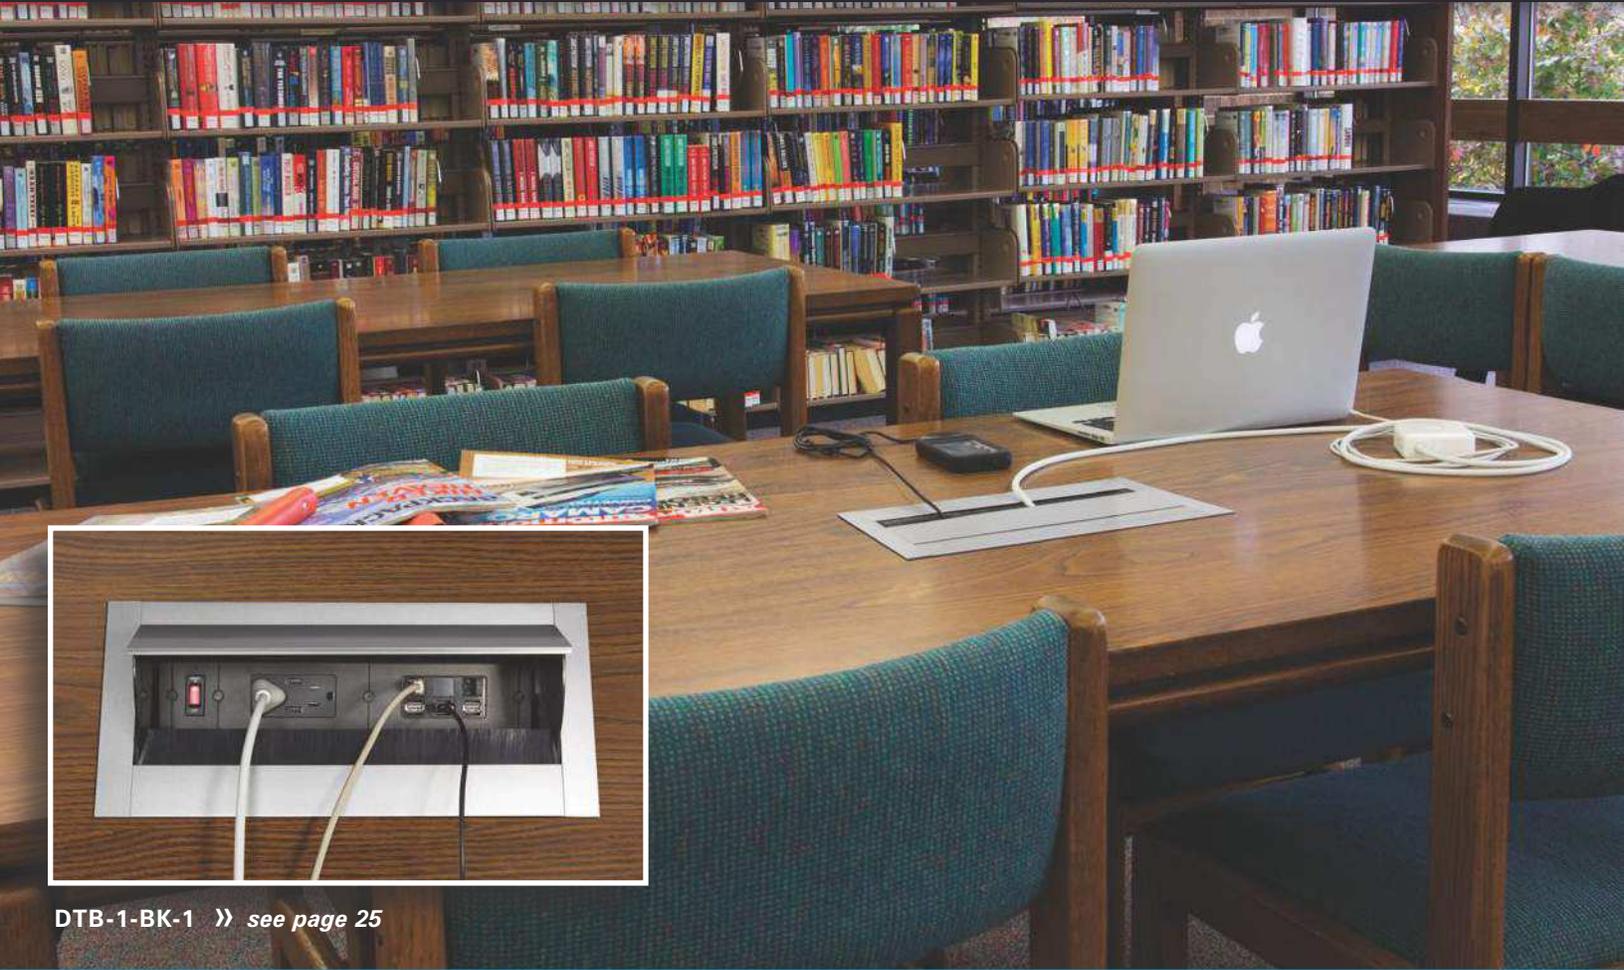

DTB-1-BK-1 >> see page 25

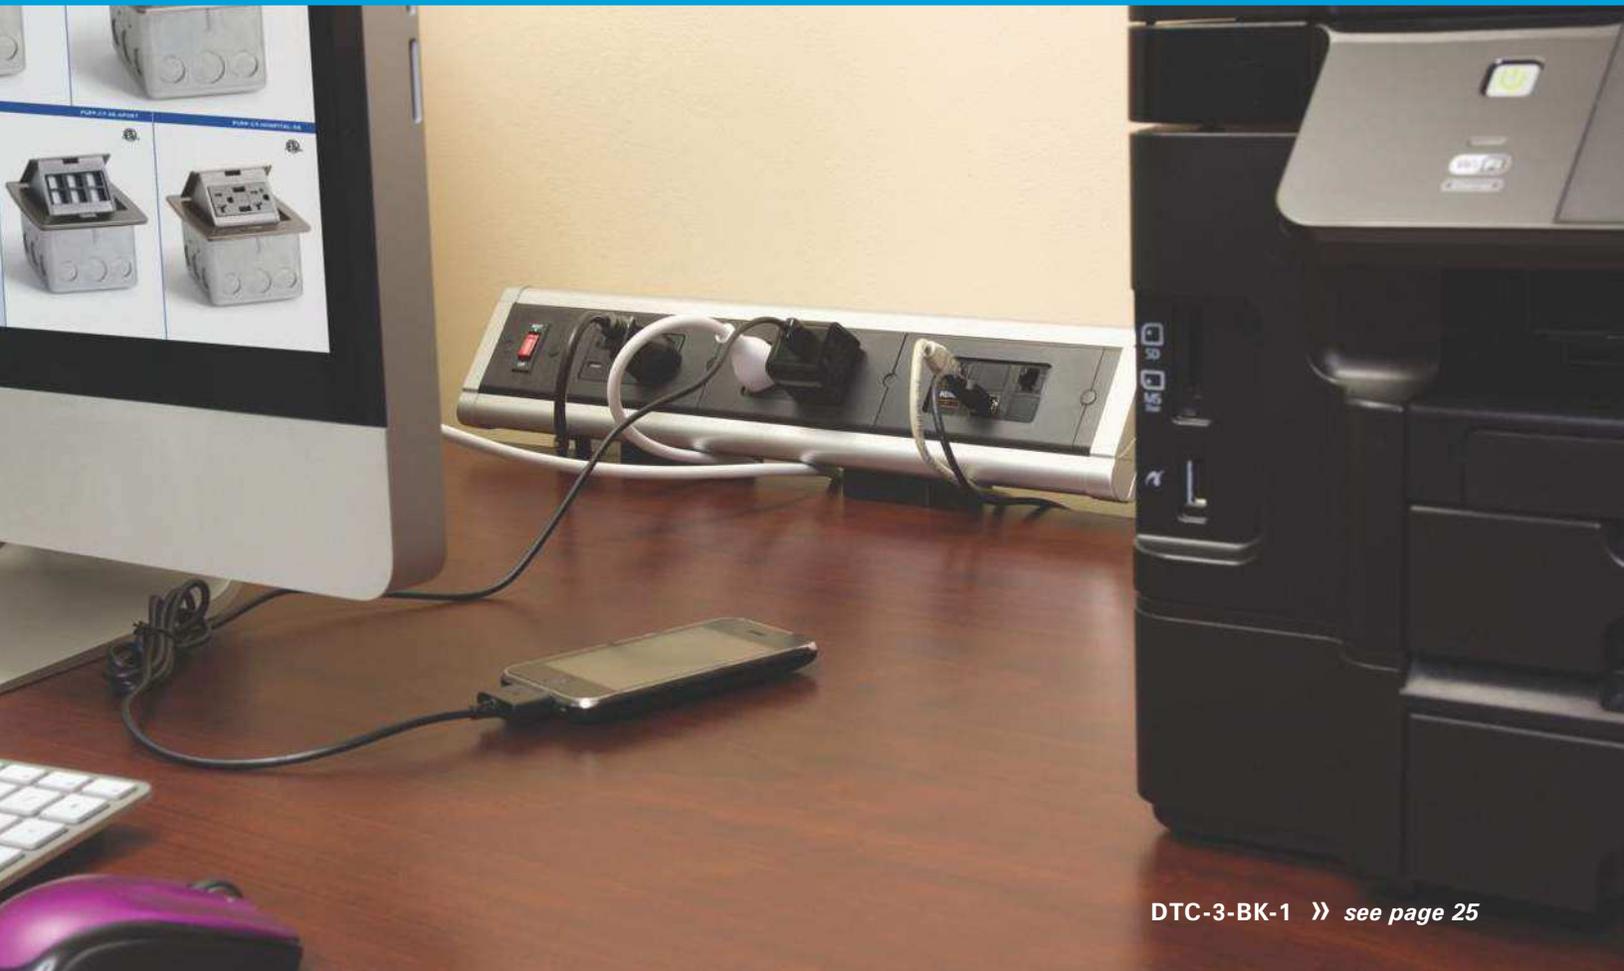

DTC-3-BK-1 >> see page 25

# DESKTOP BOXES

CATALOG #	DESCRIPTION
DTB-1-BK-1 ③	Pop-up desktop box includes 15 AMP (TR) duplex power/ 2USB receptacle & 6 port Comm./Data device »»» 14" L x 6 1/4" W x 5 1/8" H
DTB-3-BK-1 ③	Clamped desktop box includes 15 AMP (TR) decora receptacle & 6 port Comm./Data device »»» 12 5/8" L x 3 1/4" W x 3 1/4" H
DTC-3-BK-1 ③	Clamped desktop box includes 15 AMP (TR) decora receptacles & 6 port Comm./Data device »»» 17 1/4" L x 3 1/4" W x 3 1/4" H
DTD-2-BK-1 ③	Desktop box includes 15 AMP (TR) duplex power/ 2USB receptacle & 6 port Comm./Data device »»» 12 5/8" L x 3 1/4" W x 3 1/4" H
DTF-2-BK-3 ③	Desktop box includes 15 AMP (TR) duplex power/ 2USB receptacles & 6 port Comm./Data device »»» 17 1/4" L x 3 1/4" W x 3 1/4" H
PUFP-CT-B-2USB	Brass, pop out counter top plate assembly, with 15 AMP (TR) duplex power/ 2USB receptacle
PUFP-CT-BK-2USB	Black, pop out counter top plate assembly, with 15 AMP (TR) single power/ 2USB receptacle
PUFP-CT-SS-6PORT ③	Stainless Steel, pop out counter top plate assembly, with 6 port Comm./Data device
BTK-6PB ② ③	Black 6 port Comm./Data device (max 3 CAT6 jacks)
L310-106BK ① ②	Black keystone jack; CAT3
L310-110BK ① ②	RJ45 Black CAT5E keystone jack; for internet or telephone
L310-420BK ① ②	Blank Black keystone cover
L310-HDMI-BK ① ②	HDMI Black keystone jack
L310-USB-BK ① ②	USB Black keystone jack <i>** Part #BTK-6PB, black 6 port device, will accommodate three USB keystone jacks in one row only.</i>

- ① All keystone jacks are designed to be connected to plugs on both sides and not hard wired in the back
- ② Only for use with desktop box series
- ③ Max 3 CAT6 jacks per six port

»»» All desktop boxes are UL listed #E363978

<p><b>DTB-1-BK-1</b></p>  <p>UL US</p>			<p><b>DTB-3-BK-1</b></p>  <p>UL US</p>		<p><b>DTC-3-BK-1</b></p>  <p>UL US</p>	
			<p><b>DTD-2-BK-1</b></p>  <p>UL US</p>		<p><b>DTF-2-BK-3</b></p>  <p>UL US</p>	
<p><b>PUFP-CT-B-2USB</b></p>  <p>ETL US</p>		<p><b>PUFP-CT-BK-2USB</b></p>  <p>ETL US</p>		<p><b>PUFP-CT-SS-6PORT</b></p>  <p>ETL US</p>		
			<p><b>BTK-6PB</b></p>  <p>RU US</p>		<p><b>L310-106BK</b></p>  <p>RU US</p>	
			<p><b>L310-110BK</b></p>  <p>RU US</p>			
			<p><b>L310-420BK</b></p>  <p>RU US</p>		<p><b>L310-HDMI-BK</b></p>  <p>RU US</p>	
					<p><b>L310-USB-BK</b></p>  <p>RU US</p>	

See pages 10-13 for a wide range of additional styles and colors of PUPF Pop-up Counter Top Boxes.

# PVC Box & Accessories

CATALOG #	DESCRIPTION	DIMENSIONS		INTERIOR CAPACITY
		A	B	
FB	Round PVC box with (2) 3/4" hubs, (2) 1" hubs, (2) 3/4" reducers, (4) 1/2" reducers, <b>ADAPTER RING NOT INCLUDED.</b>	5"	6"	90 Cu. In. (15.5/In.)
FBKIT	Round PVC box with (2) 3/4" hubs, (2) 1" hubs, (2) 3/4" reducers, (4) 1/2" reducers, <b>ADAPTER RING INCLUDED.</b>	5"	6"	90 Cu. In. (15.5/In.)
CATALOG #	DESCRIPTION			
FB-DIV	Divider for FB & FBKIT floor boxes			
LRA-U	Leveling ring for FB & FBKIT			
PUFP-LRA	Leveling ring for PUFP plates			

>>>> UL listing #514C

## Non-Metallic Covers

CATALOG #	DESCRIPTION
PFC-B ① ②	Brown plastic flanged cover, with single flip lid & duplex mounting plate
PFC-E ① ②	Ebony plastic flanged cover, with single flip lid & duplex mounting plate
PFC-G ① ②	Gold plastic flanged cover, with single flip lid & duplex mounting plate
PFC-S ① ②	Gray plastic flanged cover, with single flip lid & duplex mounting plate
PFC-T ① ②	Tan plastic flanged cover, with single flip lid & duplex mounting plate

① Add **-GFI** for GFI/decora mount; ② Add **-TEL** for single receptacle/data

>>>> All covers listed above are 5 3/4"; UL listing #514C

FB



FB-DIV



LRA-U



PUFP-LRA

PFC-B

PFC-E

PFC-G

PFC-S

PFC-T



# PVC Metal Covers

CATALOG #	DESCRIPTION
PUFP-B ① ②	6" Brass pop out floor plate with with 15 AMP (TR) GFI receptacle
PUFP-BC ① ②	6" Brass pop out floor plate with 6 port Comm./Data device (max 3 CAT6 jacks)
PUFP-BD ① ②	6" Brass pop out floor plate with 15 AMP (TR) decora receptacle
PUFP-S ① ②	6" Stainless steel pop out floor plate with with 15 AMP (TR) GFI receptacle
PUFP-SC ① ②	6" Stainless steel pop out floor plate with 6 port Comm./Data device (max 3 CAT6 jacks)
PUFP-SD ① ②	6" Stainless steel pop out floor plate with 15 AMP (TR) decora receptacle
TCP-1	Brass flanged cover, with 2" – 1/2" combo plug for Comm./Data. or single receptacle
TCP-1-NS	Nickel Silver flanged cover, with 2" – 1/2" combo plug for Comm./Data. or single receptacle
TCP-1-3/4"	Brass flanged cover, with 2" – 3/4" combo plug for Comm./Data. or single receptacle
TCP-1-1"	Brass flanged cover, with 2" – 1" combo plug for Comm./Data. or single receptacle
TCP-1-PC	Brass flanged cover, with 2" – 1/2" combo plug for Comm./Data. or single recept., & (2) 1/2" plugs for Comm./Data
TCP-2	Brass flanged cover, with (2) 1 1/2", screw plugs for duplex power or Comm./Data
TCP-2-A	Aluminum flanged cover, with (2) 1 1/2", screw plugs for duplex power or Comm./Data
TCP-2-NS	Nickel Silver flanged cover, with (2) 1 1/2", screw plugs for duplex power or Comm./Data
TCP-2-LR	Seamless Brass flanged cover, with dual flip lid and duplex mounting plate
TCP-2-LR-A	Seamless Aluminum flanged cover, with dual flip lid and duplex mounting plate
TCP-2-PC	Brass flanged cover, with (2) 1 1/2" screw plugs for duplex power or Comm./Data., & (2) 1/2" plugs for Comm./Data
TCP-2-PC-A	Aluminum flanged cover, with (2) 1 1/2" screw plugs for duplex power or Comm./Data., & (2) 1/2" plugs for Comm./Data

>>>> All covers 5 3/4" except: ① 6"; ② Requires PUFP-LRA to mount to FB box  
 >>>> UL recognized components: PUFP series UL recognized 498; ETL listed P63  
 >>>> For Replacement Plugs, see page 38






CF10C » see page 29

# ACCESS Floorboxes


RF9C & RF10C  
 CSA #79115

**THE CF9C SERIES BOX** is a dual service floor box for use with conduit in a **poured concrete floor**. The box is constructed of 16 ga. galvanized steel and comes complete with 1/4" cast aluminum cover assembly. Boxes are shipped with disposable sheet metal cover to protect box during concrete pour. Box supplied with two 1/2-3/4" combination conduit knockouts each end for conduit feed and complete with four adjustable legs for pre-pour adjustment. Standard boxes supplied with power plates and data/communication plates punched to accept specified devices (see below).

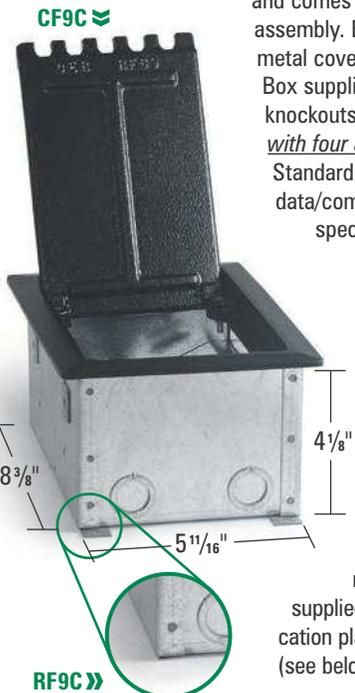

**THE RF9C SERIES BOX** is a dual service **raised floor box**. The box is constructed of 16 Ga. Galvanized steel and is supplied complete with 1/4" cast aluminum cover assembly. Box supplied with two 1/2-3/4" combination conduit knockouts at each end (does not include 4 adjustable legs). RF9 series access floor boxes are constructed with multiple compartments to suit application. Standard boxes supplied with power plates and data/communication plates punched to accept specified devices (see below).

**THE CF10C SERIES BOX** is a large capacity dual service floor box for use with conduit in a **poured concrete floor**. The box is constructed of 16 ga. galvanized steel and comes complete with a 1/4" cast aluminum cover assembly. Boxes are shipped with disposable sheet metal cover to protect box during concrete pour. Box supplied with two 1/2-3/4" combination conduit knockouts each end for conduit feed and complete with four adjustable legs for pre-pour adjustment. Standard boxes supplied with power plates and data/communication plates punched to accept specified devices (see below).

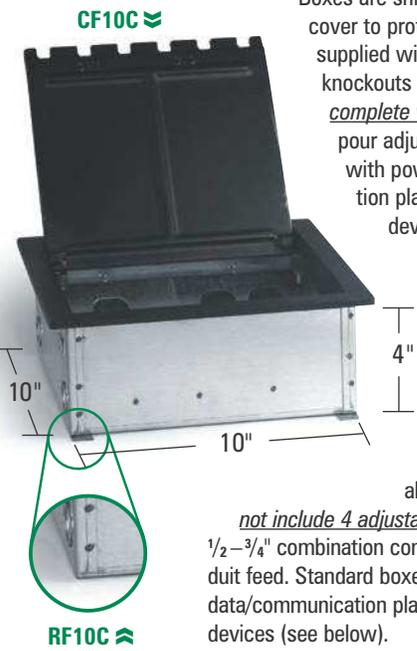

**THE RF10C SERIES BOX** is a large capacity dual service floor box for use in a **raised floor**. The box is constructed of 16 ga. galvanized steel and comes complete with 1/4" cast aluminum cover assembly (does not include 4 adjustable legs). Box supplied with two 1/2-3/4" combination conduit knockouts each end for conduit feed. Standard boxes supplied with power plates and data/communication plates punched to accept specified devices (see below).

## Power Device Plate Specifications

Receptacles are not normally supplied with boxes, contact factory for pricing with details of any receptacles that are required to be supplied with boxes.

- |                           |                         |
|---------------------------|-------------------------|
| 1 = 1 std duplex cut out  | 3 = 1 "Decora" cut out  |
| 2 = 2 std duplex cut outs | 4 = 2 "Decora" cut outs |

**Note:** Decora cut outs measure 1.3125" x 2.66"

## Power Device Plate Specifications

Receptacles are not normally supplied with boxes, contact factory for pricing with details of any receptacles that are required to be supplied with boxes.

- |                           |                           |
|---------------------------|---------------------------|
| 1 = 1 std duplex cut out  | 5 = 3 std duplex cut outs |
| 2 = 2 std duplex cut outs | 6 = 4 std duplex cut outs |
| 3 = 1 "Decora" cut out    | 7 = 3 "Decora" cut outs   |
| 4 = 2 "Decora" cut outs   | 8 = 4 "Decora" cut outs   |

**Note:** Decora cut outs measure 1.3125" x 2.66"

## Tel/Data Device Plate Specifications

Receptacles are not normally supplied with boxes, contact factory for pricing with details of any receptacles that are required to be supplied with boxes.

- |                         |                       |                       |
|-------------------------|-----------------------|-----------------------|
| A = 1 "Decora" cut out  | C = 1 "RJ45" cut out  | E = 3 "RJ45" cut outs |
| B = 2 "Decora" cut outs | D = 2 "RJ45" cut outs | F = 4 "RJ45" cut outs |

**Note:** Decora cut outs measure 1.3125" x 2.66"; RJ45 cut outs measure .765" x .585"

## Tel/Data Device Plate Specifications

Receptacles are not normally supplied with boxes, contact factory for pricing with details of any receptacles that are required to be supplied with boxes.

- |                         |                       |                         |
|-------------------------|-----------------------|-------------------------|
| A = 1 "Decora" cut out  | E = 3 "RJ45" cut outs | J = 7 "RJ45" cut outs   |
| B = 2 "Decora" cut outs | F = 4 "RJ45" cut outs | K = 8 "RJ45" cut outs   |
| C = 1 "RJ45" cut out    | G = 5 "RJ45" cut outs | M = 3 "Decora" cut outs |
| D = 2 "RJ45" cut outs   | H = 6 "RJ45" cut outs | P = 4 "Decora" cut outs |

**Note:** Decora cut outs measure 1.3125" x 2.66"; RJ45 cut outs measure .765" x .585"

## Standard Ordering Specifications

- Specify **box type** [CF9C]
- Specify **power device plate** [e.g. CF9C2 = 2 std duplex cut outs.]
- Specify **Tel/Data device plates** [e.g. CF9C2C = 2 std duplex cut outs for power, 1 RJ45 for Tel/Data.]

## Standard Ordering Specifications

- Specify **box type** [CF10C]
- Specify **power device plate** [e.g. CF10C6 = 4 std duplex cut outs.]
- Specify **Tel/Data device plates** [e.g. CF10C6BD = 4 duplex cut outs for power, 2 Decora & 2 RJ45 for Tel/Data.]

## 1101 Rectangular Boxes—Covers & Flanges

CATALOG #	DESCRIPTION
1101-SMB	One gang, deep stamped steel floor box »»» 3 7/8" H x 4 13/16" L x 4 13/16" W; 50.3 Cu. In.
1102-SMB	Two gang, deep stamped steel floor box »»» 3 7/16" H x 7 7/8" L x 4 13/16" W; 48.5 Cu. In. per gang
1103-SMB	Three gang, deep stamped steel floor box »»» 3 3/8" H x 11 1/16" L x 4 11/16" W; 38.3 Cu. In. per gang
SH-1101-SMB	One gang, shallow stamped steel floor box »»» 2 13/16" H x 4 13/16" L x 4 13/16" W; 31.5 Cu. In.
SH-1102-SMB	Two gang, shallow stamped steel floor box »»» 2 9/16" H x 7 7/8" L x 4 13/16" W; 33.5 Cu. In. per gang
SH-1103-SMB	Three gang, shallow stamped steel floor box »»» 2 15/32" H x 11 1/16" L x 4 11/16" W; 25.5 Cu. In. per gang
1101-DBE ① ②	One gang, brass frame »»» 4 5/16" L x 3 11/32" W
1102-DBE ① ②	Two gang, brass frame »»» 6 3/8" L x 4 3/8" W
1103-DBE ① ②	Three gang, brass frame »»» 9 5/16" L x 4 5/16" W

① Add -A for Aluminum tile frame; ② Add -B for Brass tile frame

>>>> All boxes UL listing #514A

>>>> Tile frames not included with stamped steel floor box. All tile frames 5/8" overall height

>>>> All boxes pre-pour adjustment of 2 1/4" and after pour adjustment 1/2"

>>>> Knockouts: Deep – Sides and Bottom: 3/4", 1", 1 1/4"; Shallow – Sides: 1/2" and 3/4"; Bottom: 3/4", 1" and 1 1/4"

1101-SMB



1102-SMB



1103-SMB



SH-1101-SMB



SH-1102-SMB




SH-1103-SMB




1101-DBE-B



1102-DBE-A

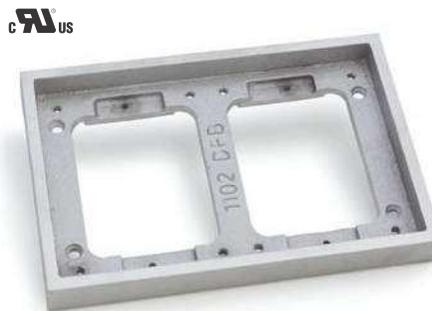

1103-DBE-B

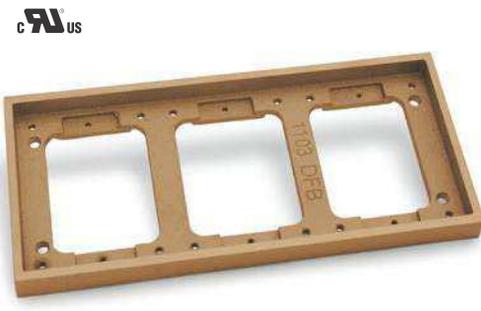

# 1101 Rectangular Boxes—Covers & Flanges

CATALOG #	DESCRIPTION
6304-DFB-1	Brass, hinged 2 7/8" x 3 7/8" cover (1/4" thick) for duplex
6304-DFB-1-A	Aluminum, hinged 2 7/8" x 3 7/8" cover (1/4" thick) for duplex
6304-DFB-1-TEL	Brass, hinged 2 7/8" x 3 7/8" cover (1/4" thick) for Comm./Data
6304-DFB-1-TEL-A	Aluminum, hinged 2 7/8" x 3 7/8" cover (1/4" thick) for Comm./Data
6304-DFB-1-GFI	Brass, hinged 2 7/8" x 3 7/8" cover (1/4" thick) for GFI or decora receptacle
6304-DFB-1-GFI-A	Aluminum, hinged 2 7/8" x 3 7/8" cover (1/4" thick) for GFI or decora receptacle
6304-DFB-LR	Brass, dual hinged 2 7/8" x 3 7/8" cover (1/4" thick) for duplex
6304-DFB-LR-A	Aluminum, dual hinged 2 7/8" x 3 7/8" cover (1/4" thick) for duplex
6304-DP	Brass, 2 7/8" x 3 7/8" cover (1/8" thick) with (2) 1 1/2" screw plugs for duplex
6304-DP-A	Aluminum, 2 7/8" x 3 7/8" cover (1/8" thick) with (2) 1 1/2" screw plugs for duplex
6304-S	Brass, 2 7/8" x 3 7/8" cover (1/8" thick) with 2" - 1/2" combo plug for Comm./Data
6304-S-A	Aluminum, 2 7/8" x 3 7/8" cover (1/8" thick) with 2" - 1/2" combo plug for Comm./Data
CF-1101-DFB	Single gang Brass carpet flange, 5 11/32" x 6 1/4"
CF-1101-DFB-A	Single gang Aluminum carpet flange, 5 11/32" x 6 1/4"
CF-1102-DFB	Two gang Brass carpet flange, 6 1/4" x 8 1/4"
CF-1102-DFB-A	Two gang Aluminum carpet flange, 6 1/4" x 8 1/4"
CF-1103-DFB	Three gang Brass carpet flange, 6 1/4" x 11 1/8"
CF-1103-DFB-A	Three gang Aluminum carpet flange, 6 1/4" x 11 1/8"

>>>> UL recognized components

>>>> For Replacement Plugs, see page 38

6304-DFB-1



6304-DFB-1-A



6304-DFB-LR



6304-DFB-LR-A



6304-DP



6304-DP-A



6304-S



6304-S-A



CF-1101-DFB



CF-1101-DFB-A




CF-1102-DFB



CF-1102-DFB-A



CF-1103-DFB

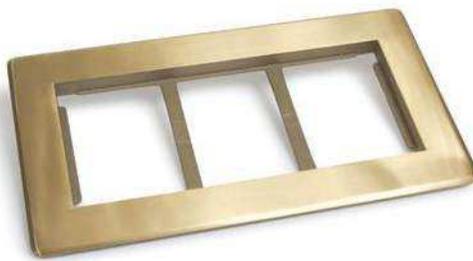

CF-1103-DFB-A



## 1101 Rectangular Boxes—Fully Adjustable

CATALOG #	DESCRIPTION	DIMENSIONS			ADJUST AFTER	INTERIOR CAPACITY	CONDUIT OPENINGS	MAX TAP
		H	L	W				
1101-58 ①	Deep, single gang cast box <i>Fully adjustable</i>	3 3/4"	4 1/4"	3 3/8"	3/8"	13 Cu. In. (Min)	Sides (4) 3/4"	1 1/4"
1102-58 ①	Deep, two gang cast box (partitioned), <i>Fully adjustable</i>	3 3/4"	6 3/8"	4 3/8"	3/8"	26 Cu. In. (Min) (13 Cu. In./Gang)	Sides (6) 3/4"	1 1/4"
1103-58 ①	Deep, three gang cast box (partitioned), <i>Fully adjustable</i>	3 3/4"	9 1/4"	4 5/16"	3/8"	40 Cu. In. (Min) (13 Cu. In./Gang)	Sides (8) 3/4"	1 1/4"

① Add -A for Aluminum finish

>>>> All boxes UL listing #514A, #489H

1101-58



1102-58-A



1103-58



## 1101 Rectangular Boxes—Semi Adjustable

CATALOG #	DESCRIPTION	DIMENSIONS			ADJUST BEFORE	INTERIOR CAPACITY	CONDUIT OPENINGS	MAX TAP
		H	L	W				
SH-1101-58 ①	Shallow, single gang cast box <i>Semi adjustable</i>	2 1/4"	4 1/4"	3 3/8"	1"	16 Cu. In.	Sides (4) 3/4"	1"
SH-6262-58 ①	Shallow, two gang cast box (partitioned), <i>Semi adjustable</i>	2 1/4"	6 3/8"	4 3/8"	1"	25 Cu. In. (12.5 Cu. In./Gang)	Sides (6) 3/4"	1"
SH-6263-58 ①	Shallow, three gang cast box (partitioned), <i>Semi adjustable</i>	2 1/4"	9 1/4"	4 5/16"	1"	50 Cu. In. (16.5 Cu. In./Gang)	Sides (8) 3/4"	1"

① Add -A for Aluminum finish

>>>> All boxes UL listing #514A, #489H

SH-1101-58



SH-6262-58-A



SH-6263-58



# 1101 Rectangular Boxes—Covers & Flanges

CATALOG #	DESCRIPTION
6304-DFB-1	Brass, hinged 2 7/8" x 3 7/8" cover (1/4" thick) for duplex
6304-DFB-1-A	Aluminum, hinged 2 7/8" x 3 7/8" cover (1/4" thick) for duplex
6304-DFB-1-TEL	Brass, hinged 2 7/8" x 3 7/8" cover (1/4" thick) for Comm./Data
6304-DFB-1-TEL-A	Aluminum, hinged 2 7/8" x 3 7/8" cover (1/4" thick) for Comm./Data
6304-DFB-1-GFI	Brass, hinged 2 7/8" x 3 7/8" cover (1/4" thick) for GFI or decora receptacle
6304-DFB-1-GFI-A	Aluminum, hinged 2 7/8" x 3 7/8" cover (1/4" thick) for GFI or decora receptacle
6304-DFB-LR	Brass, dual hinged 2 7/8" x 3 7/8" cover (1/4" thick) for duplex
6304-DFB-LR-A	Aluminum, dual hinged 2 7/8" x 3 7/8" cover (1/4" thick) for duplex
6304-DP	Brass, 2 7/8" x 3 7/8" cover (1/8" thick) with (2) 1 1/2" screw plugs for duplex
6304-DP-A	Aluminum, 2 7/8" x 3 7/8" cover (1/8" thick) with (2) 1 1/2" screw plugs for duplex
6304-S	Brass, 2 7/8" x 3 7/8" cover (1/8" thick) with 2" - 1/2" combo plug for Comm./Data
6304-S-A	Aluminum, 2 7/8" x 3 7/8" cover (1/8" thick) with 2" - 1/2" combo plug for Comm./Data
CF-1101-DFB	Single gang Brass carpet flange, 5 11/32" x 6 1/4"
CF-1101-DFB-A	Single gang Aluminum carpet flange, 5 11/32" x 6 1/4"
CF-1102-DFB	Two gang Brass carpet flange, 6 1/4" x 8 1/4"
CF-1102-DFB-A	Two gang Aluminum carpet flange, 6 1/4" x 8 1/4"
CF-1103-DFB	Three gang Brass carpet flange, 6 1/4" x 11 1/8"
CF-1103-DFB-A	Three gang Aluminum carpet flange, 6 1/4" x 11 1/8"

UL recognized components  
 For Replacement Plugs, see page 38



## 32 Round Boxes, Adjustable


CATALOG #	DESCRIPTION	DIMENSIONS		ADJUST BEFORE	ADJUST AFTER	INTERIOR CAPACITY	CONDUIT OPENINGS	MAX TAP
		A	B					
532-58 ①	Deep, cast box, fully adjustable	4 1/4"	4 3/16"	X	3/8"	32 Cu. In.	Sides (4) 3/4"	1 1/4"
532-SB-58 ①	Shallow, cast box, fully adjustable	4 1/4"	3 5/16"	X	3/8"	24 Cu. In.	Sides (4) 3/4"	1 1/4"
532-SMB	Deep Stamped Steel, fully adjustable	4 11/16"	3 3/4"	2 1/4"	1/2"	57 Cu. In.	1/2", 3/4", 1", 1 1/4"	none
532-SMB-SB ③	Shallow, Stamped Steel, fully adjustable	4 11/16"	2 13/16"	2 1/4"	1/2"	43.8 Cu. In.	Sides (6) 1/2", (4) 3/4" Bottom (3) 1/2", (2) 3/4"	none
CATALOG #	DESCRIPTION	DIMENSIONS		ADJUST BEFORE	ADJUST AFTER	INTERIOR CAPACITY	CONDUIT OPENINGS	MAX TAP
		A	B					
332-58 ①	Shallow, cast box, semi adjustable	4 1/4"	2 1/8"	1"	X	12 Cu. In.	Sides (4) 3/4"	1"
MW-332-58 ①	Core drill cast box, semi adjustable	4 1/4"	2 1/8"	1/2"	X	12 Cu. In.	Sides (4) 3/4" ②	1"

① Add -A for Aluminum finish; ② additional 3/4" conduit opening in bottom of box;


③ additional 3/4" (2) & 1/2" (2) conduit openings in bottom

>>>> All boxes UL listing #514A, #489H

532-SMB

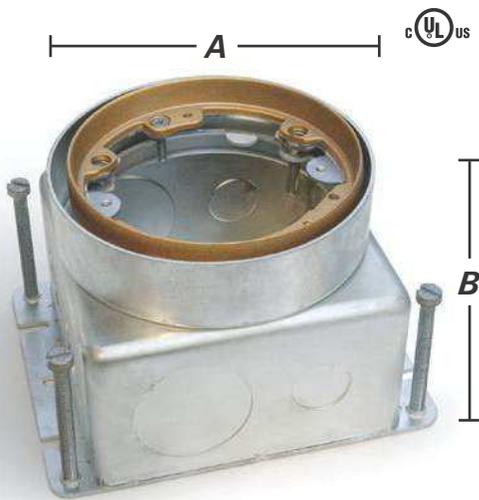

532-SMB-SB

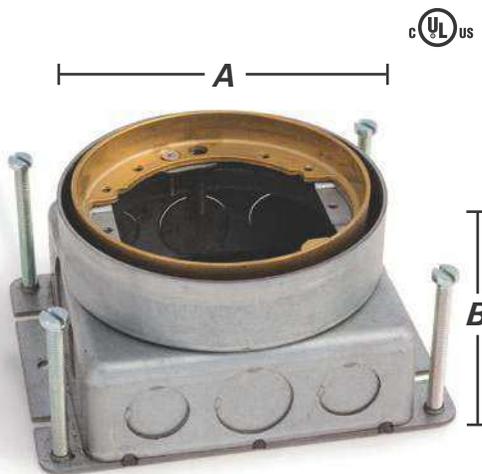

532-58



532-SB-58



332-58



MW-332-58



# 32 Round Box Covers

CATALOG #	DESCRIPTION
DFB-LR	Brass, dual hinged cover (1/4" thick) for duplex
DFB-LR-A	Aluminum, dual hinged cover (1/4" thick) for duplex
DFB-1	Brass, hinged cover (1/4" thick) for duplex
DFB-1-A	Aluminum, hinged cover (1/4" thick) for duplex
SCF-1 ①	5 1/4" Brass flange
SCF-1-A ①	5 1/4" Aluminum flange
TCP-1 ②	5 3/4" Brass flanged cover, with 2" - 1/2" combo plug for Comm./Data. or single receptacle
TCP-1-NS ②	5 3/4" Nickel Silver flanged cover, with 2" - 1/2" combo plug for Comm./Data. or single receptacle
TCP-2 ②	5 3/4" Brass flanged cover, with (2) 1 1/2", screw plugs for duplex power or Comm./Data
TCP-2-A ②	5 3/4" Aluminum flanged cover, with (2) 1 1/2", screw plugs for duplex power or Comm./Data
TCP-2-NS ②	5 3/4" Nickel Silver flanged cover, with (2) 1 1/2", screw plugs for duplex power or Comm./Data
TCP-2-LR ②	5 3/4" Seamless Brass flanged cover, with dual flip lid and duplex mounting plate
TCP-2-LR-A ②	5 3/4" Seamless Aluminum flanged cover, with dual flip lid and duplex mounting plate
523-DP	Brass, cover (1/8" thick) with (2) 1- 1/2" screw plugs for duplex
523-DP-A	Aluminum, cover (1/8" thick) with (2) 1- 1/2" screw plugs for duplex
523-DP-NS	Nickel Silver, cover (1/8" thick) with (2) 1- 1/2" screw plugs for duplex
524	Brass, cover (1/8" thick) with 2" - 1/2" combo plug for Comm./Data

>>>> All covers 4" except: ① 5 1/4"; ② 5 3/4"  
 >>>> UL recognized components  
 >>>> For Replacement Plugs, see page 38



# POKE THROUGHS

## STEP 1 » Choose Poke Through (MOI) or In Slab (MOI-SLB)



MOI



MOI-SLB

## STEP 2 » Choose Configuration\*

	<b>MOI-COMM10 »</b> Ten communication openings
	<b>MOI-DP1 »</b> Decora receptacle
	<b>MOI-DP1-COMM4 »</b> Decora receptacle & (4) communication openings
	<b>MOI-PASS-THROUGH »</b> 2.5" trade size circular opening
	<b>MOI-PWR2-COMM4 »</b> (2) single receptacle & (4) communication openings
	<b>MOI-PWR2-COMM4-DB15 »</b> (2) single receptacle & (4) communication openings & (1) DB-15 opening

	<b>MOI-PWR2-COMM5 »</b> (2) single receptacle & (5) communication openings
	<b>MOI-PWR2-COMM6 »</b> (2) single receptacle & (6) communication openings
	<b>MOI-PWR4 »</b> (4) single receptacle
	<b>MOI-PWR4-COMM4 »</b> (4) single receptacle & (4) communication openings
	<b>MOI-SYS-COMM »</b> Systems furniture communication-power & comm cabling

**EXAMPLE:**  
For Poke Through » MOI-COMM10  
For In Slab » MOI-SLB-COMM10

\*Configuration does not include communication components

## STEP 3 » Choose Finish



**Stainless Steel**  
Add: **-SS**



**Brass**  
Add: **-BR**




**Black\***  
Add: **-BK**

\*Black cover option available ONLY in Drop Cover lid

## STEP 4 » Choose Cover Type



**Threaded Security**  
Add: **-TSC**



**Hinged**  
Add: **-HC**



**Drop Cover**  
Add: **-DC**

**Threaded Coin**  
Add: **-TC**

## STEP 5 » Specify Slab Thickness

» Must specify when ordering to achieve proper collar size of threaded pipe

### EXAMPLE

**MOI-PWR4-COMM4-SS-HC-8**



(4) single receptacle & (4) communication openings

### Cover

- » Outer ring diameter = 6"
- » Inner ring diameter = 3 9/16"



### UL LISTINGS (POKE THROUGH ONLY)

- » UL listed 2-hour fire rating for US & Canada.
- » UL Electrical: E340490 (scrub test part of this #)
- » UL Fire: R21090
- » CSA #: 212271

# NOZZLES *FDN-300-A*

CATALOG #	DESCRIPTION	DIMENSIONS			STANDARD OPENINGS
		H	L	D	
FDN-300-A	Aluminum floor nozzle (Sand Casted Aluminum)	2 7/8"	4"	2 7/8"	3/4" (Also available in 1/2" or 1", please specify)
803-A ①	Blank nozzle plate				
804-A ①	Nozzle plate for duplex receptacle				
806-A ①	Nozzle plate for single receptacle or cable				
807-GFI-A ①	Nozzle plate for GFI receptacle				

① Each Floor Nozzle requires two plates.



# *FDN-200-A*

CATALOG #	DESCRIPTION	DIMENSIONS			STANDARD OPENINGS
		H	L	D	
FDN-200-A	Aluminum floor nozzle with partition (Die Cast Aluminum)	3"	4 3/4"	4 1/4"	(2) 3/4" (Threaded)
203-A ①	Blank nozzle plate				
204-A ①	Nozzle plate for duplex receptacle				
206-A ①	Nozzle plate for single receptacle or cable				
207-A ①	Nozzle plate for GFI receptacle				

① Each Floor Nozzle requires two plates.



# *FDN-100-A*

CATALOG #	DESCRIPTION	DIMENSIONS			STANDARD OPENINGS
		H	L	D	
FDN-100-A	Aluminum floor nozzle (Die Cast Aluminum) for up to (4) duplex receptacles (not included)	4 3/4"	4 1/4"	4 1/4"	1"
110-A ①	Nozzle plate will accommodate (2) duplex receptacles				
111-A ①	Nozzle plate will accommodate 30-50 AMP receptacle				
112-A ①	Blank nozzle plate				
113-GFI-A ①	Nozzle plate will accommodate (2) GFI receptacles				

① Each Floor Nozzle requires two plates.



# Replacement Plugs

CATALOG #	DESCRIPTION
6410-1/2 ①	Brass 2" - 1/2" combination plug
6410-3/4	Brass 2" - 3/4" combination plug
6410-1	Brass 2" - 1" combination plug
6207	Brass 2" close up plug
6208 ①	Brass 1/2" close up plug
6210 ①	Brass 3/4" close up plug
6211 ①	Brass 1" close up plug
6212 ①②	Brass 1 1/4" close up plug
6213 ①	Brass 1 1/2" close up plug (duplex covers)
6213-BP	Brass Plated 1 1/2" close up plug (for RRP-1-BP & SWB-1-BP ONLY)
6213-NP	Nickel Plated 1 1/2" close up plug (for RRP-1-NP & SWB-1-NP ONLY)
6214 ①	1 1/4" plug for RCFB series
6215	Brass 1 1/2" close up plug
6215-A	Aluminum 1 1/2" close up plug

① Add -A for Aluminum finish; ② Add -NS for Nickel Silver finish


>>>> Product photos not to scale

<p><b>6410-1/2</b></p> <p><b>FITS COVERS:</b> 6304-S 503 524 TCP-1</p> 	<p><b>6410-3/4</b></p> <p><b>FITS COVERS:</b> 6304-S-3/4" 524-3/4"</p> 	<p><b>6410-1</b></p> <p><b>FITS COVERS:</b> 6304-S-1" 524-1"</p> 	<p><b>6207</b></p> <p><b>FITS COVERS:</b> 504</p> 		
<p><b>6208</b></p> <p><b>FITS COVERS:</b> DFB-1-1/2" 6304-S 503 524 TCP-1</p> 	<p><b>6210</b></p> <p><b>FITS COVERS:</b> 6304-S-3/4" 524-3/4"</p> 	<p><b>6211</b></p> <p><b>FITS COVERS:</b> 6304-S-1" 524-1"</p> 	<p><b>6212</b></p> <p><b>FITS COVERS:</b> RRP/SWB-2 or -4</p> 		
<p><b>6213</b></p> <p><b>FITS COVERS:</b> 523-DP (812) 6304-DP (1101) TCP-2</p> 	<p><b>6213-BP</b></p> <p><b>FITS COVERS:</b> RRP-1-BP SWB-1-BP</p> 	<p><b>6213-NP</b></p> <p><b>FITS COVERS:</b> RRP-1-NP SWB-1-NP</p> 	<p><b>6214</b></p> <p><b>FITS COVERS:</b> RCFB-1 RCFB-2</p> 	<p><b>6215</b></p> <p><b>FITS COVERS:</b> PBR-SPB, RRP-2-SPB, RRP-4-SPB, RRP-6-SPB</p> 	<p><b>6215-A</b></p> <p><b>FITS COVERS:</b> PBR-SPA, RRP-2-SPA, RRP-4-SPA, RRP-6-SPA</p> 

# Low Volt

CATALOG #	DESCRIPTION
RRP-2-PQ	Quad port (max 2 CAT6 jacks per quad port)
L310-110AL	RJ45 almond CAT5E keystone jack; internet and phone
L310-140AL	RJ45 almond CAT6 keystone jack; internet and phone
L310-420AL	Blank almond keystone cover
L310-HDMI ①	HDMI white keystone jack
L310-USB ①	USB white keystone jack

① All keystone jacks are designed to be connected to plugs on both sides and not hard wired in the back

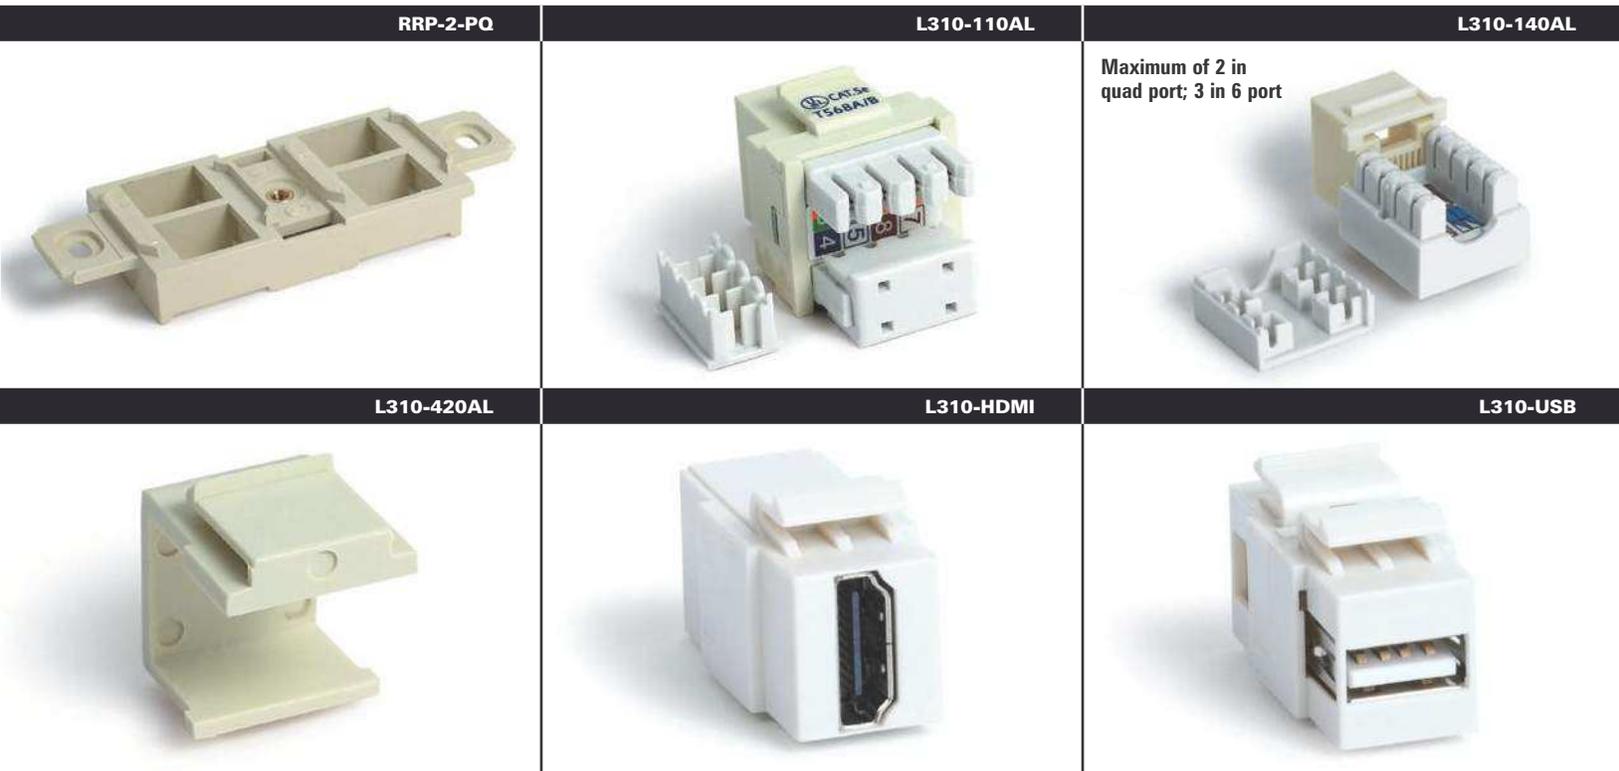

## Low Volt for Desktop Boxes only (see p. 25)

CATALOG #	DESCRIPTION
BTK-6PB ②	Black 6 port Comm./Data device (max 3 CAT6 jacks)
L310-106BK ① ②	Black keystone jack; CAT3
L310-110BK ① ②	RJ45 Black CAT5E keystone jack; for internet or telephone
L310-420BK ① ②	Blank Black keystone cover
L310-HDMI-BK ① ②	HDMI Black keystone jack
L310-USB-BK ① ②	USB Black keystone jack <i>** Part #BTK-6PB, black six port device, will accommodate three USB keystone jacks in one row only.</i>

① All keystone jacks are designed to be connected to plugs on both sides and not hard wired in the back.

② Only for use with desktop box series

>>>> All desktop boxes are UL listed #E363978



**Who We Are:** We are the worldwide leader in providing safe and innovative floor boxes for residential and commercial use, providing floor boxes for homes, churches, airports and sports stadiums. We provide a solution for electrical needs where wall boxes are insufficient.

**Guarantee:** Centrally located just outside of Chicago, Illinois, Lew Electric Fittings Company guarantees the fastest shipping and delivery in the market. We also provide full time experts at the factory to answer any questions regarding any floor box issue.

**Mission Statement:** Providing the power where power is needed!

**LEW ELECTRIC FITTINGS CO.**

371 Randy Road; Carol Stream, IL 60188

**PHONE:** 630-665-2075

**WWW.LEWELECTRIC.COM**