



**UPC Code:** 078477891889

Country Of Origin: Mexico

**NEMA:** 5-15R



# MT562-2SN

Lev-Lok Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Two Outlets Marked "Controlled", Tamper-Resistant, Smooth Face, 15 Amp, 125 Volt, Modular, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding - Green

Mating Lev-Lok Wiring Module Required for Use

The Lev-Lok® Modular Wiring Device System is engineered for fast and easy installation. These devices employ a simple twist and lock wiring module that ensures a safe, reliable connection while at the same time providing for extremely fast and easy installation. Lev-Lok brand wiring devices address the reliability and performance concerns of specification engineers without sacrificing the contractor's need for fast, easy installation.

#### **Technical Information**

AC Horsepower Ratings
Horsepower Rating: 1/2 HP

Electrical Specifications

Amperage: 15 A

Current Interrupting: Certified for current interrupting at full rated current Dielectric Voltage: Withstands 2000V

per UL498

**Grounding:** Self-Grounding

Pole: 2

Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Voltage: 125 VAC

Wire: 3

**Environmental Specifications** 

Operating Temperature: -40°C to 60°C

Material Specifications
Base Material: Nylon
Bushing: Solid Brass
Cover Material: Nylon
Ground Clips: Brass

Line Contacts: 0.040" Thick Solid Brass

Locking Pins: Solid Brass

Mounting Screws: Triple Combination

Head, Steel

Mounting Strap: Galvanized Steel Shutter Mechanism: Acetal

Mechanical Specifications

Product ID: Ratings are permanently

marked on device Termination: Modular

Product Features
Brand: Lev-Lok
Color: Green

**Controlled Outlets: 2** 

Device Type: Duplex Receptacle Outlet

**Feature:** Two Outlets Marked Controlled, Tamper-Resistant, Smooth

ontrolled, ran

Grade: Heavy-Duty Industrial

Specification Grade

**NEMA:** 5-15R

Standards and Certifications

**ANSI:** C-73


CSA C22.2 No. 42: File 152105

**NEMA:** WD-1 & WD-6

**NOM**: 057

UL Fed Spec WC-596: File E13399

**UL498:** File E13399 **Warranty:** 10-Year Limited

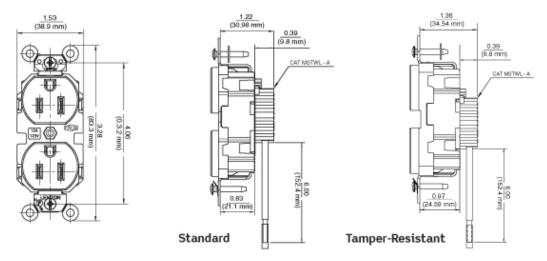

## SPECIFICATION SUBMITTAL

I	JOB NAME:	CATALOG NUMBERS:	Ξ
ı			
	JOB NUMBER:		

# Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

 $\label{eq:temperature} \textbf{Telephone: +1-800-323-8920} \cdot \textbf{FAX: +1-800-832-9538} \cdot \textbf{Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005}$ 

### Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

#### Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

## Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

### Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

