




Color: Ivory

UPC Code: 07847789158

Country Of Origin: Mexico



# MT562-2SI

## **Brand Features**

The Lev-Lok® Modular Wiring Device System is engineered for fast and easy installation. These devices employ a simple twist and lock wiring module that ensures a safe, reliable connection while at the same time providing for extremely fast and easy installation. Lev-Lok brand wiring devices address the reliability and performance concerns of specification engineers without sacrificing the contractor's need for fast, easy installation.

#### Item Description

Lev-Lok Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Two Outlets Marked "Controlled", Tamper-Resistant, Smooth Face, 15 Amp, 125 Volt, Modular, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding -

Ivory<br><br><strong>Mating Lev-Lok Wiring Module Required for Use</strong>

#### **Technical Information**

AC Horsepower Ratings Horsepower Rating: 1/2 HP

**Electrical Specifications** 

# Amperage: 15 A

Current Interrupting: Certified for current interrupting at full rated current Dielectric Voltage: Withstands 2000V per UL498 Grounding: Self-Grounding Pole: 2 Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current Voltage: 125 VAC

Wire: 3

Environmental Specifications Flammability: Rated V-2 per UL94 Operating Temperature: -40°C to 60°C

Material Specifications

Base Material: Nylon Bushing: Solid Brass Cover Material: Nylon Ground Clips: Brass Line Contacts: 0.040" Thick Solid Brass Locking Pins: Solid Brass Mounting Screws: Triple Combination Head, Steel Mounting Strap: Galvanized Steel Mechanical Specifications

Product ID: Ratings are permanently marked on device Termination: Modular

### **Product Features**

Color: Ivory

**Device Type:** Duplex Receptacle Outlet **NEMA:** 5-15R

Feature 4: Smooth Face


**Grade:** Heavy-Duty Industrial Specification Grade

Feature 2: Tamper-Resistant Feature: Two Outlets Marked Controlled

Brand: Lev-Lok

Standards and Certifications **ANSI:** C-73

CSA C22.2 No. 42: File 152105 NEMA: WD-1 & WD-6 NOM: 057 UL498: File E13399 UL Fed Spec WC-596: File E13399 Warranty: 10 Year Limited

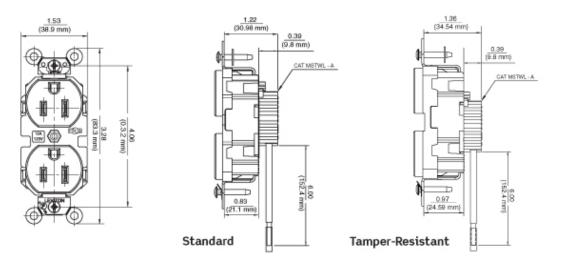

# SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
JOB NUMBER:		

# Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747 Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

# Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

## Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

## Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

# Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

