

# USB Charger/Duplex Tamper-Resistant Receptacles

## APPLICATION

The Leviton USB Charger/Duplex Tamper-Resistant Receptacles offer high power charging capabilities to get your electronic devices up and running fast! It features a smart chip that recognizes and optimizes the charging power of your device for fast and efficient charging. Strategically placed vertical USB Ports provides generous room to insert and maneuver charging cords and adds to the contemporary and aesthetically appealing design. Plus, adapter-free charging eliminates unsightly clutter contributing to a neat appearance on countertops, desktops or wherever you choose to charge.

## Residential and Commercial Applications

- Kitchens
- Bedrooms
- Home Offices
- Airport Lounges
- Salons and Spas
- Hotels, Meeting Rooms
- Office Cubicles
- College Dormitories
- Cafes, Coffee Houses, Restaurants

## Compatibility

Compatible with a wide range of electronic devices including, but not limited to, the following:

- iPad®
- iPhone®
- iPod®
- Tablets
- Mobile Phones
- BlackBerry®, Android Phones
- Windows® Phone by HTC
- Samsung Devices
- Nintendo 3DS™
- PlayStation® Vita
- Bluetooth™ Headsets
- Digital Cameras
- Kindle™, Nook e-readers
- GPS

## FEATURES AND BENEFITS

- Smart chip designed for recognizing and optimizing the charging requirements of individual electronic devices
- Two high-powered USB charging ports with 3.6 Amps of charging capacity
- Compatible with USB 2.0 electronic devices
- Two vertical USB ports are spaced to provide more room for maneuvering the cables
- 15A or 20A Tamper-Resistant Receptacles
- Fits in a standard wallbox, is compatible with standard wall-plates and can be multi-ganged with other standard devices
- Back and side wired



## SPECIFICATIONS

### Electrical

- Rating: 15A-125V; 20A-125V
- Horsepower Rating: 15A 1/2 HP; 20A 1 HP
- Grounding

### Mechanical

- Torque Range: 12-14 inch pounds
- Terminal Accom: 14-12 AWG
- Termination: Back & Side
- Terminal ID: Brass-Hot; Black-Hot; White-Neutral; Green-Gnd

### Environmental

- Operating Temperature: -10°C to 40°C

## AGENCY STANDARDS AND COMPLIANCE


- cCSAus listed
- NOM: 057
- FCC Part 15: Class B for Residential

## WARRANTY


Five-Year Limited Warranty

USB Charger/Duplex Tamper-Resistant Receptacles

**DIMENSIONAL DRAWINGS**

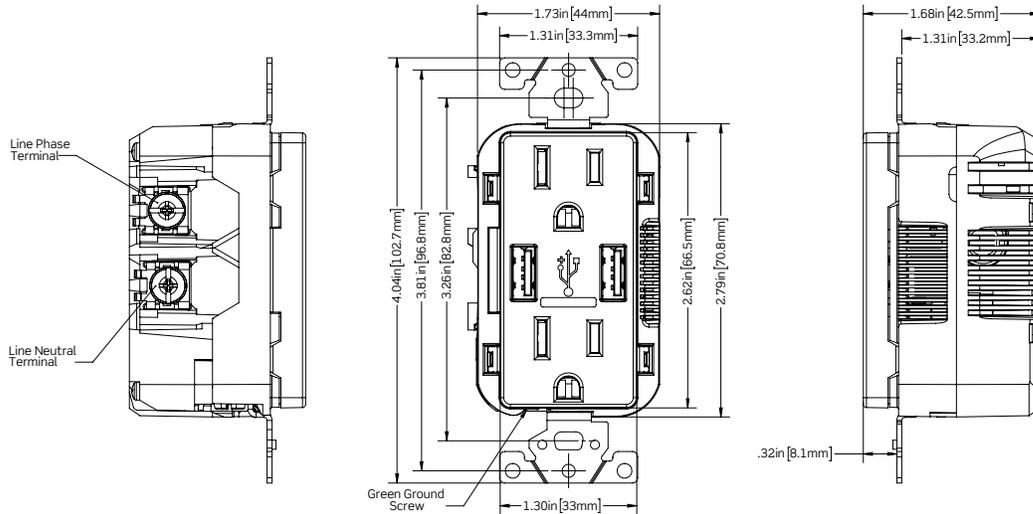

**WIRING DIAGRAMS**

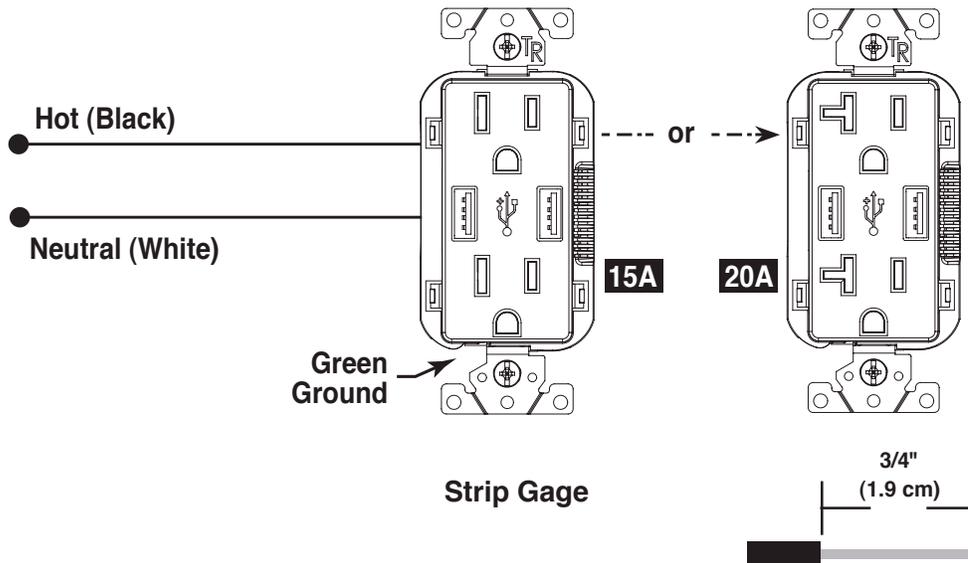

**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	CHARGING CAPABILITY	RATING	COLOR*
T5632	15A USB Charger/Duplex Tamper-Resistant Receptacle	3.6 AMP	15 AMP, 125V	W, I, T, GY, E, B
T5832	20A USB Charger/Duplex Tamper-Resistant Receptacle	3.6 AMP	20 AMP, 125V	W, I, T, GY, E

**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747-3138  
 Telephone: 1-800-323-8920 • Fax: 1-800-832-9538 • Tech Line: (8:30AM-7:00PM E.T. Monday-Friday): 1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 • Telephone: 1-800-469-7890 • Fax: 1-800-563-1853

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 • Tel. (+52) 55-5082-1040 • Fax. (+52) 5386-1797 • www.leviton.com.mx

Visit our website at [www.leviton.com](http://www.leviton.com)

© 2014 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.



G-9258/E14-dp