



New Construction Downlight

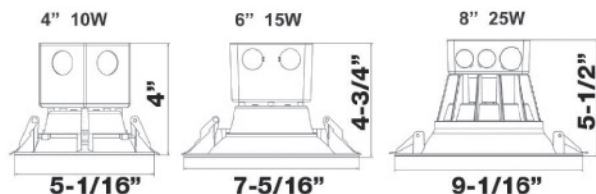

- Recessed New Construction Downlight
- Includes Integral 4" Junction Box
- Perfect for Residential & Commercial Applications
- Torsion Spring Brackets for Mounting to Sheetrock
- Aluminum Housing/Trim - Paintable
- Guaranteed Single Bin Color Consistency with Enhanced Illumination Uniformity
- TRIAC Dimming Technology
- Dimmable @120V - Down to 10%
- Compatible with Most LED Dimmers
- PF: 0.94
- Beam Angle: 95°
- Operating Temp: -31°F to 122°F
- 50,000 Hour LED Life Expectancy
- IP44 Wet Location Rated
- IC (Insulation Contact) Rated
- 5 Year Warranty

Cat. No.	Size	Trim Style	Color Temp	Watts	Delivered Lumens	Voltage	CRI	R9	Replaces Incandescent	Case Qty
72640	4"	Baffle	3000K	10	780	120-277	92	43	75W	12
72641	4"	Baffle	4000K	10	800	120-277	92	52	75W	12
72643	6"	Baffle	3000K	15	1020	120	93	42	100W	12
72644	6"	Baffle	4000K	15	1120	120	93	59	100W	12
72645	6"	Baffle	5000K	15	1130	120	93	58	100W	12
72653	8"	Baffle	3000K	25	1750	120-277	92	47	200W	6
72654	8"	Baffle	4000K	25	1900	120-277	92	63	200W	6
72655	8"	Baffle	5000K	25	1900	120-277	92	64	200W	6

New Construction Downlight

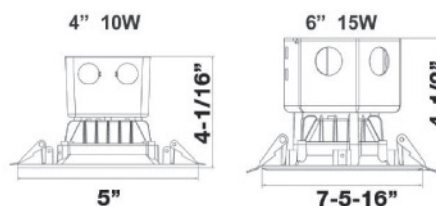

- Recessed Square New Construction Downlight
- Includes Integral 4" Junction Box
- Perfect for Residential & Commercial Applications
- Torsion Spring Brackets for Mounting
- Aluminum Housing/Trim - Paintable
- Guaranteed Single Bin Color Consistency with Enhanced Illumination Uniformity
- TRIAC Dimming Technology
- Dimmable Down to 10%
- Compatible with Most LED Dimmers
- Beam Angle: 95°
- Input Voltage: 120VAC
- Operating Temp: -31°F to 122°F
- 50,000 Hour LED Life Expectancy
- IP44 Wet Location Rated
- IC (Insulation Contact) Rated
- 5 Year Warranty

Cat. No.	Size	Trim Style	Color Temp	Watts	Delivered Lumens	Voltage	CRI	R9	Replaces Incandescent	Case Qty
72646	4"	Smooth	3000K	10	700	120-277	92	42	75W	12
72647	4"	Smooth	4000K	10	700	120-277	92	55	75W	12
72650	6"	Smooth	3000K	15	937	120	90	38	100W	12
72651	6"	Smooth	4000K	15	937	120	90	58	100W	12
72652	6"	Smooth	5000K	15	937	120	90	59	100W	12