



Catalog Number	11106
UPC Number	60198611106
Description	Non-Insulated Ring Terminals 4 AWG



Features


- Non-Insulated
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Brazed seam prevents splitting under maximum pressure
- Wire range stamped on the surface for easy interpretation

General

Insulation Type	None
Material	Copper
Finish	Electro-tin plated
Color	N/A
Wire Range	4 AWG
Stud Size	#10

Dimension Information

L Inches (mm)	1.307
W Inches (mm)	0.866
D Inches (mm)	0.453
d1 Inches (mm)	0.303
d2 Inches (mm)	0.209
E Inches (mm)	0.472
F Inches (mm)	0.594
T Inches (mm)	0.067

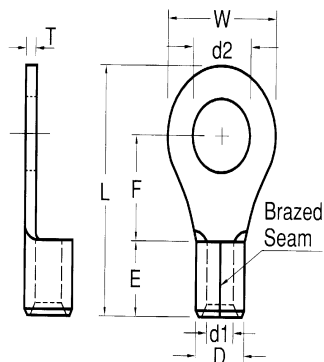

Specifications

Temperature Rating	150°C
Voltage Rating	600 V
Flammability Rating	N/A
Amp Rating	4 AWG 125 Amps

Packaging


Bag Qty	100
Master Bag Qty	1000

Certifications

UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

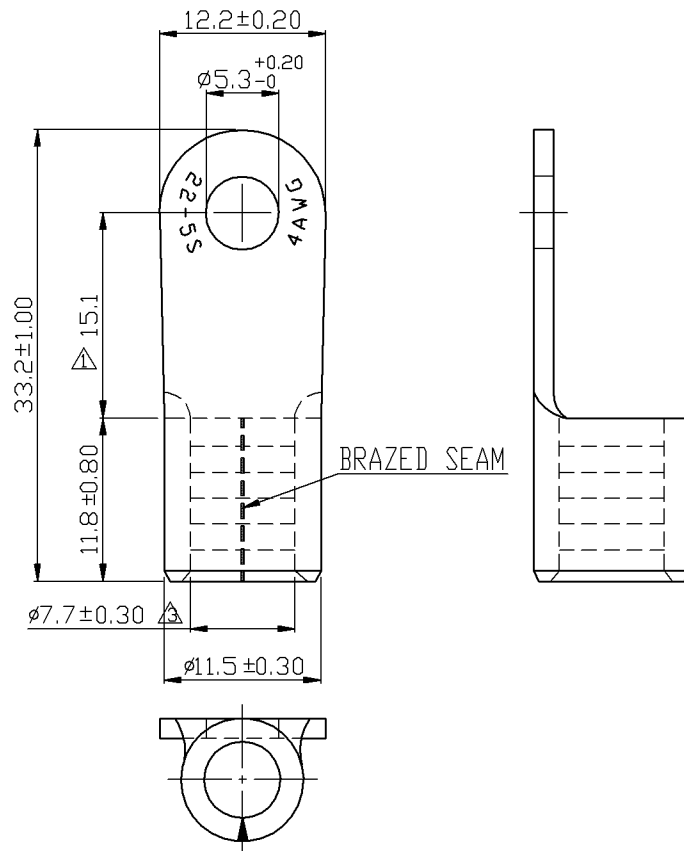

REV	DESCRIPTION	DATE
A	RDK-97127	2008/07/09
B	RDK-98020	2009/09/18
C	RDC-99171	2010/05/04

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	4		
AMP.	125		
2. WIRE RANGE : 4 A.W.G. (22 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.70 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0° >	° REF ±
>	mm ±	° >	° ±
>	mm ±	° >	° ±

NAME	NON-INSULATED RING TERMINALS			UNIT	mm	
PART NO.	11106	MATERIAL	COPPER	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2007/04/11	2/1	1-3	1 OF 2	DRAWN	

Morris Products Inc.