





SQUARE RECESSED RETROFIT DOWNLIGHT

6" 15W

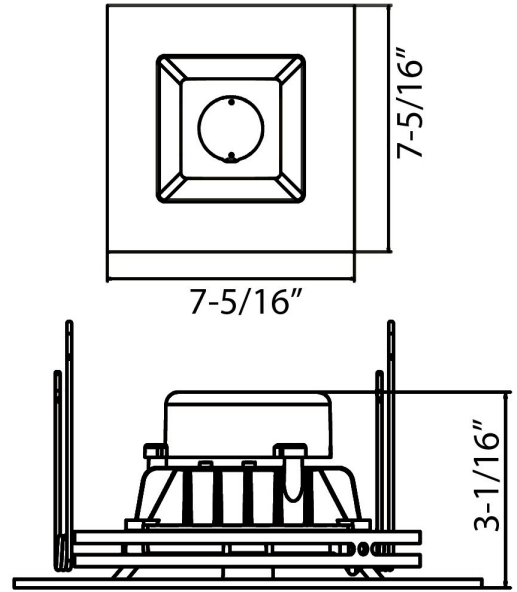

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Input Current @ 120V	Lumens/ Watt	Energy Star
72637	White	15W	971	5000K	120	.128A	65	Yes

PHOTOMETRY

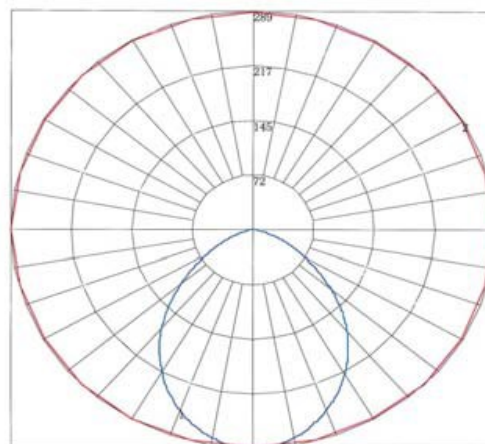

Maximum Candela = 289.05 Located At Horizontal Angle = 180, Vertical Angle = 1
 # 1 - Vertical Plane Through Horizontal Angles (180 - 0) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)



SQUARE RECESSED RETROFIT DOWNLIGHT

6" 15W

Technical Specifications:

Electrical:

Input Voltage: 120
Current: .128A @ 120V
Frequency: 60Hz
Power Factor: $\geq .97$

Product Parameters:

15 Watts
Efficacy: 65 lumens per watt
50,000+ LED Life Span
CCT: 5000k (Cool White)

Chromaticity Measurements:

Beam Angle: 107°
BUG Rating: N/A
CRI: ≥ 90
R9: 37
DUV: -0.00294
Chromaticity (x,y): x=.4404; y= .3977
Chromaticity (u,v): u=.2554; v= .3462

Component Specifications:

LED: Luxeon 3030 2D
Driver: 120V 50-60HZ
Driver Output Volts:
Driver Output Amps:
Surge Protection:

Dimming: Triac Dimming

Operating Temperature:

Minimum Starting -31° - 122° F

Construction:

Housing: Aluminum Housing/Trim
White Finish
IP Rating: IP44 Wet Indoor Location Rated
Lens Material: Frosted Polycarbonate Lens
Mounting: Retrofit Screw In Base

Listings: ETL, Energy Star

Carton Qty: 12

Weight: 1.4 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).