



Catalog Number 11108
UPC Number 60198611108
Description Non-Insulated Ring Terminals
 4 AWG



Features


- Non-Insulated
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Brazed seam prevents splitting under maximum pressure
- Wire range stamped on the surface for easy interpretation

General

Insulation Type None
 Material Copper
 Finish Electro-tin plated
 Color N/A
 Wire Range 4 AWG
 Stud Size 1/4

Dimension Information

L Inches (mm) 1.299
 W Inches (mm) 0.866
 D Inches (mm) 0.453
 d1 Inches (mm) 0.303
 d2 Inches (mm) 0.252
 E Inches (mm) 0.472
 F Inches (mm) 0.594
 T Inches (mm) 0.067

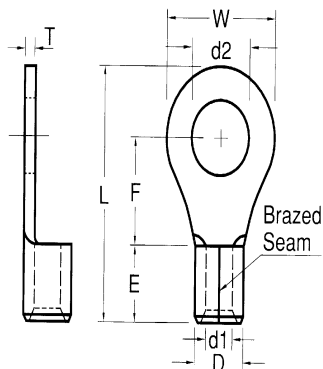

Specifications

Temperature Rating 150°C
 Voltage Rating 600 V
 Flammability Rating N/A
 Amp Rating 4 AWG 125 Amps

Packaging


Bag Qty 100
 Master Bag Qty 1000

Certifications

UL Yes
 cUL Yes
 RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

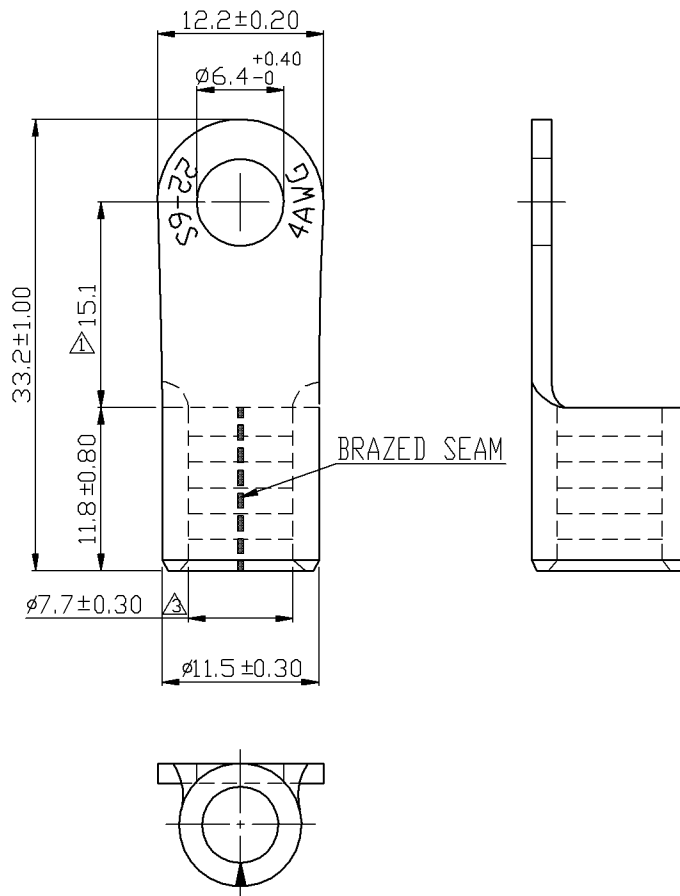

REV	DESCRIPTION	DATE
△	RDK-97127	2008/07/09
△	RDK-98020	2009/09/18
△	RDC-99171	2010/05/04

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	4		
AMP.	125		
2. WIRE RANGE : 4 A.W.G. (22 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.70 mm

Tolerance Unless Otherwise Specified			
0	>	mm ±	ANGLE
>		mm ±	0° REF ±
>		mm ±	° ±
>		mm ±	° ±

NAME	NON-INSULATED RING TERMINALS				UNIT	mm	
PART NO.	11108	MATERIAL	COPPER	APPROVE			
NUMBER		SCALE	SHEET	PAGE	CHECKED		
DATE	2006/10/17	2/1	1-3	10F2	DRAWN		

Morris Products Inc.