



Catalog Number	11100
UPC Number	60198611100
Description	Non-Insulated Ring Terminals 6 AWG



Features


- Non-Insulated
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Brazed seam prevents splitting under maximum pressure
- Wire range stamped on the surface for easy interpretation

General

Insulation Type	None
Material	Copper
Finish	Electro-tin plated
Color	N/A
Wire Range	6 AWG
Stud Size	7/16

Dimension Information

L Inches (mm)	1.614
W Inches (mm)	0.866
D Inches (mm)	0.354
d1 Inches (mm)	0.228
d2 Inches (mm)	0.453
E Inches (mm)	0.413
F Inches (mm)	0.78
T Inches (mm)	0.059

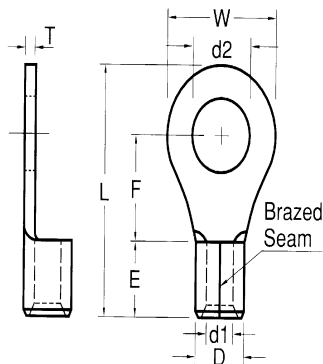

Specifications

Temperature Rating	150°C
Voltage Rating	600 V
Flammability Rating	N/A
Amp Rating	6 AWG 95 Amps

Packaging


Bag Qty	100
Master Bag Qty	1000

Certifications

UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

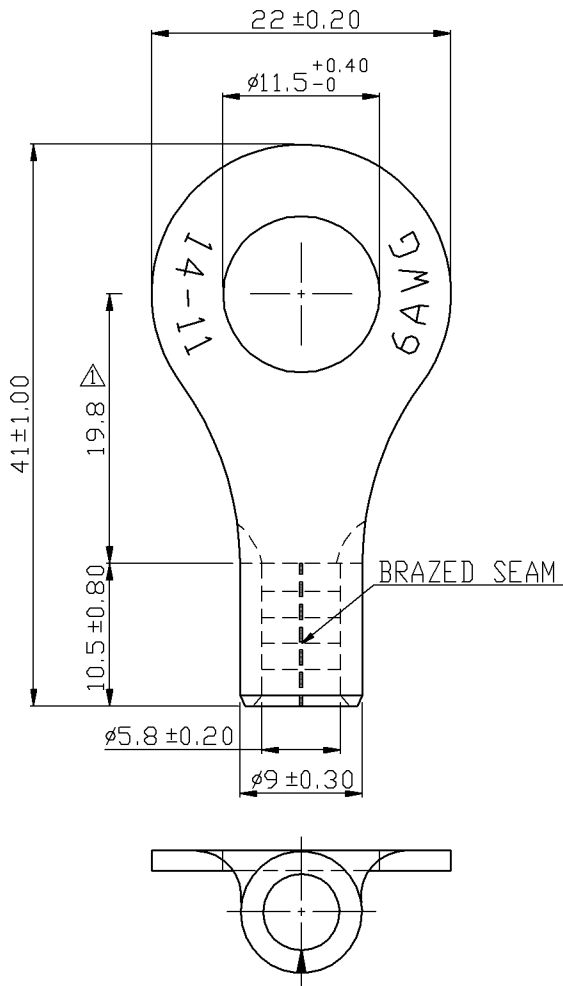

REV	DESCRIPTION	DATE
△	RDK-97127	2008/08/28
△	RDK-98020	2009/09/18

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	6		
AMP.	95		
2. WIRE RANGE : 6 A.W.G. (14 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.50 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0°	REF ±
>	mm ±	°	±
>	mm ±	°	±

NAME	NON-INSULATED RING TERMINALS			UNIT	mm	
PART NO.		MATERIAL	COPPER	APPROVE		
NUMBER	11100	SCALE	SHEET	PAGE	CHECKED	
DATE	2006/09/02	2/1	1-2	10F2	DRAWN	

Morris Products Inc.