

Part No: 1922-020

EverTUFF® CTS

Commercial & Residential Ball Valve

Desc: 2 CPVC CTS BALL VALVE SOC EPDM

MSRP: 162.86

Part Code: 217

Weight(lbs): 1.446


Weight(kg): 0.656

Weight(gm): 656

Size: 2"

Color: TAN

Material: CPVC

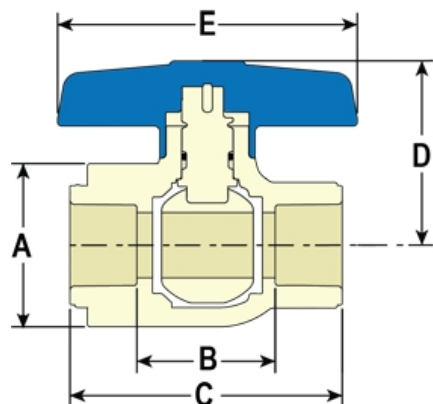

Type CTS Commercial Ball Valve
Connection Socket x Socket
O-Ring EPDM
NSF® Certified LEAD FREE
Pressure Rating 100 psi Max Internal Pressure @ 180° F

A = 3-19/32

B = 2-25/32

C = 5-1/8

D = 3-27/32

E = 4-31/32

Cv = 598

Values

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

