

► Code Number

3981799

► Description

Exposed Water Closet Flushometer, for back inlet squat toilets.

► Flush Cycle

□ 1.6 gpf/6.0Lpf

► Specifications

- Quiet, Exposed, Diaphragm Type, Chrome Plated Closet Flushometer with the following features:
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop
- Spud Coupling and Spud Flange for 1½" Top Spud
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Control Stop Plug
- Sweat Solder Adapter with Cover Tube
- Cast Wall Flange with Set Screw
- Vacuum Breaker Flush Connection
- Low Consumption flush accuracy controlled by Para-Flo™ Technology


Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories

► Fixtures

Consult factory for matching Sloan brand fixture options.

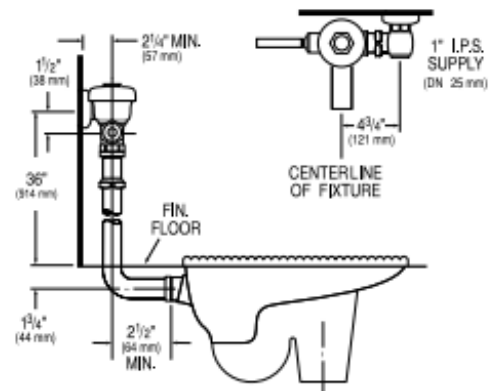

► Compliance & Certifications



This space for Architect/Engineer Approval