

Part No: 4251-007

FlameGuard®

Flange

Desc: 3/4 CPVC FG SOLID FLANGE SOC CL150

MSRP: 7.56

Part Code: 070

Weight(lbs): 0.311

Weight(kg): 0.141

Weight(gm): 141

Size: 3/4"


Color: ORANGE

Material: CPVC

Type Flange - One Piece

Connection Socket

Pressure Rating 175 psi (1.21 Mpa) @ 150° F

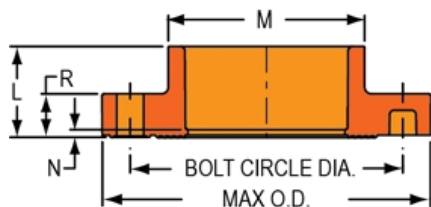

L = 1- 5/32

M = 1- 1/2

N = 1/8

R = 5/8

No of Bolts = 4

Bolt Circle Dia. = 2- 3/4

Bolt Size = 1/2

Max. O.D. = 3-29/32

Min. Bolt Length = 2

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

