

Part No: 4256-025

FlameGuard®

Flange

Desc: 2-1/2 CPVC FG V/S FLANGE SPIGOT CL150

MSRP: 41.2

Part Code: 070

Weight(lbs): 1.653

Weight(kg): 0.75

Weight(gm): 750

Size: 2-1/2"


Color: ORANGE

Material: CPVC

Type Flange - Two Piece

Connection Spigot

Pressure Rating 175 psi (1.21 Mpa) @ 150° F

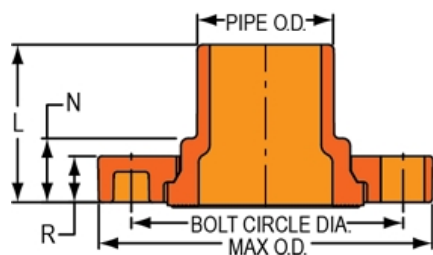

L = 3- 1/16

N = 1- 1/4

R = 1

No of Bolts = 4

Bolt Circle Dia. = 5- 1/2

Bolt Size = 5/8

Min. Bolt Length = 3-1/4

Max. O.D. = 6-15/16

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

