## Heat Traced Combination Shower with Eye/Face Wash System

**SPECIFICATION** 



#### **FEATURES:**

- Wrapped with heat trace cable, insulation, easy access shell to protect to  $-50^{\circ}F$
- Activated by Powder coated high visibility yellow, aluminum triangular pull rod
- 8 in. Diameter yellow plastic showerhead
- Freeze Valve activates automatically below 40°F
- 1 in. NPTF chrome plated brass stay-open ball valve
- 1 in. IPS galvanized steel pipe
- 1 in. NPT male, bottom supply inlet
- 20 gpm @ 30 psi
- Universal Emergency Sign Included

#### EYE/FACE WASH

- (2) yellow plastic spray outlets with automatic flow control and flip-top dust caps
- ½ in. NPT, 3-way chrome plated brass ball valve
- 4.5 gpm @ 30 psi
- Stainless steel push handle activation

#### ELECTRIC

- Self-regulating heating cable with braided metal shield
- Preset, hermetically sealed single pole contact switch. Temperature range 60° to 70° F thermostat
- Closed cell rubber foam insulation
- NEMA 4X water tight and dust tight, suitable for indoor or outdoor locations junction box
- 120 vac, 60 cycle, single phase
- Electrical Classification Class 1 Division 2 GRP. B, C, D
- Ground Fault Protection: Installation will require minimum 30 mA GFPD

#### COMPLIANCE:

Certified to ANSI/ISEA Z358.1, Factory Mutual Approved

### OPTIONS:

ADD SUFFIX TO MODEL #

#### **INTEGRAL**

• Drench hose option □ -DH • Immersion well thermometer □ -IT Scald protection valve □ -SPV-7000 □ -UN1

• 1½ in. union

FIELD INSTALLED ACCESSORIES

- Area light for non-hazardous locations clear globe □ -VPL
- Area light for Class 1 Division 2 areas clear globe □ -VPL-C1D2

#### Warranty:

• 3 year limited

SEE REVERSE FOR ROUGH-IN DIMENSIONS

#### THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

P: 800-537-2107 | F: 800-977-2747 WWW.SPEAKMANCOMPANY.COM

**REVISION DATE: JANUARY 2015** 




Management Systems Registered to ISO 9001

# **SPEAKMAN®**

# Heat Traced Combination Shower with Eye/Face Wash System SE-7000

**SPECIFICATION** 

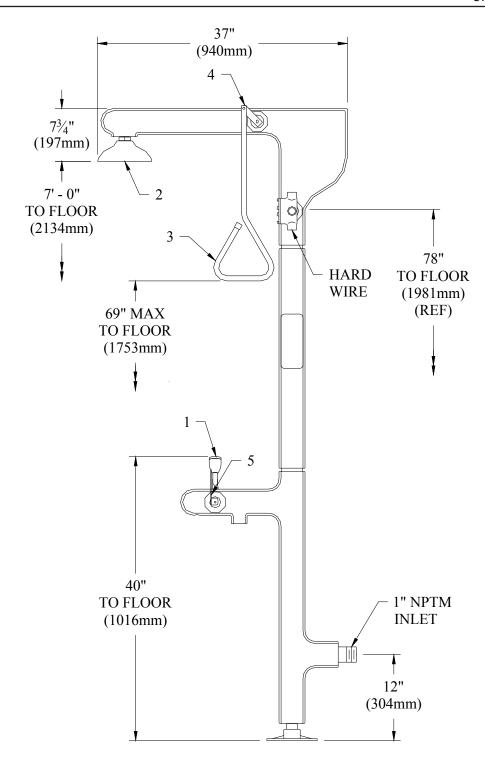

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

# **SPEAKMAN®**

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720 P: 800-537-2107 | F: 800-977-2747 W W W . S P E A K M A N C O M P A N Y . C O M

REVISION DATE: JANUARY 2015



Management Systems
Registered to ISO 9001