

**Part No:** 4433-012C

**Valves**

**Industrial Swing Check Valve**

**Desc:** 1-1/4 CPVC SWING CHECK VALVE FLANGED FKM

**MSRP:** 2082.48

**Part Code:** 109

**Weight(lbs):** 5.443

**Weight(kg):** 2.469

**Weight(gm):** 2469

**Size:** 1-1/4"


**Color:** GRAY

**Material:** CPVC

**Type** Standard

**O-Ring** FKM

**Pressure Rating** 150 PSI @ 73° F

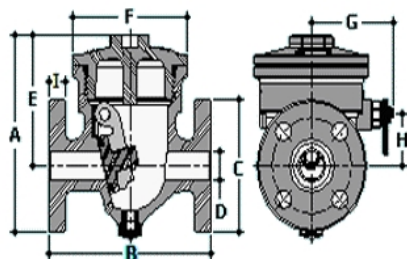

**A** = 7- 3/8

**B** = 7- 3/32

**C** = 5

**D** = 1-19/32

**E** = 4- 9/16

**F** = 5- 3/4

**Bolt Size** = 5/8

**G** = 3- 3/16

**H** = 1-27/32

**I** = 23/32

**Cv** = 70  
**Values**

**No of**  
**Bolts** = 4

**Bolt** = 3- 1/2  
**Circle**  
**Dia.**

## Injection Molded Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

**H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

**J** = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

**L** = Overall length of fittings; ± 1/16 inch.

**M** = Outside diameter of socket/thread hub; ± 1/16 inch.

**N** = Socket bottom to socket bottom; couplings; ± 1/16 inch.

**W** = Height of cap; ± 1/16 inch

## Typical Molded Dimension References

