

**Part No:** 4203-122SR

**FlameGuard®**

**Tee**

**Desc:** 1X1/2X1 CPVC FG SPRNKL R HD TEE W/SS RING

**MSRP:** 11.16

**Part Code:** 076

**Weight(lbs):** 0.214

**Weight(kg):** 0.097

**Weight(gm):** 97


**Size:** 1"X1/2"X1"

**Color:** ORANGE

**Material:** CPVC

**Connection** Socket x SR Fipt x Socket

**Type** Reduction

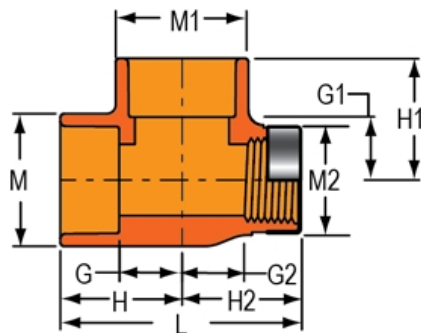

**G** = 23/32

**G1** = 23/32

**G2** = 1- 3/32

**M2** = 1- 3/16

**L** = 3-13/32

**M** = 1- 3/4

**M1** = 1- 3/4

**H** = 1-19/32

**H1** = 1- 5/8

**H2** = 1-25/32

## Injection Molded Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

**H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

**J** = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

**L** = Overall length of fittings; ± 1/16 inch.

**M** = Outside diameter of socket/thread hub; ± 1/16 inch.

**N** = Socket bottom to socket bottom; couplings; ± 1/16 inch.

**W** = Height of cap; ± 1/16 inch

## Typical Molded Dimension References

