

Part No: 4256-030

FlameGuard®

Flange

Desc: 3 CPVC FG V/S FLANGE SPIGOT CL150

MSRP: 48.06

Part Code: 070

Weight(lbs): 1.936

Weight(kg): 0.878

Weight(gm): 878

Size: 3"


Color: ORANGE

Material: CPVC

Type Flange - Two Piece

Connection Spigot

Pressure Rating 175 psi (1.21 Mpa) @ 150° F

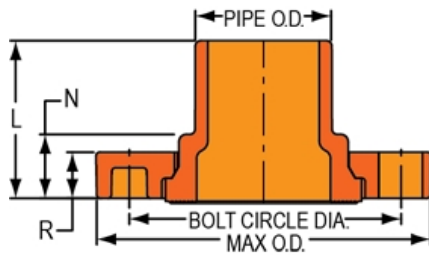

L = 3-5/16

N = 1-9/32

R = 1- 1/32

No of Bolts = 4

Bolt = 6
Circle
Dia.

Bolt Size = 5/8

Min. Bolt Length = 3-1/4

Max. = 7-9/16
O.D.

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

