

Drake® II Close Coupled Toilet, 1.28GPF

FEATURES

- Tornado Flush™ system, low consumption (1.28GPF/4.8LPF)
- CeFiONtect™ ceramic glaze prevents debris, and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Universal Height
- Decorative two-piece design with high-profile tank
- Round front bowl and tank set, less seat
- Chrome trip lever
- 12" Rough-in, less supply

MODELS

- CST453CEFG
With CeFiONtect ceramic glaze (#01, #03, #11, #12)
- CST453CEF
Same as above less CeFiONtect (#51 Only)
- CST453CEFRG
With right-hand trip lever, CeFiONtect ceramic glaze

COMPONENTS

- C453CUFG Round front bowl with CeFiONtect
- C453CUF Round front bowl, less CeFiONtect
- ST454E Tank and cover only
- ST454ER Tank and cover only, right-hand trip lever
- SS113 SoftClose® seat (sold separately)

COLORS/FINISHES

- Standard
 - #01 Cotton
 - #03 Bone
 - #11 Colonial White
 - #12 Sedona Beige
 - #51 Ebony (not available in CeFiONtect)

PRODUCT SPECIFICATION

The Two-piece low consumption Tornado Flush system toilet shall be 1.28GPF/4.8LPF. Toilet shall have optional CeFiONtect ceramic glaze and be at Universal Height. Toilet shall have high-profile tank, round front bowl and Chrome trip lever. Toilet shall be TOTO Model CST453CEF_____.



CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- BAA Buy American Act Compliant



CST453CEF(R)(G)

Drake® II Close Coupled Toilet, 1.28GPF

SPECIFICATIONS



- Water Use 1.28GPF/4.8LPF
- Flush System Tornado Flush™
- Min. Water Pressure 8 psi (static)
- Water Surface 6-7/8" x 8-7/8"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight C453CUF(G) 59.0lbs.
ST454E(R) 31.5lbs.
- Shipping Dimensions C453CUF(G)
27-1/2" L X 15-1/2" W1 X
11-1/4" W2 X 17-1/2" H

ST454E(R)
18" L X 9" W X 16" H

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

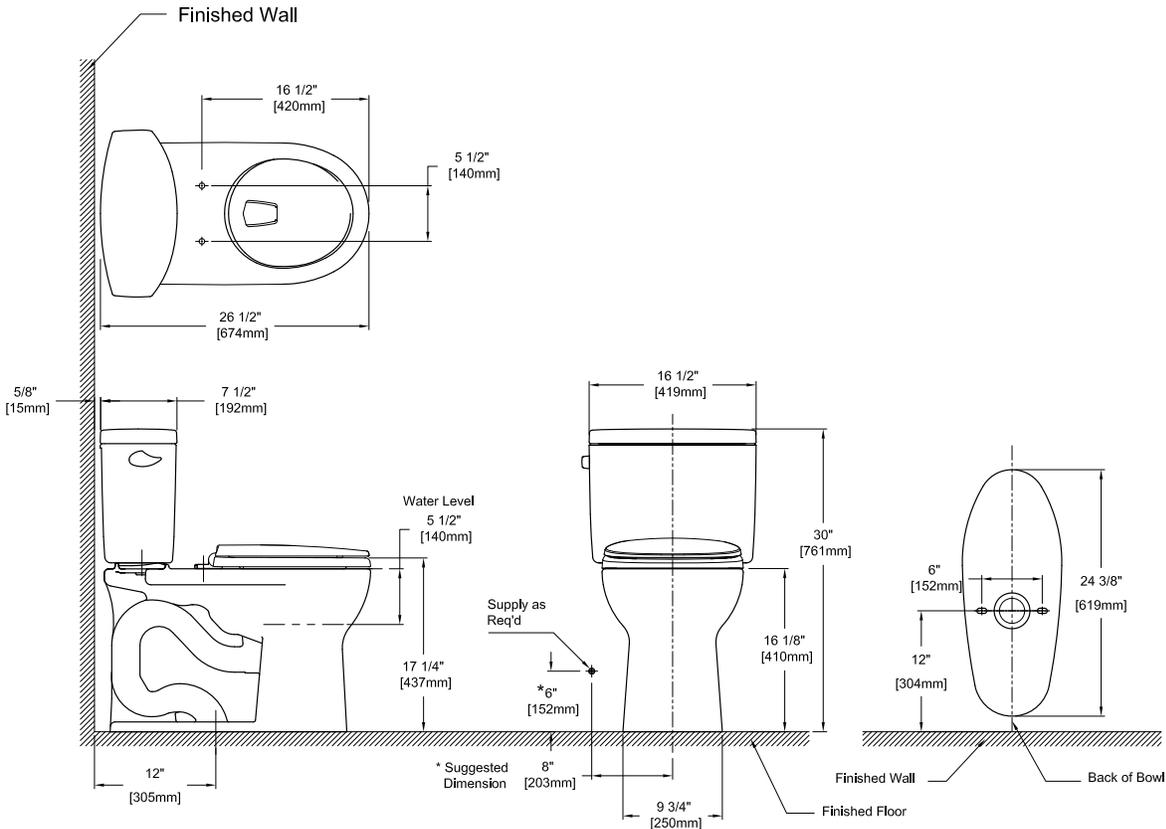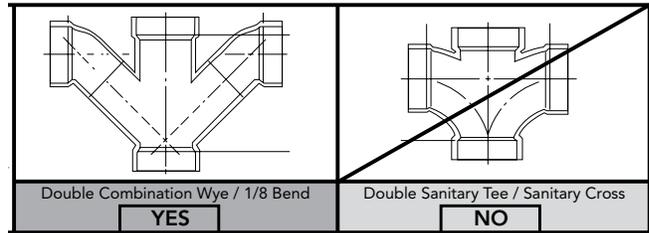

TOTO®

These dimensions and specifications are subject to change without notice