The patented Woodford RHY2-MS is intended for irrigation purposes and to provide water availability on commercial building roofs. Applications include window washing, cleaning of condenser coils, cooling towers and other types of roof equipment. The RHY2 is backflow protected with an ASSE 1052 double check backflow preventer that is field testable. The backflow device does not require removal for drain down. The RHY2 has a built in vent that allows drainage. Valve body of hydrant is drilled and tapped with \%" drain hole which must be piped to a drain location.

The RHY2-MS allows for installation flexibility since it is not necessary to install hydrant when the patented Mounting System is bolted to the roof. The Mounting System utilizes a 3"opening that allows the hydrant to be installed later if desired. All necessary mounting hardware for proper installation on a commercial roof is supplied, including a 2 degree shim for pitch adjustment.

Hydrant Features:

- Rod guide eliminates side pull on rod, reduces wear on packing, packing nut & stem.
- Adjustable link for easy adjustment and positive lever lock tension.
- One piece variable flow plunger with large cushion type seal for longer life is not easily damaged and assures shut-off even when foreign particles are present.
- Hydrant automatically drains when shut off even with hose attached.
- All hydrant repairs can be made from top of unit without removing hydrant. Parts are readily available.

Specifications:

- Hose Connection Backflow Preventer:
 - Model 50HF with ¾" hose connection
 - ASSE 1052 Listed
 - Field Testable Dual Check holds against 125 psi backflow pressure
- 1" NPT female inlet connection
- 1 ¼" U.S. made galvanized pipe casing
- Maximum Working Pressure: 100 p.s.i.
- Maximum Temperature: 120° F
- 1/8" NPT Drain hole (Must be piped to a drain location)

Mounting System: (Can be ordered Separately)

- Cast iron Hydrant Support
- Cast iron Under Deck Flange
 - 4 bolts draw tight against the roof decking and the hydrant support.
 - 3 clamp screws tighten against the hydrant pipe to secure the hydrant's vertical position through the roof
- Well Seal seals tight between the hydrant support and hydrant pipe.
- EPDM Boot covers well seal and top of hydrant support.
- 2° Shim is supplied, if needed, for installation on pitched roofs.

Manufactured under U.S. patent 7,472,718; 7,730,901 and patents pending.


For Installation / Troubleshooting Instructions go to www.woodfordmfg.com or call 1-800-621-6032


Freezeless Roof Hydrant



Model RHY2-MS

Can be ordered with or without Mounting System (MS).

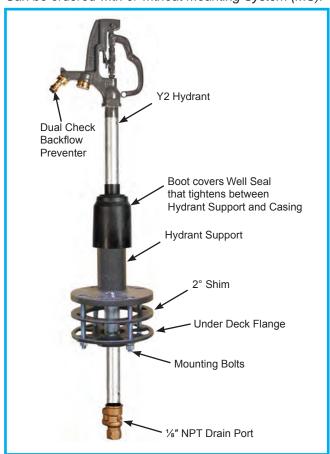




Rev. 02/12 Form No. RHY2.105





| | MODEL | RHY2-MS PARTS LIST |
|------|---------|---|
| ITEM | PART# | DESCRIPTION |
| | 15245 | RHY2 Head Assembly (Includes Items 1-16) |
| 1 | 10612 | RHY2 Head |
| 2 | 50HF-BR | 50HF Backflow Preventer - Brass |
| 3 | 15238 | Diverter Assembly |
| 4 | 10100 | Packing Nut |
| 5 | 10101 | Packing |
| 6 | 10102 | Packing Support Washer |
| 7 | 10104 | Brass Rod Stem |
| 8 | 10011 | Reducing Coupling |
| 9 | 10206 | Hex Nut (3) |
| 10 | 10614 | RH Upper Link |
| 11 | 15242 | RH Lower Link (Includes Item 12) |
| 12 | 10019 | Set Screw (2) |
| 13 | 15243 | RH Cam & Clevis Assembly |
| 14 | 10020 | Link Bolt (2) |
| 15 | 10021 | Lever Bolt |
| 16 | 10613 | RH Lever |
| 17 | 10017 | Valve Body (1" NPT Inlet) |
| 18 | 10106 | Plunger |
| 19 | 10023 | Operating Pipe (35-1/2" Long) |
| 20 | 10608 | Boot, EPDM 1 1/4" Pipe |
| 21 | 10606 | Bolt, Hex Head 1/4-20 X 1 3/4" (4) |
| 22 | 10582 | Well Seal, Top |
| 23 | 10609 | Well Seal, EPDM |
| 24 | 10583 | Well Seal, Bottom |
| 25 | 10584 | Bolt, Hex Head 5/8-11 X 6" (4) |
| 26 | 10579 | Hydrant Support, Casting |
| 27 | 10581 | 2° Shim, Casting |
| 28 | 10580 | Under Deck Flange |
| 29 | 10607 | Screw, Clamp 3/8-16 Hex Head X 1 3/4" (3) |
| 30 | 10604 | Washer, Plain 5/8 (4) |
| 31 | 10605 | Washer, Lock 5/8 (4) |
| 32 | 10585 | Nut, Hex 5/8-11 UNC (4) |
| | RK-Y1 | Repair Kit (Includes items 4-7 & 18) |
| | RK-RHL | Repair Kit (Includes items 9-15) |

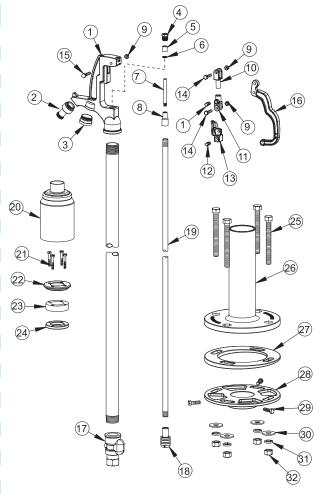

When ordering, specify RH part number option listed below.

Part# RHY2-MS


Consists of the complete Roof Hydrant system:

Qty.1 RHY2

Y2 Hydrant shipped in 1 carton.

Qty. 1 RH-MS Mounting System shipped in 1 carton.

Total Shipping Wt. 2 cartons: 50 lbs



Part# RH-MS

Carton contents consists of: Mounting System/ Rough-In Components (Parts 25-32 above)

- Hydrant Support
- 2° Shim,
- Under Deck Flange
- Mounting Bolts, Nuts, Washers.

Shipped in 1 Carton. Shipping Wt. - 30 lbs



Part# RHY2

Carton contents consists of:

- Y2 Hydrant Assembly (Parts 1-19 above)
- (Parts 1-19 above)
 Well Seal
- (Parts 21-24 above)
 Boot (Part 20 above)

Shipped in 1 Carton. Shipping Wt. - 20 lbs



For more information contact...

WOODFORD MANUFACTURING COMPANY