**The Timken Company**
4500 Mt Pleasant St. NW
N. Canton, OH 44720
**Phone:** (234) 262-3000
**E-Mail:** CustomerCAD@timken.com • **Web site:** www.timken.com

# Timken Part Number GYAE25RR, Fafnir® Setscrew Locking Ball Bearings



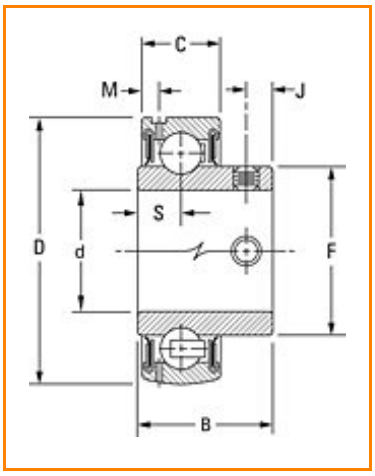


Specifications | Dimensions | Basic Load Ratings

## Specifications

| | |
|---|---|
| **Bore Size d** | 0.984 in<br>25 mm |
| **Bore Type** | Cylindrical bore |
| **Bearing Type** | Ball Bearing |
| **Seal Type** | Narrow Shroud |
| **Material** | Bearing Steel |
| **Lubrication Type** | Relubricatable |
| **O.D. Type** | Cylindrical OD |
| **Dimension M** | 0.142 in<br>3.61 mm |
| **Series** | Standard |

| | |
|---|---|
| **Weight** | 0.500 lb<br>0.200 Kg |
| **Sub Series** | GYAE..RR |

## Dimensions

| | |
|---|---|
| **Outside Diameter D** | 2.047 in<br>52.000 mm |
| **Inside Ring Width B** | 28.2 mm<br>1.110 in |
| **Outside Ring Width C** | 15.000 mm<br>0.591 in |
| **Radius r** | 0.6 mm<br>0.024 in |
| **Center of Bearing from End S** | 8.84 mm<br>0.348 in |
| **Dimension S1** | 19.36 mm<br>0.762 in |
| **Set Screw Distance S2** | 6.35 mm<br>0.250 in |
| **Set Screw Size** | M6X1 |
| **Number of Set Screws** | 2 |
| **Angle between Set Screws** | 90 º |

## Basic Load Ratings

| | |
|---|---|
| **Static Load Rating** | 1730 lbf<br>7700 N |
| **Dynamic Load Rating** | 3550 lbf<br>15800 N |

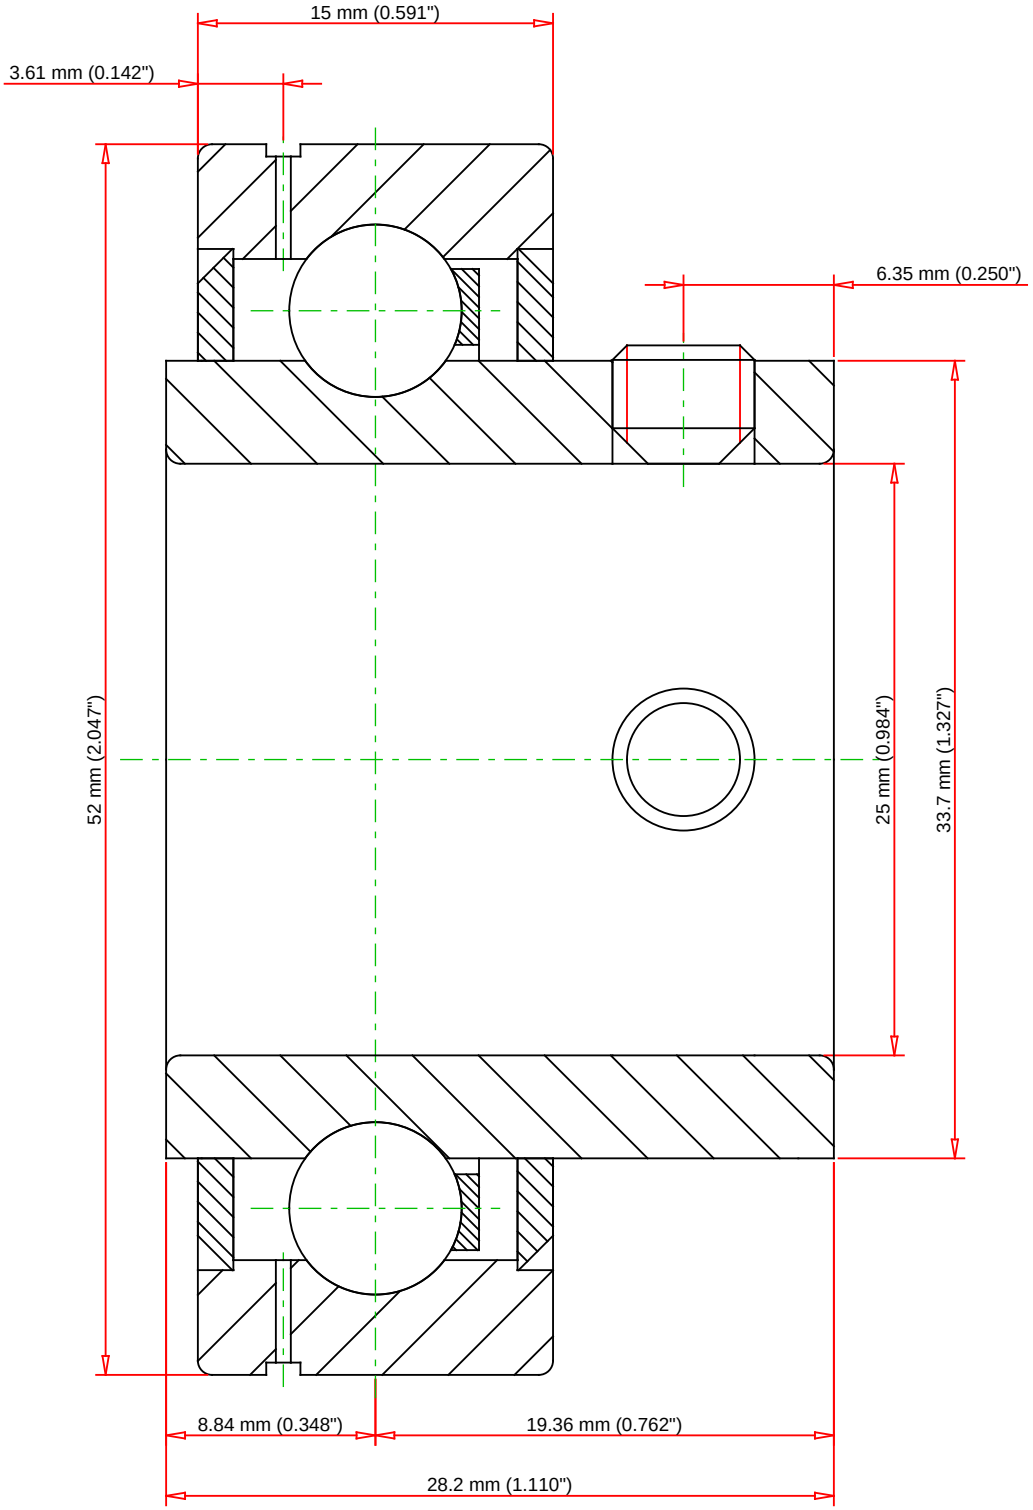


| | | |
|---|---|---|
| Weight | 0.5 lb | 0.2 kg |

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

# GYAE25RR

Fafnir® Setscrew Locking Ball Bearings

| | | |
|---|---|---|
| Basic Load Ratings - $C_r$ | 3550 lbf | 15800 N |
| Load Ratings - $C_{0r}$ | 1730 lbf | 7700 N |

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY