


The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number SNW-30 x 5 3/16, SNW/SNP – Pull-Type Sleeve, Locknut, Lockwasher/Lockplate Assemblies

- The table below shows dimensions for adapter assemblies and components used in the mounting of tapered bore bearings on shafts.
- SNW assembly consists of a sleeve, locknut and lockwasher.
- SNP assembly consists of a sleeve, locknut and lockplate.

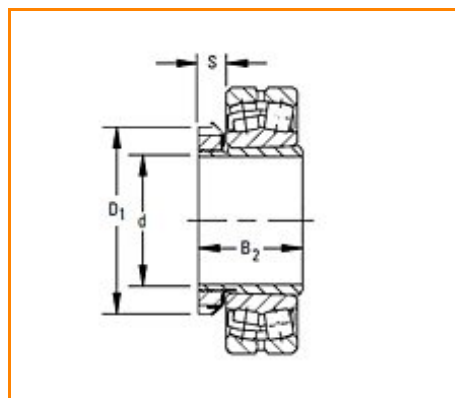

[Specifications](#) | [Shaft Dimensions](#) | [Adapter Dimensions](#) | [Accessory Numbers](#)

Specifications

Series	222K
Diameter d	5 3/16 in
Bearing Number	22230K
SNW/SNP Assembly Weight	13.50 lb

Shaft Dimensions

Tolerance¹	-0.005 in
------------------------------	-----------

Adapter Dimensions



B₂	4 15/64 in
S²	1 1/8 in
D₁	7 11/16 in

Accessory Numbers



Sleeve	S-30
Locknut	AN-30
Lockwasher and Lockplates	W-30

¹ Tolerance range is from +0 to value listed.

² Tolerance -0 to + 0.4 mm (-0 to +1/64 in)