



The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number YCJM2 3/16, Four-Bolt Flanged Units Setscrew Locking (Includes Industrial and Standard Series)

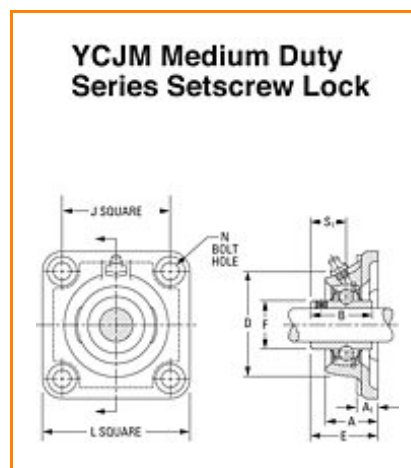

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bore Size d	2 3/16 in 55.6 mm
Bearing Number	GYM1203KRRB
Dimension D	5.374 in 136.5 mm
Dimension E	2.925 in 74.3 mm
Inside Ring Outside Diameter	3.011 in 76.48 mm
Series	Medium-Duty
Weight	9.69 lb 4.40 Kg

Seal Type

Shroud Seal

Dimensions

Total Length L 174.6 mm
6.874 in

Total Width A 1.937 in
49.2 mm

Bolt Hole Size N 16 mm
0.630 in

Flange Thickness A1 17.5 mm
0.689 in

**Center of Bearing from Housing
End A2** 35.2 mm
1.386 in

Inside Ring Width B N/A

Total Height 174.6 mm
6.874 in


Bolt Size M16

**Center of Bearing from Bearing
End S** 26 mm
1.024 in

Basic Load Ratings

Static Load Rating 8000 lbf
35600 N

Dynamic Load Rating 13200 lbf
58800 N

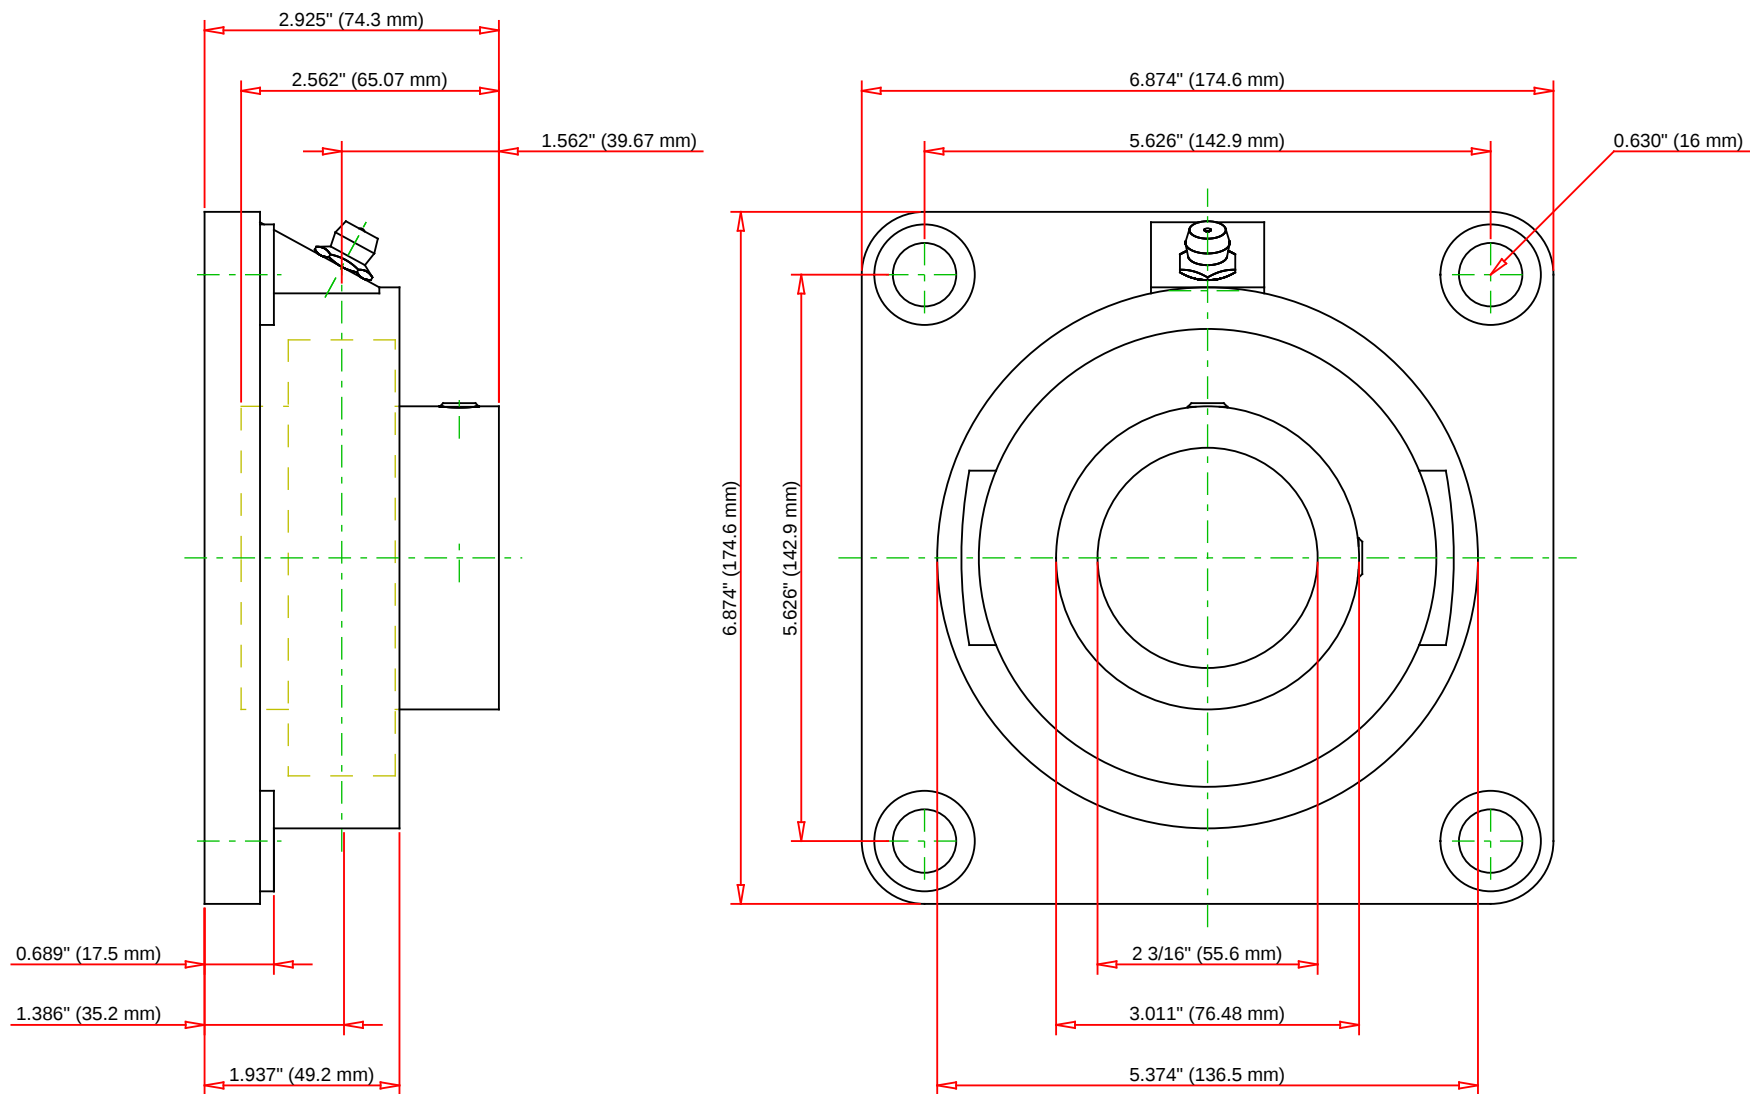

Bearing Number	GYM1203KRRB			
Load Ratings - C _r	13200	lbf	58800	N
Load Ratings - C _{0r}	8000	lbf	35600	N
Weight	0	lb	0	kg
Bolt Size	M10x1.5			

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

YCJM2 3/16

Four-Bolt Flanged Units Setscrew Locking
(Includes Industrial and Standard Series)

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY