The Timken Company
4500 Mt Pleasant St. NW
N. Canton, OH 44720
Phone: (234) 262-3000
E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number YAK 2 15/16, Pillow Block Units Setscrew Locking (Includes Industrial and Standard Series)



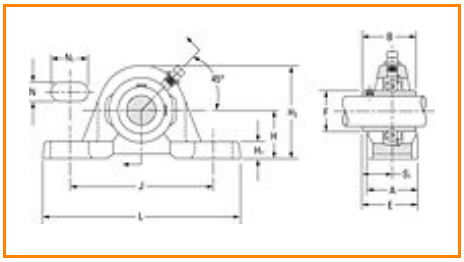

Specifications | Dimensions | Basic Load Ratings

Specifications

Bore Size d	2 15/16 in 74.6 mm
Bearing Number	GY1215KRRB
Inside Ring Outside Diameter	3.619 in 91.9 mm
Dimension B1	3.063 in 77.8 mm
Dimension T	1.626 in 41.3 mm
Dimension D1	3.618 in 91.9 mm
Series	Industrial
Weight	18.780 lb 8.5185 Kg

Seal Type	Shroud Seal

Dimensions

Shaft Height H	84.14 mm 3.313 in
Total Length L	304.8 mm 12.000 in
Total Width A	3.252 in 82.60 mm
Bolt Hole Spacing J	241.3 mm 9.500 in
Bolt Hole Width N	22.2 mm 0.874 in
Bolt Hole Length N1	31.8 mm 1.252 in
Base Height H1	38.1 mm 1.500 in
Total Height H2	163.5 mm 6.437 in
Dimension L1	101.6 mm 4.000 in
Inside Ring Width B	N/A
Center of Bearing from End S	33.3 mm 1.311 in

Basic Load Ratings

Static Load Rating	9800 lbf 43600 N

Dynamic Load Rating	15600 lbf 69500 N

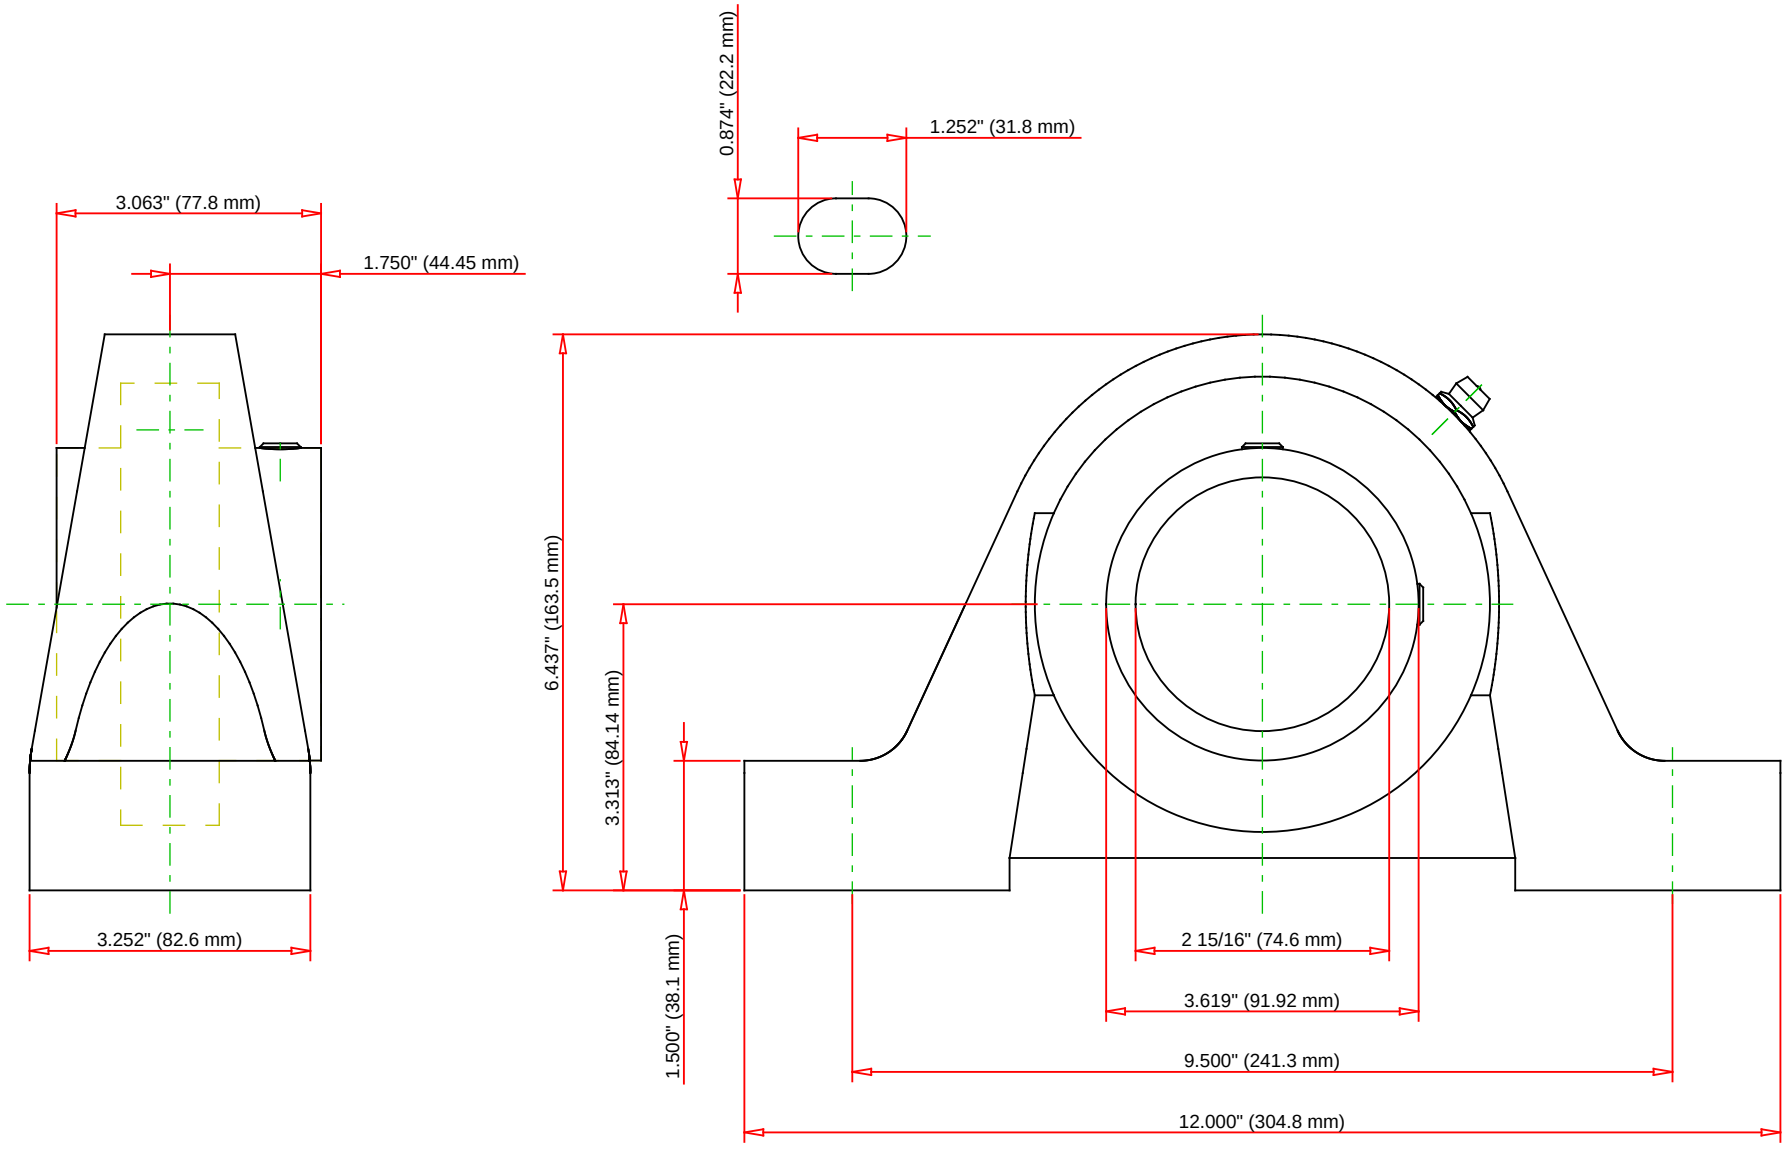

Bearing Number	GY1215KRRB				
Load Ratings - C_r	15600	lbf	69500	N	
Load Ratings - C_{0r}	9800	lbf	43600	N	
Weight	18.78	lb	8.5185	kg	
Bolt Size	M12x1.75				

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

YAK 2 15/16

Pillow Block Units Setscrew Locking (Includes Industrial and Standard Series)

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY